DocuSign Envelope ID: 2CBE69AC-BA62-466A-BFD4-8D07A1A379CD

TIP NO.	SHEET NO.
R-2707D	SIGN-4A

APPROVED: Betsy L. Watson (DocuSigned by: 35E67BB34F8743F...)

DATE: 4/27/2023

SEAL

NORTH CAROLINA PROFESSIONAL SEAL 29449 ENGINEER BETSY L. WATSON

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

Stantec

SIGN NUMBER: 5A
TYPE: B
QUANTITY: 1

SIGN WIDTH: 132″
HEIGHT: 30″
TOTAL AREA: 27.5 Sq.Ft.

BORDER TYPE: FLUSH
RADII: 3″
WIDTH: 2″
RECESS: 0″

NO. Z BARS: 2
LENGTH: 124.0

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT

MAT'L: 0.125″ (3.2MM) ALUMINUM

DESIGN BY: RRH
PROJECT ID: R-2707D
CHECKED BY: BLW
DIV: 12
DATE: Feb 05, 2018

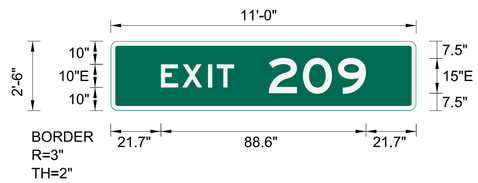

Spacing Factor is 1 unless specified otherwise

USE NOTES

1. Legend and border (except those that are colored black) shall be direct applied Grade A sheeting.
2. Background shall be Grade C reflective sheeting.

LETTER POSITIONS

Letter spacings are to start of next letter

							Series/Size Text Length
	E	X	I	T			E 2000
21.7	9.2	11.1	3.8	7.5	78.7		31.6
	2	0	9				E 2000
68.3	14.7	15.2	12.2	21.7			42

SIGN NUMBER: 5B
TYPE: A
QUANTITY: 1

SIGN WIDTH: 210″
HEIGHT: 156″
TOTAL AREA: 227.5 Sq.Ft.

BORDER TYPE: FLUSH
RADII: 12″
WIDTH: 2″
RECESS: 0″

NO. Z BARS: 4
LENGTH: 202.0

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT

MAT'L: 0.125″ (3.2MM) ALUMINUM

DESIGN BY: RRH
PROJECT ID: R-2707D
CHECKED BY: BLW
DIV: 12
DATE: Feb 10, 2018

Spacing Factor is 1 unless specified otherwise

USE NOTES

1. Legend and border (except those that are colored black) shall be direct applied Grade A sheeting.
2. Background shall be Grade C reflective sheeting.
3. Shields; A, B, and C type arrows shall be on 0.032″ (0.8mm) aluminum and demountable.
4. Bottom panel shall be yellow Grade C sheeting on background with black recessed border. RADII:11.5″ THICKNESS:1.5″ RECESS:0.5″

LETTER POSITIONS

Letter spacings are to start of next letter

																						Series/Size Text Length
	B	e	t	h	l	e	h	e	m		R	d										EM 2000
17.5	16	13.9	13.4	17	8.2	15.5	15.5	15.5	17.6	16	15.8	10.6	17.5									175
	D	a	v	i	d		B	a	p	t	i	s	t									EM 2000
18.2	16.3	15.2	17	8.2	10.6	16	16	17	13.9	13.4	7.8	13.9	8.3	18.2								173.6
	C	h	u	r	c	h		R	d													EM 2000
39.9	17.4	17	17	10.4	15.5	10.6	16	15.8	10.6	39.9												130.2
	3/4		M	I	L	E																E 2000
68.5	25	15	12	4.4	9.2	7.5	68.5															73.1

SIGN NUMBER: 6
TYPE: A
QUANTITY: 1

SIGN WIDTH: 120″
HEIGHT: 120″
TOTAL AREA: 100.0 Sq.Ft.

BORDER TYPE: RECESSED
RADII: 12″
WIDTH: 1.5″
RECESS: 0.5″

NO. Z BARS: 3
LENGTH: 112.0

BACKG COLOR: Yellow
COPY COLOR: Black

SYMBOL	X	Y	WID	HT
ARDOWN	44	8.1	32	22

MAT'L: 0.125″ (3.2MM) ALUMINUM

DESIGN BY: RRH
PROJECT ID: R-2707D
CHECKED BY: BLW
DIV: 12
DATE: Feb 05, 2018



Spacing Factor is 1 unless specified otherwise

USE NOTES

1. Legend and border shall be direct applied black non-reflective sheeting.
2. Background shall be Grade C reflective sheeting.
3. Shields; A, B, and C type arrows shall be on 0.032″ (0.8mm) aluminum and demountable.

LETTER POSITIONS

Letter spacings are to start of next letter

																						Series/Size Text Length
	L	A	N	E																		E 2000
31.2	12.5	17.8	16	11.3	31.2																	57.6
	E	N	D	S																		E 2000
31.4	14.3	16	14.7	12.2	31.4																	57.2
	8	0	0		F	T																E 2000
19.2	14.7	15.6	12.6	15	12.5	11.3	19.2															81.6

SIGN NUMBER: 8A,9A,10A
TYPE: B
QUANTITY: 3

SIGN WIDTH: 132″
HEIGHT: 30″
TOTAL AREA: 27.5 Sq.Ft.

BORDER TYPE: FLUSH
RADII: 3″
WIDTH: 2″
RECESS: 0″

NO. Z BARS: 2
LENGTH: 124.0

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT

MAT'L: 0.125″ (3.2MM) ALUMINUM

DESIGN BY: RRH
PROJECT ID: R-2707D
CHECKED BY: BLW
DIV: 12
DATE: Mar 10, 2023

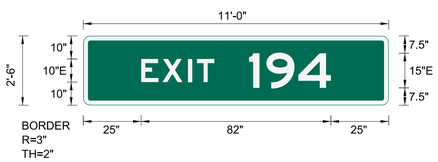

Spacing Factor is 1 unless specified otherwise

USE NOTES

1. Legend and border (except those that are colored black) shall be direct applied Grade A sheeting.
2. Background shall be Grade C reflective sheeting.

LETTER POSITIONS

Letter spacings are to start of next letter

																						Series/Size Text Length
	E	X	I	T																		E 2000
25	9.2	11.1	3.8	7.5	75.4																	31.6
	1	9	4																			E 2000
71.6	7.5	13.8	14.1	25																		35.4

OVERHEAD SIGNS

$$$$SYSTIME$$$$
$$$$