DocuSign Envelope ID: 2CBE69AC-BA62-466A-BFD4-8D07A1A379CD

| TIP NO. | SHEET NO. |
|---|---|
| R-2707D | SIGN-4F |

APPROVED: Betsy L. Watson (DocuSigned by: 35E67BB34F8743F...)

DATE: 4/27/2023

SEAL

NORTH CAROLINA PROFESSIONAL SEAL 29449 ENGINEER BETSY L. WATSON

**DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED**

Stantec

SIGN NUMBER: 103B
TYPE: A
QUANTITY: 1

SIGN WIDTH: 132″
HEIGHT: 120″
TOTAL AREA: 110.0 Sq.Ft.

BORDER TYPE: FLUSH
RADII: 12″
WIDTH: 2″
RECESS: 0″

NO. Z BARS: 3
LENGTH: 124.0

BACKG COLOR: Green
COPY COLOR: White

| SYMBOL | X | Y | WID | HT |
|---|---|---|---|---|
| M1_4 | 16.1 | 69.4 | 36 | 36 |

MAT'L: 0.125″ (3.2MM) ALUMINUM

DESIGN BY: RRH
PROJECT ID: R-2707D
CHECKED BY: BLW
DIV: 12
DATE: Feb 06, 2018

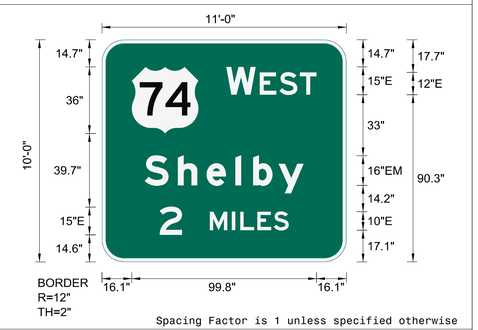


Spacing Factor is 1 unless specified otherwise

USE NOTES

1. Legend and border (except those that are colored black) shall be direct applied Grade C sheeting.
2. Background shall be Grade C reflective sheeting.
3. Shields; A, B, and C type arrows shall be on 0.032″ (0.8mm) aluminum and demountable.

LETTER POSITIONS

Letter spacings are to start of next letter

| | | | | | | | | | | | | | | | | | | | | | | Series/Size Text Length |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | W | | E | S | T | | | | | | | | | | | | | | | | | E 2000 |
| 67.1 | 15.9 | 2.2 | 10.7 | 11 | 9 | 16.1 | | | | | | | | | | | | | | | | 48.8 |
| | S | h | e | l | b | y | | | | | | | | | | | | | | | | EM 2000 |
| 23 | 17.9 | 15.5 | 15.5 | 9.6 | 13.8 | 13.6 | 23 | | | | | | | | | | | | | | | 85.9 |
| | 2 | | M | I | L | E | S | | | | | | | | | | | | | | | E 2000 |
| 31.1 | 12.2 | 15 | 12 | 4.4 | 9.2 | 8.9 | 8.1 | 31.1 | | | | | | | | | | | | | | 69.8 |

SIGN NUMBER: 104B
TYPE: A
QUANTITY: 1

SIGN WIDTH: 216″
HEIGHT: 132″
TOTAL AREA: 198.0 Sq.Ft.

BORDER TYPE: FLUSH
RADII: 12″
WIDTH: 2″
RECESS: 2″

NO. Z BARS: 3
LENGTH: 208.0

BACKG COLOR: Green
COPY COLOR: White

| SYMBOL | X | Y | WID | HT |
|---|---|---|---|---|
| NC243A | 56 | 64.8 | 36 | 36 |
| NC243A | 124 | 64.8 | 36 | 36 |

MAT'L: 0.125″ (3.2MM) ALUMINUM

DESIGN BY: RRH
PROJECT ID: R-2707D
CHECKED BY: BLW
DIV: 12
DATE: Mar 28, 2023

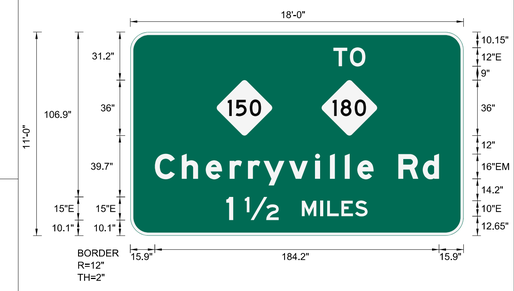


Spacing Factor is 1 unless specified otherwise

USE NOTES

1. Legend and border (except those that are colored black) shall be direct applied Grade C sheeting.
2. Background shall be Grade C reflective sheeting.
3. Shields; A, B, and C type arrows shall be on 0.032″ (0.8mm) aluminum and demountable.

LETTER POSITIONS

Letter spacings are to start of next letter

| | | | | | | | | | | | | | | | | | | | | | | Series/Size Text Length |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | T | O | | | | | | | | | | | | | | | | | | | | E 2000 |
| 131.6 | 10.7 | 10.1 | 63.6 | | | | | | | | | | | | | | | | | | | 20.8 |
| | C | h | e | r | r | y | v | i | l | l | e | | R | d | | | | | | | | EM 2000 |
| 15.9 | 17.4 | 15.5 | 15.5 | 11.8 | 10.1 | 16.5 | 17 | 9.6 | 9.6 | 8.2 | 10.6 | 16 | 15.8 | 10.6 | 15.9 | | | | | | | 184.2 |
| | 1 | | 1/2 | | M | I | L | E | S | | | | | | | | | | | | | E 2000 |
| 62.2 | 4.5 | 7.5 | 22 | 15 | 12 | 4.4 | 9.2 | 8.9 | 8.1 | 62.2 | | | | | | | | | | | | 91.6 |

SIGN NUMBER: 105B
TYPE: A
QUANTITY: 1

SIGN WIDTH: 132″
HEIGHT: 120″
TOTAL AREA: 110.0 Sq.Ft.

BORDER TYPE: FLUSH
RADII: 12″
WIDTH: 2″
RECESS: 0″

NO. Z BARS: 3
LENGTH: 124.0

BACKG COLOR: Green
COPY COLOR: White

| SYMBOL | X | Y | WID | HT |
|---|---|---|---|---|
| M1_4 | 16.1 | 69.4 | 36 | 36 |

MAT'L: 0.125″ (3.2MM) ALUMINUM

DESIGN BY: RRH
PROJECT ID: R-2707D
CHECKED BY: BLW
DIV: 12
DATE: Feb 06, 2018

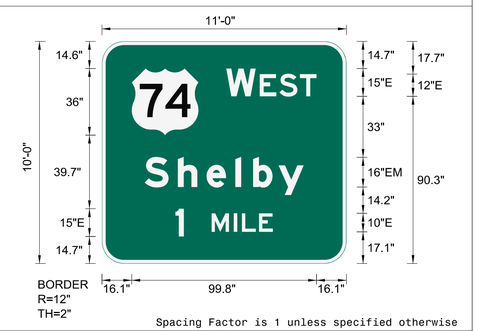


Spacing Factor is 1 unless specified otherwise

USE NOTES

1. Legend and border (except those that are colored black) shall be direct applied Grade C sheeting.
2. Background shall be Grade C reflective sheeting.
3. Shields; A, B, and C type arrows shall be on 0.032″ (0.8mm) aluminum and demountable.

LETTER POSITIONS

Letter spacings are to start of next letter

| | | | | | | | | | | | | | | | | | | | | | | Series/Size Text Length |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | W | | E | S | T | | | | | | | | | | | | | | | | | E 2000 |
| 67.1 | 15.9 | 2.2 | 10.7 | 11 | 9 | 16.1 | | | | | | | | | | | | | | | | 48.8 |
| | S | h | e | l | b | y | | | | | | | | | | | | | | | | EM 2000 |
| 23 | 17.9 | 15.5 | 15.5 | 9.6 | 13.8 | 13.6 | 23 | | | | | | | | | | | | | | | 85.9 |
| | 1 | | M | I | L | E | | | | | | | | | | | | | | | | E 2000 |
| 39.7 | 4.5 | 15 | 12 | 4.4 | 9.2 | 7.5 | 39.7 | | | | | | | | | | | | | | | 52.6 |

SIGN NUMBER: 106
TYPE: A
QUANTITY: 1

SIGN WIDTH: 192″
HEIGHT: 66″
TOTAL AREA: 88.0 Sq.Ft.

BORDER TYPE: FLUSH
RADII: 9″
WIDTH: 2″
RECESS: 0″

NO. Z BARS: 2
LENGTH: 184.0

BACKG COLOR: Blue
COPY COLOR: White

| SYMBOL | X | Y | WID | HT |
|---|---|---|---|---|

MAT'L: 0.125″ (3.2MM) ALUMINUM

DESIGN BY: RRH
PROJECT ID: R-2707D
CHECKED BY: BLW
DIV: 12
DATE: Feb 06, 2018

Spacing Factor is 1 unless specified otherwise

USE NOTES

1. Legend and border (except those that are colored black) shall be direct applied Grade C sheeting.
2. Background shall be Grade C reflective sheeting.

LETTER POSITIONS

Letter spacings are to start of next letter

| | | | | | | | | | | | | | | | | | | | | | | Series/Size Text Length |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | H | i | g | h | w | a | y | | P | a | t | r | o | l | | | | | | | | EM 2000 |
| 14.3 | 15.3 | 6.8 | 14.1 | 12.6 | 16.2 | 12.6 | 11.3 | 13.3 | 12.8 | 12.8 | 11.2 | 8.6 | 13.2 | 2.7 | 14.3 | | | | | | | 163.5 |
| | E | X | I | T | | 2 | 0 | 8 | | | | | | | | | | | | | | E 2000 |
| 52.2 | 8.9 | 10.7 | 3.5 | 7.5 | 15 | 14.7 | 15.1 | 12.2 | 52.2 | | | | | | | | | | | | | 87.6 |

GROUND MOUNTED TYPE 'A' & 'B' SIGNS

$$$$SYSTIME$$$$
$$$$