DocuSign Envelope ID: 2CBE69AC-BA62-466A-BFD4-8D07A1A379CD

TIP NO.	SHEET NO.
R-2707D	SIGN-4J

APPROVED: Betsy L. Watson (DocuSigned by: 35E67BB34F8743F...)

DATE: 4/27/2023

SEAL

NORTH CAROLINA PROFESSIONAL SEAL 29449 ENGINEER BETSY L. WATSON

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

Stantec

SIGN NUMBER: 201A,203
TYPE: A
QUANTITY: 2

SIGN WIDTH: 96″
HEIGHT: 60″
TOTAL AREA: 40.0 Sq.Ft.

BORDER TYPE: FLUSH
RADII: 6″
WIDTH: 1.5″
RECESS: 0″

NO. Z BARS: 2
LENGTH: 88.0

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT
AR_Type A	67	6	18.5	29.2

MAT'L: 0.125″ (3.2MM) ALUMINUM

DESIGN BY: RRH
PROJECT ID: R-2707D
CHECKED BY: BLW
DIV: 12
DATE: Feb 06, 2018

Spacing Factor is 1 unless specified otherwise

USE NOTES

1. Legend and border (except those that are colored black) shall be direct applied Grade C sheeting.
2. Background shall be Grade C reflective sheeting.
3. Shields; A, B, and C type arrows shall be on 0.032″ (0.8mm) aluminum and demountable.

LETTER POSITIONS

Letter spacings are to start of next letter

							Series/Size Text Length
	E	X	I	T			E 2000
25.8	12.8	15.8	6.8	9	25.8		44.4
	2	0	8				E 2000
8.3	17.6	18.2	14.6	37.3			50.4

SIGN NUMBER: 201B
TYPE: B
QUANTITY: 1

SIGN WIDTH: 96″
HEIGHT: 24″
TOTAL AREA: 16.0 Sq.Ft.

BORDER TYPE: RECESSED
RADII: 3″
WIDTH: 0.88″
RECESS: 0.63″

NO. Z BARS: 2
LENGTH: 88.0

BACKG COLOR: Yellow
COPY COLOR: Black

SYMBOL	X	Y	WID	HT

MAT'L: 0.125″ (3.2MM) ALUMINUM

DESIGN BY: RRH
PROJECT ID: R-2707D
CHECKED BY: BLW
DIV: 12
DATE: Feb 06, 2018

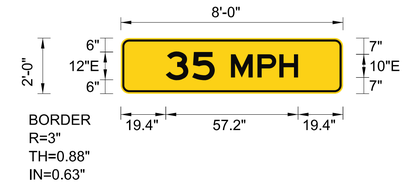

Spacing Factor is 1 unless specified otherwise

USE NOTES

1. Legend and border shall be direct applied black non-reflective sheeting.
2. Background shall be Grade C reflective sheeting.

LETTER POSITIONS

Letter spacings are to start of next letter

							Series/Size Text Length
	3	5					E 2000
19.4	11.4	9.7	55.4				21.1
	M	P	H				E 2000
47.6	11.5	9.5	8.1	19.4			29

SIGN NUMBER: 202
TYPE: A
QUANTITY: 1

SIGN WIDTH: 72″
HEIGHT: 60″
TOTAL AREA: 30.0 Sq.Ft.

BORDER TYPE: FLUSH
RADII: 6″
WIDTH: 1.5″
RECESS: 0″

NO. Z BARS: 2
LENGTH: 64.0

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT
AR_Type A	24.5	6	18.5	29.2

MAT'L: 0.125″ (3.2MM) ALUMINUM

DESIGN BY: RRH
PROJECT ID: R-2707D
CHECKED BY: BLW
DIV: 12
DATE: Apr 01, 2019

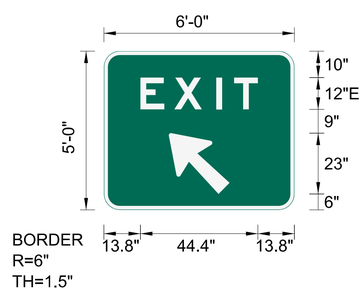

Spacing Factor is 1 unless specified otherwise

USE NOTES

1. Legend and border (except those that are colored black) shall be direct applied Grade C sheeting.
2. Background shall be Grade C reflective sheeting.
3. Shields; A, B, and C type arrows shall be on 0.032″ (0.8mm) aluminum and demountable.

LETTER POSITIONS

Letter spacings are to start of next letter

							Series/Size Text Length
	E	X	I	T			E 2000
13.8	12.8	15.8	6.8	9	13.8		44.4

SIGN NUMBER: 204
TYPE: A
QUANTITY: 1

SIGN WIDTH: 96″
HEIGHT: 60″
TOTAL AREA: 40.0 Sq.Ft.

BORDER TYPE: FLUSH
RADII: 6″
WIDTH: 1.5″
RECESS: 0″

NO. Z BARS: 2
LENGTH: 88.0

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT
AR_Type A	67	6	18.5	29.2

MAT'L: 0.125″ (3.2MM) ALUMINUM

DESIGN BY: RRH
PROJECT ID: R-2707D
CHECKED BY: BLW
DIV: 12
DATE: Mar 10, 2023

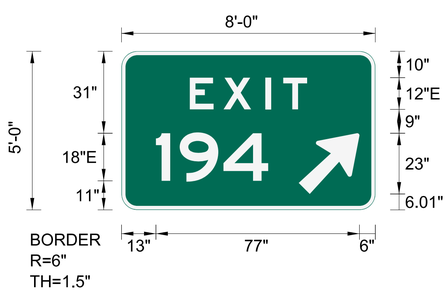

Spacing Factor is 1 unless specified otherwise

USE NOTES

1. Legend and border (except those that are colored black) shall be direct applied Grade C sheeting.
2. Background shall be Grade C reflective sheeting.
3. Shields; A, B, and C type arrows shall be on 0.032″ (0.8mm) aluminum and demountable.

LETTER POSITIONS

Letter spacings are to start of next letter

							Series/Size Text Length
	E	X	I	T			E 2000
25.8	12.8	15.8	6.8	9	25.8		44.4
	1	9	4				E 2000
13	9	16.6	16.9	40.5			42.5

$$$$SYSTIME$$$$
$$$$