DocuSign Envelope ID: 016FF520-39AE-417A-9C8F-5D1C5671A035

TIP NO.	SHEET NO.
R-2707E	SIGN-4B

APPROVED: Docusigned by: Betsy L. Watson 35E07BB34F8743F...

DATE: 4/27/2023

SEAL

NORTH CAROLINA PROFESSIONAL SEAL 29449 ENGINEER BETSY L. WATSON

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

Stantec

SIGN NUMBER: 101
TYPE: A
QUANTITY: 1

SIGN WIDTH: 192″
HEIGHT: 66″
TOTAL AREA: 88.0 Sq.Ft.

BORDER TYPE: FLUSH
RADII: 9″
WIDTH: 2″
RECESS: 0″

NO. Z BARS: 2
LENGTH: 184.0

BACKG COLOR: Blue
COPY COLOR: White

SYMBOL	X	Y	WID	HT

MAT'L: 0.125″ (3.2MM) ALUMINUM

DESIGN BY: RRH
PROJECT ID: R-2707E
CHECKED BY: BLW
DIV: 12
DATE: Feb 16, 2018

Spacing Factor is 1 unless specified otherwise

USE NOTES

1. Legend and border (except those that are colored black) shall be direct applied Grade C sheeting.
2. Background shall be Grade C reflective sheeting.

LETTER POSITIONS

Letter spacings are to start of next letter

																						Series/Size Text Length
	H	i	g	h	w	a	y		P	a	t	r	o	l								EM 2000
14.3	15.3	6.8	14.1	12.6	16.2	12.6	11.3	13.3	12.8	12.8	11.2	8.6	13.2	2.7	14.3							163.5
	E	X	I	T		2	0	8														E 2000
52.2	8.9	10.7	3.5	7.5	15	14.7	15.1	12.2	52.2													87.6

SIGN NUMBER: 102
TYPE: A
QUANTITY: 1

SIGN WIDTH: 180″
HEIGHT: 90″
TOTAL AREA: 112.5 Sq.Ft.

BORDER TYPE: FLUSH
RADII: 9″
WIDTH: 2″
RECESS: 0″

NO. Z BARS: 3
LENGTH: 172.0

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT

MAT'L: 0.125″ (3.2MM) ALUMINUM

DESIGN BY: RRH
PROJECT ID: R-2707E
CHECKED BY: BLW
DIV: 12
DATE: Feb 16, 2018

Spacing Factor is 1 unless specified otherwise

USE NOTES

1. Legend and border (except those that are colored black) shall be direct applied Grade C sheeting.
2. Background shall be Grade C reflective sheeting.

LETTER POSITIONS

Letter spacings are to start of next letter

																						Series/Size Text Length
	C	l	e	v	e	l	a	n	d													EM 2000
39.5	14.5	6.8	11.4	12.9	12.9	6.8	14.1	12.9	8.8	39.5												101.1
	C	o	m	m		C	o	l	l	e	g	e										EM 2000
15.5	13.3	13.2	20	14.6	13.3	13.3	13.2	8	6.8	11.7	12.9	8.8	15.5									149
	E	X	I	T		2	0	8														E 2000
46.2	8.9	10.7	3.5	7.5	15	14.7	15.1	12.2	46.2													87.6

SIGN NUMBER: 103
TYPE: A
QUANTITY: 1

SIGN WIDTH: 144″
HEIGHT: 78″
TOTAL AREA: 78.0 Sq.Ft.

BORDER TYPE: FLUSH
RADII: 6″
WIDTH: 0.75″
RECESS: 0″

NO. Z BARS: 2
LENGTH: 136.0

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT
M1_4	15.1	16	18	18
ARROW 1	44.2	15.1	51.9	62.5

MAT'L: 0.125″ (3.2MM) ALUMINUM

DESIGN BY: RRH
PROJECT ID: R-2707E
CHECKED BY: BLW
DIV: 12
DATE: Apr 02, 2019

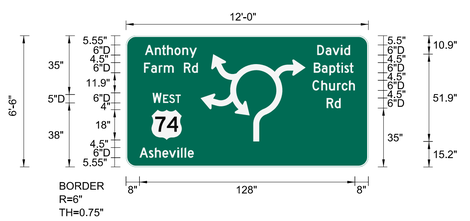

Spacing Factor is 1 unless specified otherwise

USE NOTES

1. Legend and border (except those that are colored black) shall be direct applied Grade C sheeting.
2. Background shall be Grade C reflective sheeting.
3. Shields; A, B, and C type arrows shall be on 0.032″ (0.8mm) aluminum and demountable.

LETTER POSITIONS

Letter spacings are to start of next letter

																						Series/Size Text Length
	A	n	t	h	o	n	y															D 2000
11.3	5.9	4.1	3.1	4.4	4.6	4.2	4.5	101.9														30.8
	D	a	v	i	d																	D 2000
113.6	5	4.1	5	1.9	3.6	10.9																19.6
	F	a	r	m		R	d															D 2000
10.7	4.2	4.6	3	5.9	6	4.7	3.6	101.3														32
	B	a	p	t	i	s	t															D 2000
111.6	4.7	4.6	4	3.1	1.8	3.1	2.4	8.9														23.6
	C	h	u	r	c	h																D 2000
110.7	5.3	4.6	4.7	2.8	4.3	3.5	8															25.3
	W		E	S	T																	D 2000
15.8	5.3	0.9	3.6	3.8	3.1	111.5																16.7
	R	d																				D 2000
119.2	4.7	3.6	16.5																			8.3
	A	s	h	e	v	i	l	l	e													D 2000
8	5.5	3.6	4.4	3.9	5	2.2	2.2	1.9	3.5	103.8												32.2

SIGN NUMBER: 104
TYPE: A
QUANTITY: 1

SIGN WIDTH: 150″
HEIGHT: 78″
TOTAL AREA: 81.3 Sq.Ft.

BORDER TYPE: FLUSH
RADII: 6″
WIDTH: 0.75″
RECESS: 0″

NO. Z BARS: 2
LENGTH: 142.0

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT
M1_4	18	16	18	18
ARROW 1	45.8	15.1	51.9	62.5

MAT'L: 0.125″ (3.2MM) ALUMINUM

DESIGN BY: RRH
PROJECT ID: R-2707E
CHECKED BY: BLW
DIV: 12
DATE: Apr 03, 2019

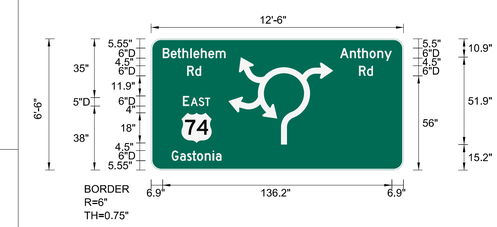

Spacing Factor is 1 unless specified otherwise

USE NOTES

1. Legend and border (except those that are colored black) shall be direct applied Grade C sheeting.
2. Background shall be Grade C reflective sheeting.
3. Shields; A, B, and C type arrows shall be on 0.032″ (0.8mm) aluminum and demountable.

LETTER POSITIONS

Letter spacings are to start of next letter

																						Series/Size Text Length
	B	e	t	h	l	e	h	e	m													D 2000
6.9	4.7	3.8	3.1	4.7	1.9	4.4	4.4	4.4	5.9	105.7												37.4
	A	n	t	h	o	n	y															D 2000
112.3	5.9	4.1	3.1	4.4	4.6	4.2	4.5	6.9														30.8
	R	d																				D 2000
21.4	4.7	3.6	120.3																			8.3
	R	d																				D 2000
123.5	4.7	3.6	18.1																			8.3
	E		A	S	T																	D 2000
18.9	3.7	0.9	4.7	3.8	3.1	114.9																16.2
	G	a	s	t	o	n	i	a														D 2000
12.2	5	4.2	3.1	2.8	4.6	4.7	1.9	3.4	108.2													29.6

GROUND MOUNTED TYPE 'A' & 'B' SIGNS

$$$$SYSTIME$$$$
$$$$DGN$$$$
$$$$USERNAME$$$$