DocuSign Envelope ID: 016FF520-39AE-417A-9C6F-5D1C5671A035

SIGN NUMBER: 119B
TYPE: A
QUANTITY: 1

SIGN WIDTH: 216″
HEIGHT: 132″
TOTAL AREA: 198.0 Sq.Ft.

BORDER TYPE: FLUSH
RADII: 12″
WIDTH: 2″
RECESS: 0″

NO. Z BARS: 3
LENGTH: 208.0

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT
M1_4	90	63.4	36	36

MAT'L: 0.125″ (3.2MM) ALUMINUM

DESIGN BY: RRH
PROJECT ID: R-2707E
CHECKED BY: BLW
DIV: 12
DATE: Apr 18, 2023

Stony Point Rd has a Spacing Factor is 0.75
Spacing Factor is 1 unless specified otherwise

USE NOTES

1. Legend and border (except those that are colored black) shall be direct applied Grade C sheeting.
2. Background shall be Grade C reflective sheeting.
3. Shields; A, B, and C type arrows shall be on 0.032″ (0.8mm) aluminum and demountable.

LETTER POSITIONS

Letter spacings are to start of next letter

																					Series/Size Text Length
	B	U	S	I	N	E	S	S													E 2000
64.9	12.1	12.1	12.1	5.3	12.8	10.7	11.4	9.7	64.9												86.3
	S	t	o	n	y		P	o	i	n	t		R	d							EM 2000
14.8	15.5	11.1	14.6	14	13.6	16	14.8	14.6	8	14.2	8.3	16	15.1	10.6	14.8						186.3
	1		M	I	L	E															E 2000
81.7	4.5	15	12	4.4	9.2	7.5	81.7														52.6

SIGN NUMBER: 120
TYPE: A
QUANTITY: 1

SIGN WIDTH: 138″
HEIGHT: 66″
TOTAL AREA: 63.3 Sq.Ft.

BORDER TYPE: FLUSH
RADII: 9″
WIDTH: 2″
RECESS: 0″

NO. Z BARS: 2
LENGTH: 130.0

BACKG COLOR: Brown
COPY COLOR: White

SYMBOL	X	Y	WID	HT

MAT'L: 0.125″ (3.2MM) ALUMINUM

DESIGN BY: RRH
PROJECT ID: R-2707E
CHECKED BY: BLW
DIV: 12
DATE: Apr 17, 2023

Spacing Factor is 1 unless specified otherwise

USE NOTES

1. Legend and border (except those that are colored black) shall be direct applied Grade C sheeting.
2. Background shall be Grade C reflective sheeting.

LETTER POSITIONS

Letter spacings are to start of next letter

																					Series/Size Text Length
	M	o	s	s		L	a	k	e												EM 2000
15.5	15.7	11.7	11.4	8.8	13.3	11.6	14.1	11.7	8.8	15.5											107.1
	E	X	I	T		2	1	1													E 2000
32.6	8.9	10.7	3.5	7.5	15	14.7	7.9	4.5	32.6												72.8

SIGN NUMBER: 121B
TYPE: A
QUANTITY: 1

SIGN WIDTH: 216″
HEIGHT: 132″
TOTAL AREA: 198.0 Sq.Ft.

BORDER TYPE: FLUSH
RADII: 12″
WIDTH: 2″
RECESS: 0″

NO. Z BARS: 3
LENGTH: 208.0

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT
M1_4	90	63.4	36	36

MAT'L: 0.125″ (3.2MM) ALUMINUM

DESIGN BY: RRH
PROJECT ID: R-2707E
CHECKED BY: BLW
DIV: 12
DATE: Apr 18, 2023

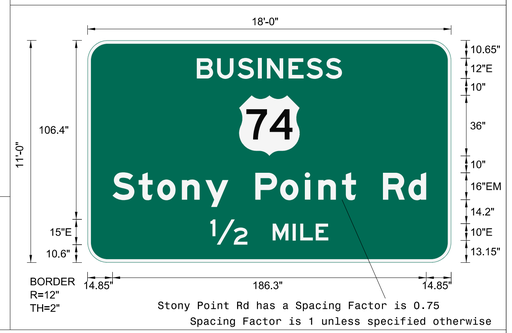

Stony Point Rd has a Spacing Factor is 0.75
Spacing Factor is 1 unless specified otherwise

USE NOTES

1. Legend and border (except those that are colored black) shall be direct applied Grade C sheeting.
2. Background shall be Grade C reflective sheeting.
3. Shields; A, B, and C type arrows shall be on 0.032″ (0.8mm) aluminum and demountable.

LETTER POSITIONS

Letter spacings are to start of next letter

																					Series/Size Text Length
	B	U	S	I	N	E	S	S													E 2000
64.9	12.1	12.1	12.1	5.3	12.8	10.7	11.4	9.7	64.9												86.3
	S	t	o	n	y		P	o	i	n	t		R	d							EM 2000
14.8	15.5	11.1	14.6	14	13.6	16	14.8	14.6	8	14.2	8.3	16	15.1	10.6	14.8						186.3
	1/2		M	I	L	E															E 2000
73	22	15	12	4.4	9.2	7.5	73														70.1

TIP NO.	SHEET NO.
R-2707E	SIGN-4G

APPROVED: Docusigned by: Betsy L. Watson 35E67BB34F8743F...
DATE: 4/27/2023
SEAL

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

Stantec

GROUND MOUNTED TYPE 'A' & 'B' SIGNS

$$$$$SYSTIME$$$$
$$$$$