
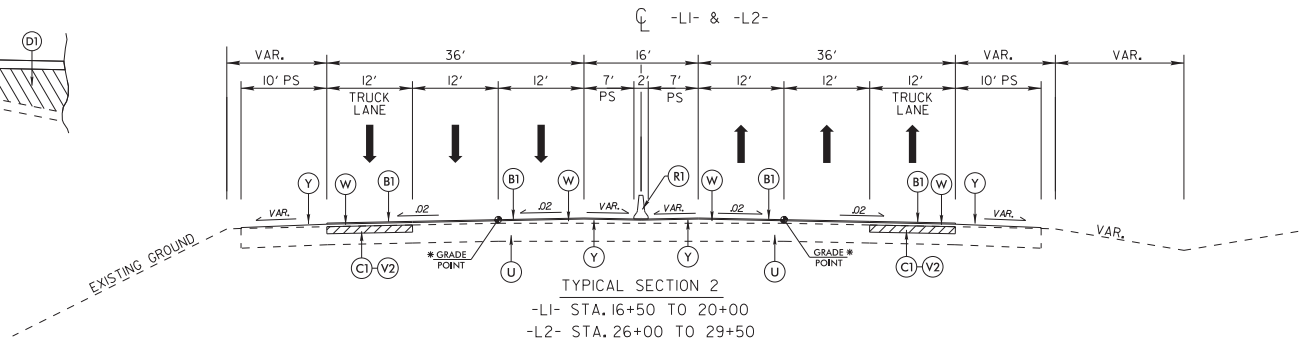
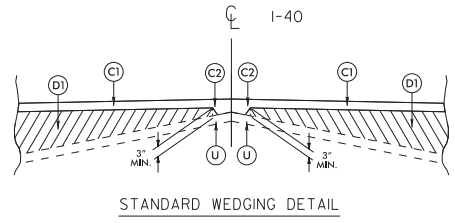


6/2/04

PAVEMENT SCHEDULE	
B1	PROP. APPROX. 5/8" ULTRATHIN BONDED WEARING COURSE (UBWC), AT AN AVERAGE RATE OF 70 LBS. PER SQ. YD.
C1	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.
C2	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 1 1/2" OR GREATER THAN 2" IN DEPTH
D1	PROP. VAR. DEPTH ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 2 1/2" OR GREATER THAN 4" IN DEPTH.
R1	CONCRETE MEDIAN BARRIER
U	EXISTING PAVEMENT
V2	3" MILLING
W	VARIABLE DEPTH ASPHALT PAVEMENT
Y	RUMBLE STRIPS

PROJECT REFERENCE NO. HI-0010	SHEET NO. 2A-1
----------------------------------	-------------------

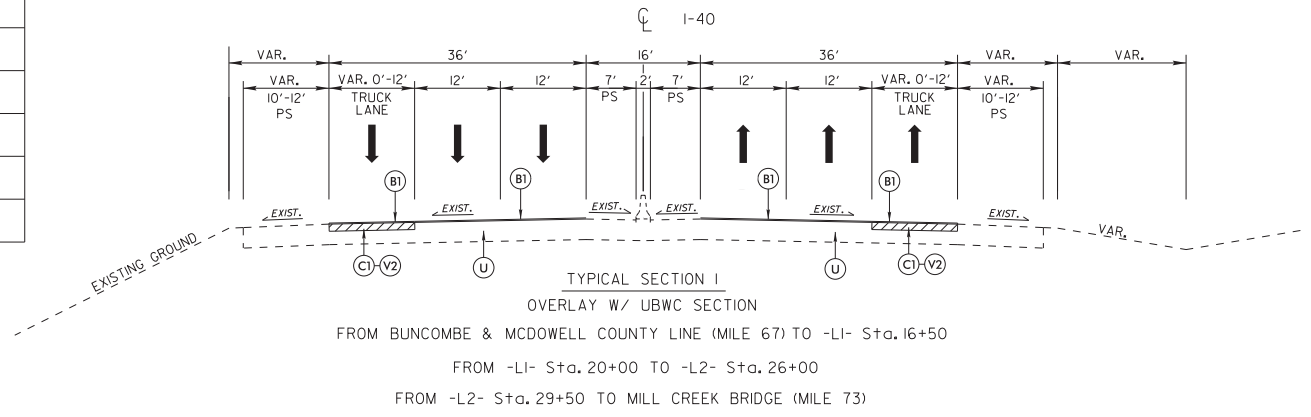

\* NOTE: GRADE POINT ELEVATIONS PROVIDED ON CROSS SECTIONS

Remove existing portable concrete median barrier and replaced with 42" single slope concrete barrier as shown on detail sheet 2C-1 at the follow locations:  
Mile Post 66.88 to 68.88, Mile Post 69.33 to 70.99 and Mile Post 71.21 to 71.72

Remove existing single slope concrete barrier and replace with 60" single slope concrete barrier as shown on detail sheet 2C-6 at the following location:  
Pipe crossing between drainage structure 801 and 802 at Mile Post 68.90