6/5/99	PAVEMENT SCHEDULE (FINAL PAVEMENT DESIGN)			
	C1	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.	R1	2'-6" CONCRETE CURB AND GUTTER.
s\60609754-U-5748 Ligon Mill\900-CAD GIS\910_CAD\70_NCDOT_TIP\Roadway\Proj\U5748_rdy_typ.dgn	C2	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.	R2	2'-9" CONCRETE CURB AND GUTTER.
	С3	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT TO EXCEED 1½" IN DEPTH.	R3	4" CONCRETE ISLAND COVER
	C4	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.	R4	5" MONOLITHIC ISLAND (KEYED IN)
	C5	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.	R5	8"x18" CONCRETE CURB
	C6	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT TO EXCEED 2" IN DEPTH.	R6	SINGLE FACED BARRIER
	C7	PROP. APPROX. 2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.	S	CONCRETE SIDEWALK
	C8	PROP. APPROX. 2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.	Т	EARTH MATERIAL
	D1	PROP. APPROX. 2½" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.	U	EXISTING PAVEMENT
	D2	PROP. APPROX. 4" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.	V1	1½" DEPTH MILLING
	D3	PROP. VAR. DEPTH ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 2½" IN DEPTH OR GREATER THAN 4" IN DEPTH.	V2	VARIABLE DEPTH MILLING O" TO 1½"
	E1	PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.	V3	3" DEPTH MILLING
	E2	PROP. APPROX. 3" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 342 LBS. PER SQ. YD.	W1	VARIABLE DEPTH ASPHALT PAVEMENT (SEE DETAIL SHOWING METHOD OF WEDGING NO. 1)
	E3	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 4" IN DEPTH OR GREATER THAN $5\frac{1}{2}$ " IN DEPTH.	W2	VARIABLE DEPTH ASPHALT PAVEMENT (SEE DETAIL SHOWING METHOD OF WEDGING NO. 2)
	J1	PROP. 6" AGGREGATE BASE COURSE.	W3	VARIABLE DEPTH ASPHALT PAVEMENT (SEE DETAIL SHOWING METHOD OF WEDGING NO. 3)
	J2	PROP. 8" AGGREGATE BASE COURSE.		Q -L- & -SBX- GRADE POINT
	К	PROP. 8" CLASS IV SUBGRADE STABILIZATION		E3 C4 D2 D3 C6 D3
	N1	GEOTEXTILE FOR SOIL STABILIZATION		$\begin{array}{c ccccccccccccccccccccccccccccccccccc$

GEOTEXTILE FOR SUBGRADE STABILIZATION


PRIME COAT AT THE RATE OF .35 GAL. PER SQ. YARD

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE

D2 C4 E3 4" MIN.


W1: Detail Showing Method of Wedging

USE THIS DETAIL IN CONJUNCTION WITH TYPICAL SECTIONS NO. 3, 4, 5 & 6

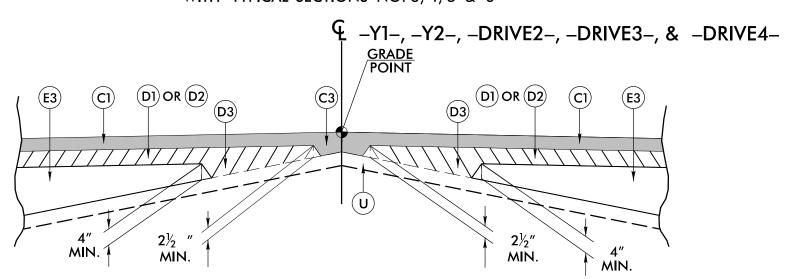


W2: Detail Showing Method of Wedging

USE THIS DETAIL IN CONJUNCTION WITH TYPICAL SECTIONS NO. 8, 11, 13, 14, & 15

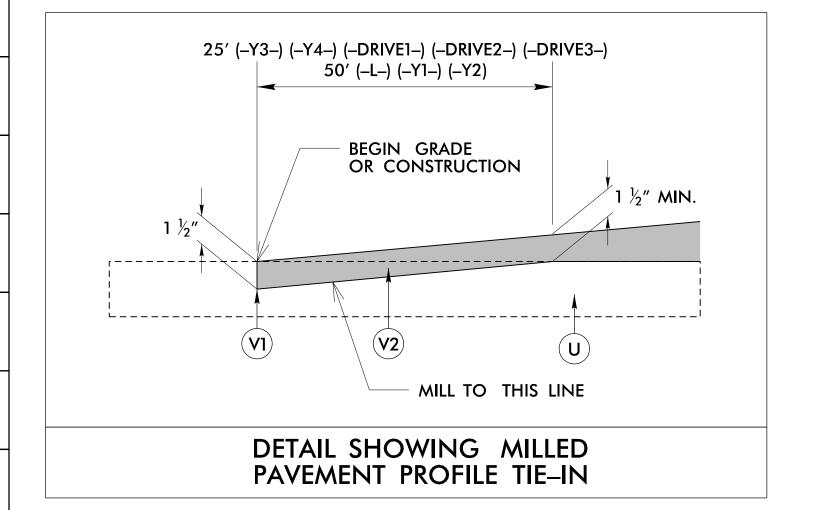


-L1- STA 19+00.00 LT TO -L1- STA 19+50.00 LT -L1- STA 19+00.00 RT TO -L1- STA 19+50.00 RT -L- STA 84+67.14 LT TO -L- STA 85+17.14 LT -L- STA 84+67.14 RT TO -L- STA 85+17.14 RT -Y1- STA 18+64.23 TO -Y1- STA 19+14.23 -Y2- STA 12+00.00 TO -Y2- STA 12+50.00-Y3- STA 11+00.00 TO -Y3- STA 11+25.00 -Y4- STA 10+50.00 TO -Y4- STA 10+75.00 -DRIVE1- STA 11+50.00 TO -DRIVE1- STA 11+75.00 -DRIVE2- STA 11+15.00 TO -DRIVE2- STA 11+40.00 -DRIVE3- STA 11+55.00 TO -DRIVE3- STA 11+80.00

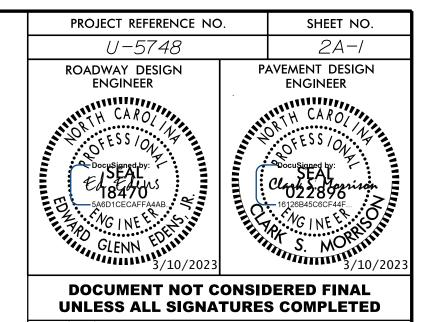

(-L1-) (-Y6-) (-Y7-)* (-Y8-) BEGIN MILL AND RESURFACE <u>/</u>1 ½″** 1 ½"** r-----(V1) OR (V3)* USE V3 FOR -Y7- ALIGNMENT - MILL TO THIS LINE ** 3" FOR -Y7- ALIGNMENT MILLING DETAIL

-L1- STA 19+50.00 RT/LT TO -L1- STA 73+73.50 RT/LT -Y6- STA 14+20.00 RT/LT TO -L- STA 20+69.00 RT/LT -Y7- STA 10+61.00 RT/LT TO -L- STA 14+10.00 RT/LT -Y8- STA 10+59.00 RT/LT TO -L- STA 11+08.00 RT/LT

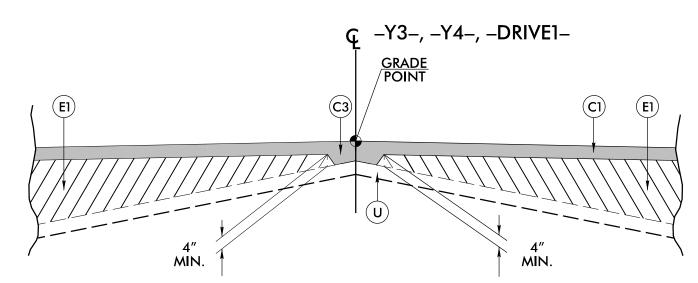

W3: Detail Showing Method of Wedging

USE THIS DETAIL IN CONJUNCTION WITH TYPICAL SECTION NO. 12