



BILL OF MATERIAL													
	REMOVAL OF EXISTING STRUCTURE	PILE EXCAVATION IN SOIL	PILE EXCAVATION NOT IN SOIL	PDA TESTING	REINFORCED CONCRETE DECK SLAB (SAND LIGHTWEIGHT CONCRETE)	GROOVING BRIDGE FLOORS	CLASS A CONCRETE	BRIDGE APPROACH SLABS	REINFORCING STEEL	MODIFIED 72" PRESTRESSED CONCRETE GIRDERS	HP 12 X 53 STEEL PILES		
	LUMP SUM	LIN. FT.	LIN. FT.	EACH	SQ. FT.	SO. FT.	SO. FT.	LUMP SUM	LBS.	NO.	LIN. FT.	NO.	LIN. FT.
SUPERSTRUCTURE					16,350	21,197		LUMP SUM		14	1840.71		
END BENT 1		112	18				99.5		12,232			25	750
END BENT 2		35	20				99.5		12,241			25	710
TOTAL	LUMP SUM	147	38	1	16,350	21,197	199	LUMP SUM	24,473	14	1840.71	50	1460

BILL OF MATERIAL											
	STEEL PILE POINTS	1'-4" X 3'-6" CONCRETE PARAPET	DECORATIVE CONCRETE PARAPET	4" SLOPE PROTECTION	ELASTOMERIC BEARINGS	EXPANSION JOINT SEALS	APPLICATION OF BRIDGE COATING	ASBESTOS ASSESSMENT	ARCHITECTURAL METAL FASCIA	CONCRETE PARAPET WITH MOMENT SLAB	PRECAST CONCRETE PANELS
	EA.	LIN. FT.	LIN. FT.	SO. YDS.	LUMP SUM	LUMP SUM	LUMP SUM	LUMP SUM	LIN. FT.	LIN. FT.	SO. FT.
SUPERSTRUCTURE		182.71	265.42		LUMP SUM	LUMP SUM	LUMP SUM	LUMP SUM	240	198.83	163
END BENT 1	25			40							
END BENT 2	25			40							
TOTAL	50	182.71	265.42	80	LUMP SUM	LUMP SUM	LUMP SUM	LUMP SUM	240	198.83	163

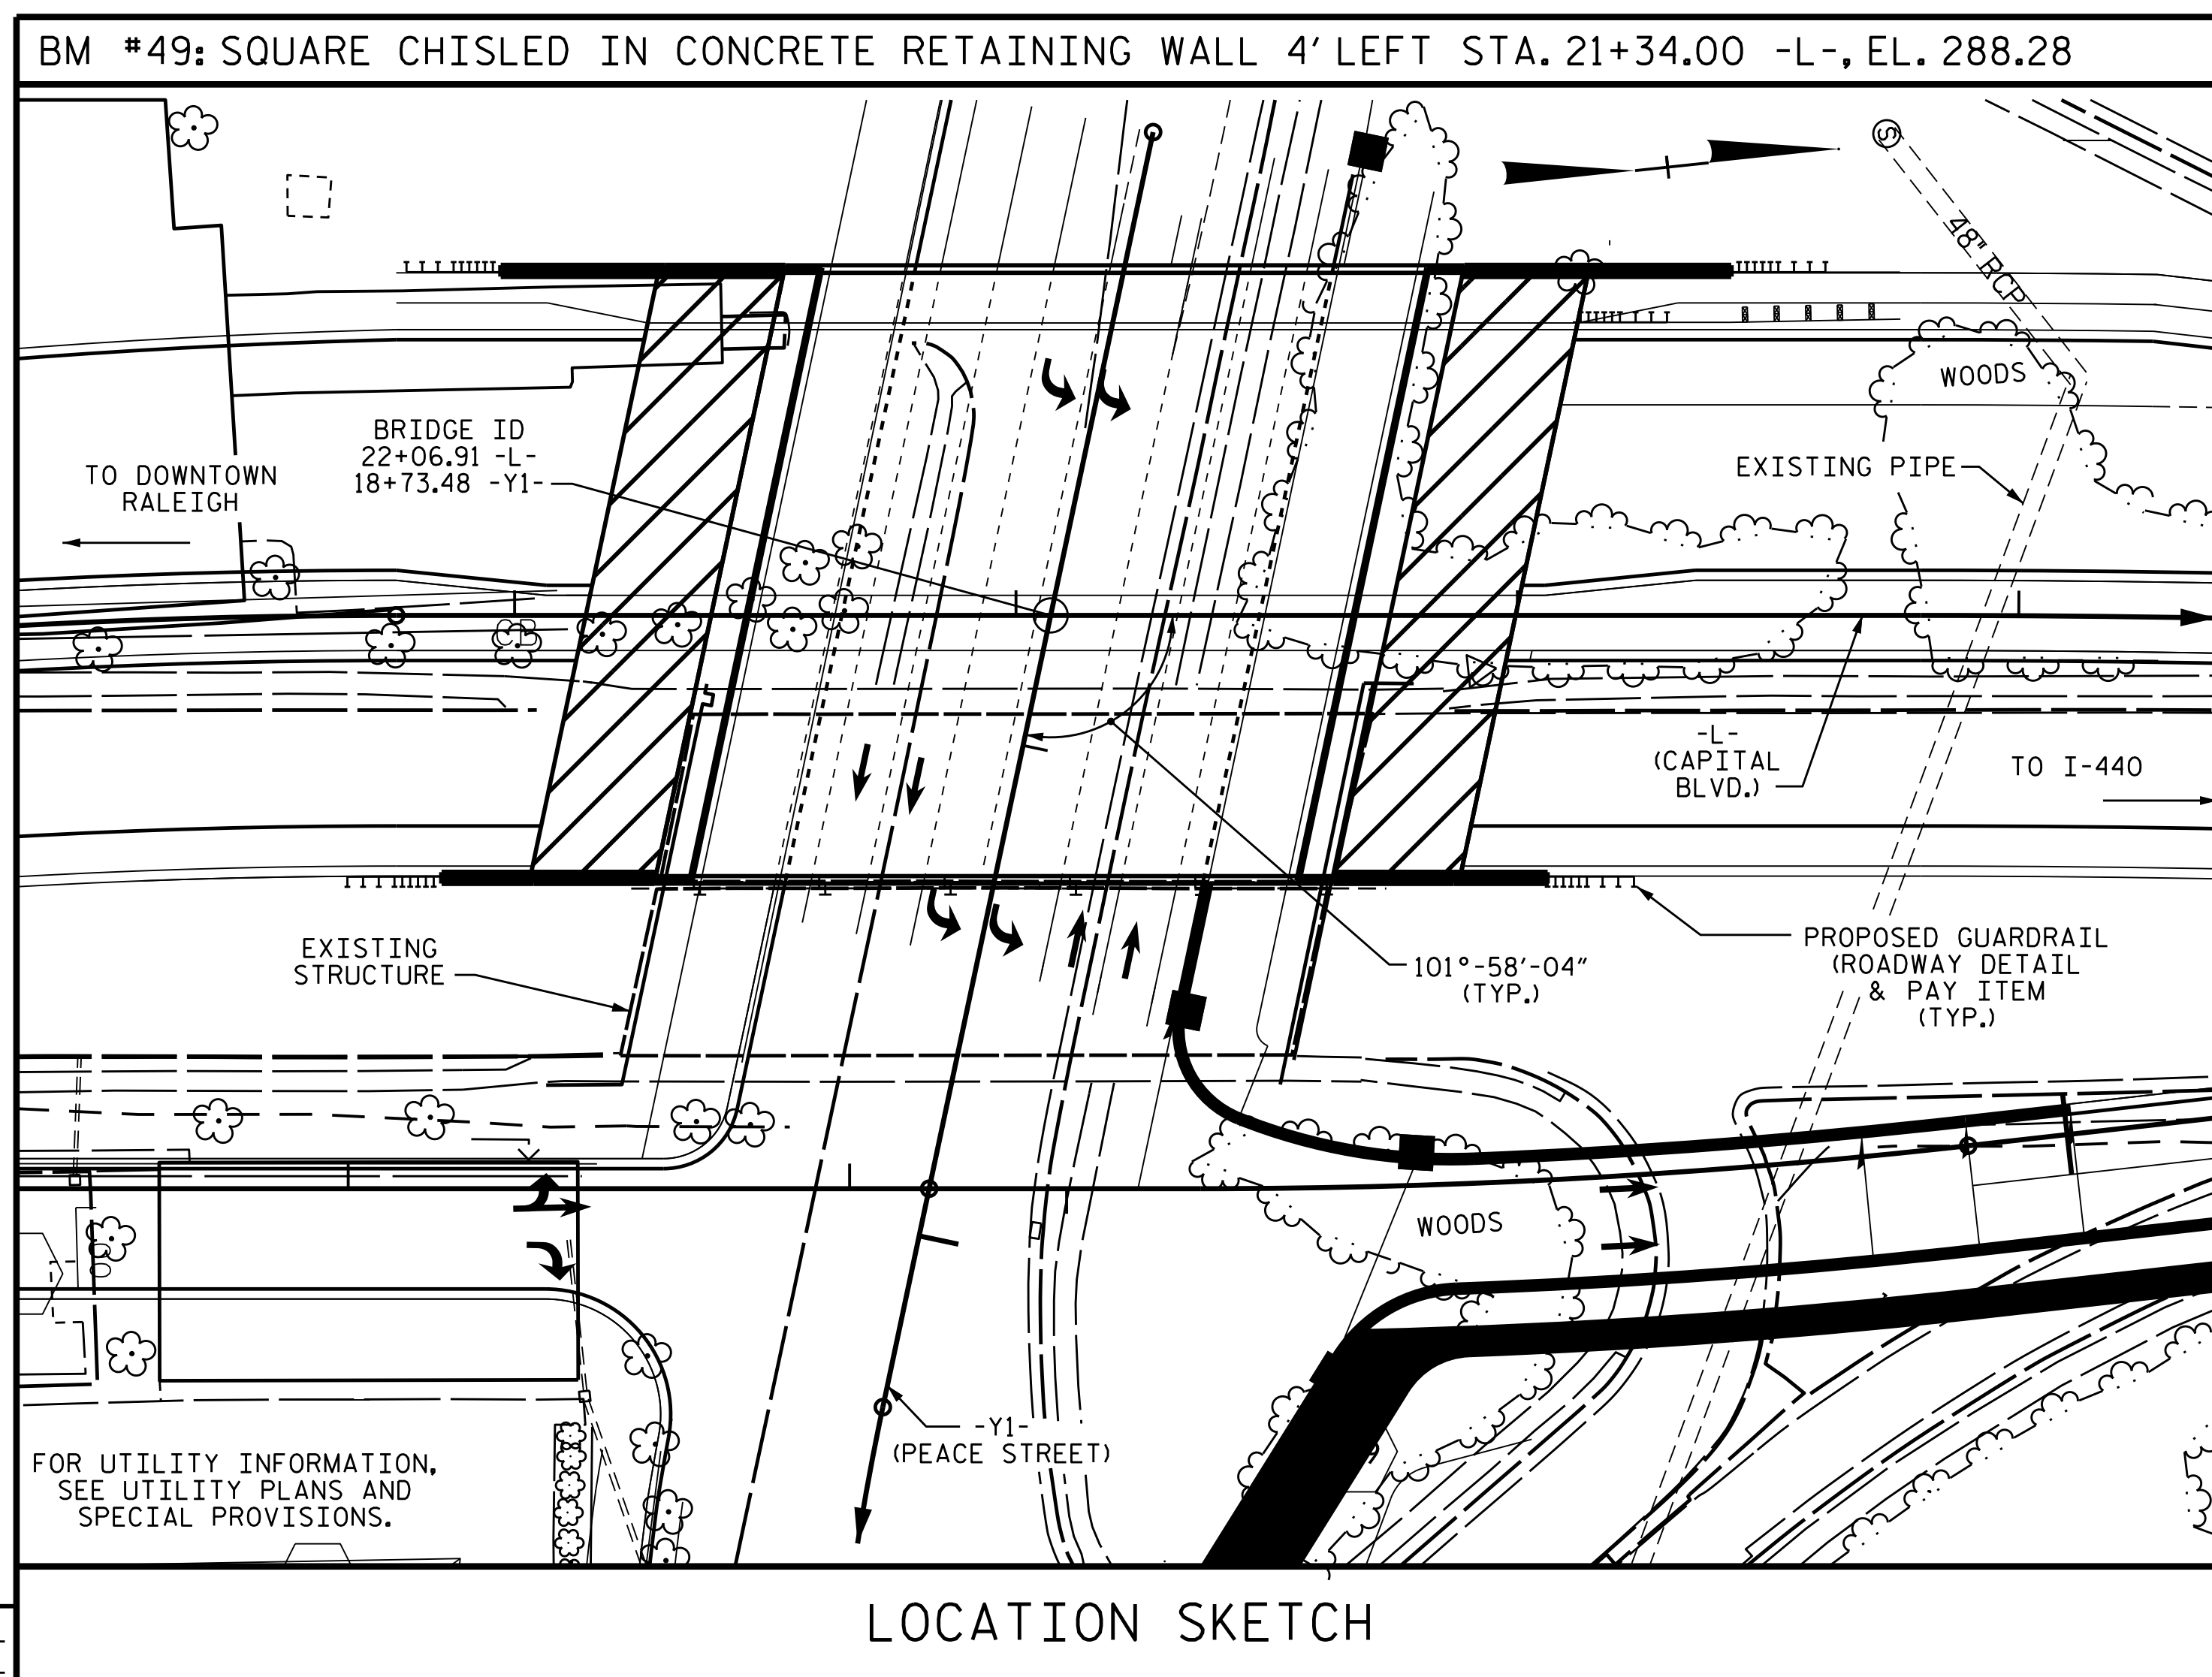

PROJECT NO. B-5121/B-5317
 WAKE COUNTY
 STATION: 22+06.91 -L-
 SHEET 3 OF 3

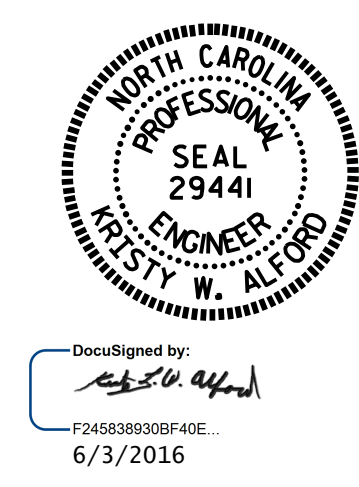

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH

GENERAL DRAWING
 FOR BRIDGE ON
 US 70/US 401/NC 50
 (CAPITAL BLVD.)
 OVER PEACE STREET

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S-3
1			3			TOTAL SHEETS 110
2			4			

DRAWN BY : K.W. ALFORD DATE : 2/2016
 CHECKED BY : J.P. ADAMS DATE : 2/2016

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED