


18 CHANNEL CONFLICT MONITOR PROGRAMMING DETAIL

(remove jumpers and set switches as shown)

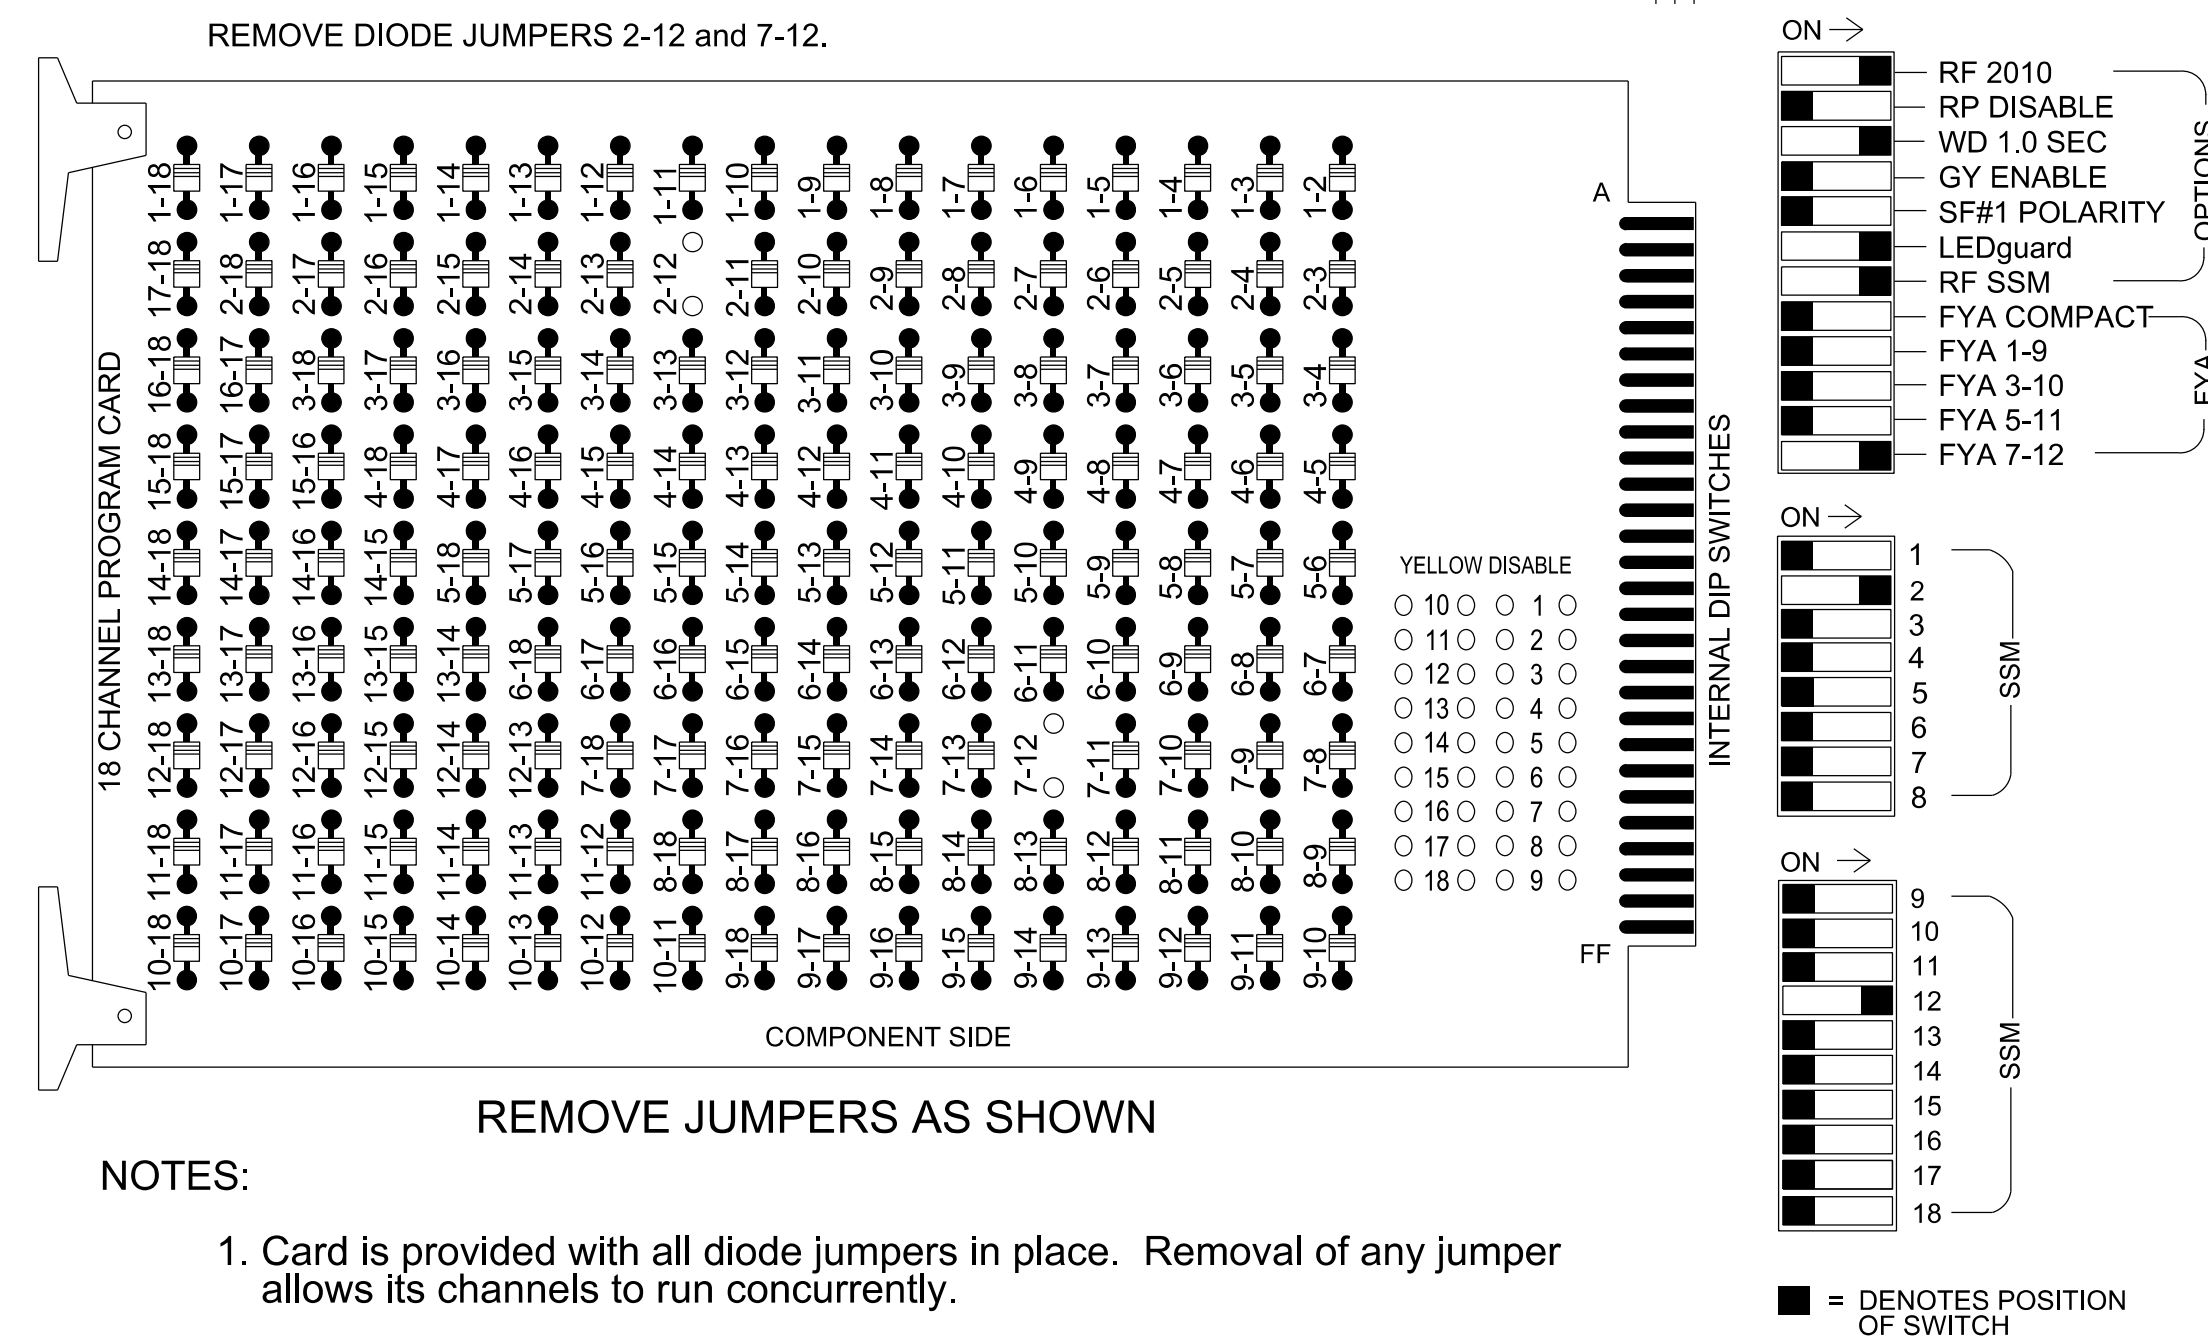

NOTES:

1. Card is provided with all diode jumpers in place. Removal of any jumper allows its channels to run concurrently.
2. Ensure jumpers SEL2-SEL5 and SEL9 are present on the monitor board.
3. Ensure that the Red Enable is active at all times during normal operation.
4. Connect serial cable from conflict monitor to comm. port 1 of 2070 controller. Ensure conflict monitor communicates with 2070.

NOTES

1. To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the signal plan.
2. Program controller to start up in phase 2 Green No Walk.
3. If this signal will be managed by an ATMS software, enable controller and detector logging for all detectors used at this location.

EQUIPMENT INFORMATION

Controller.....2070LX
 Cabinet.....332 w/ Aux
 Software.....Q-Free MAXTIME
 Cabinet Mount.....Base
 Output File Positions.....18 With Aux. Output File
 Load Switches Used.....S2, S10, AUX S5
 Phases Used.....2,7
 Overlap "1".....NOT USED
 Overlap "2".....NOT USED
 Overlap "3".....NOT USED
 Overlap "4".....*

*See overlap programming detail on sheet 2.

SIGNAL HEAD HOOK-UP CHART


LOAD SWITCH NO.	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12	AUX S1	AUX S2	AUX S3	AUX S4	AUX S5	AUX S6
CMU CHANNEL NO.	1	2	13	3	4	14	5	6	15	7	8	16	9	10	17	11	12	18
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED	OL1	OL2	SPARE	OL3	OL4	SPARE
SIGNAL HEAD NO.	NU	21,22	NU	NU	NU	NU	NU	NU	NU	71,72	*	NU	NU	NU	NU	NU	71,72	NU
RED		128																
YELLOW		129									*							
GREEN		130																
RED ARROW																		A101
YELLOW ARROW																		A102
FLASHING YELLOW ARROW																		A103
GREEN ARROW										124								

NU = Not Used

* Denotes install load resistor. See load resistor installation detail this sheet.
 * See pictorial of head wiring in detail this sheet.


FYA SIGNAL WIRING DETAIL

(wire signal heads as shown)

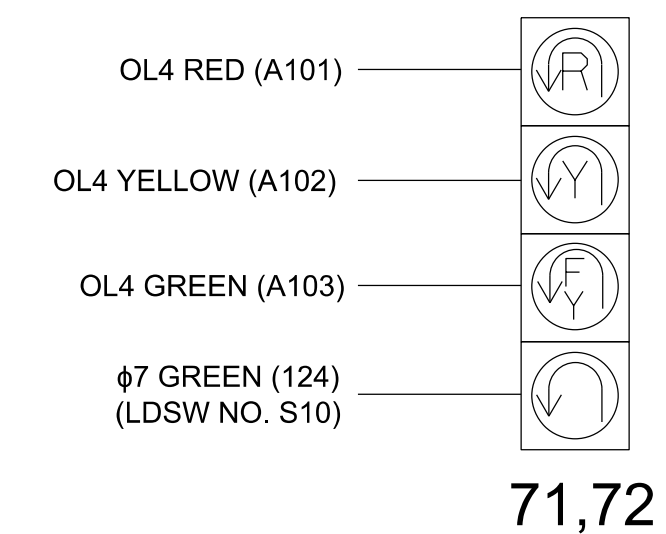

INPUT FILE POSITION LAYOUT

(front view)

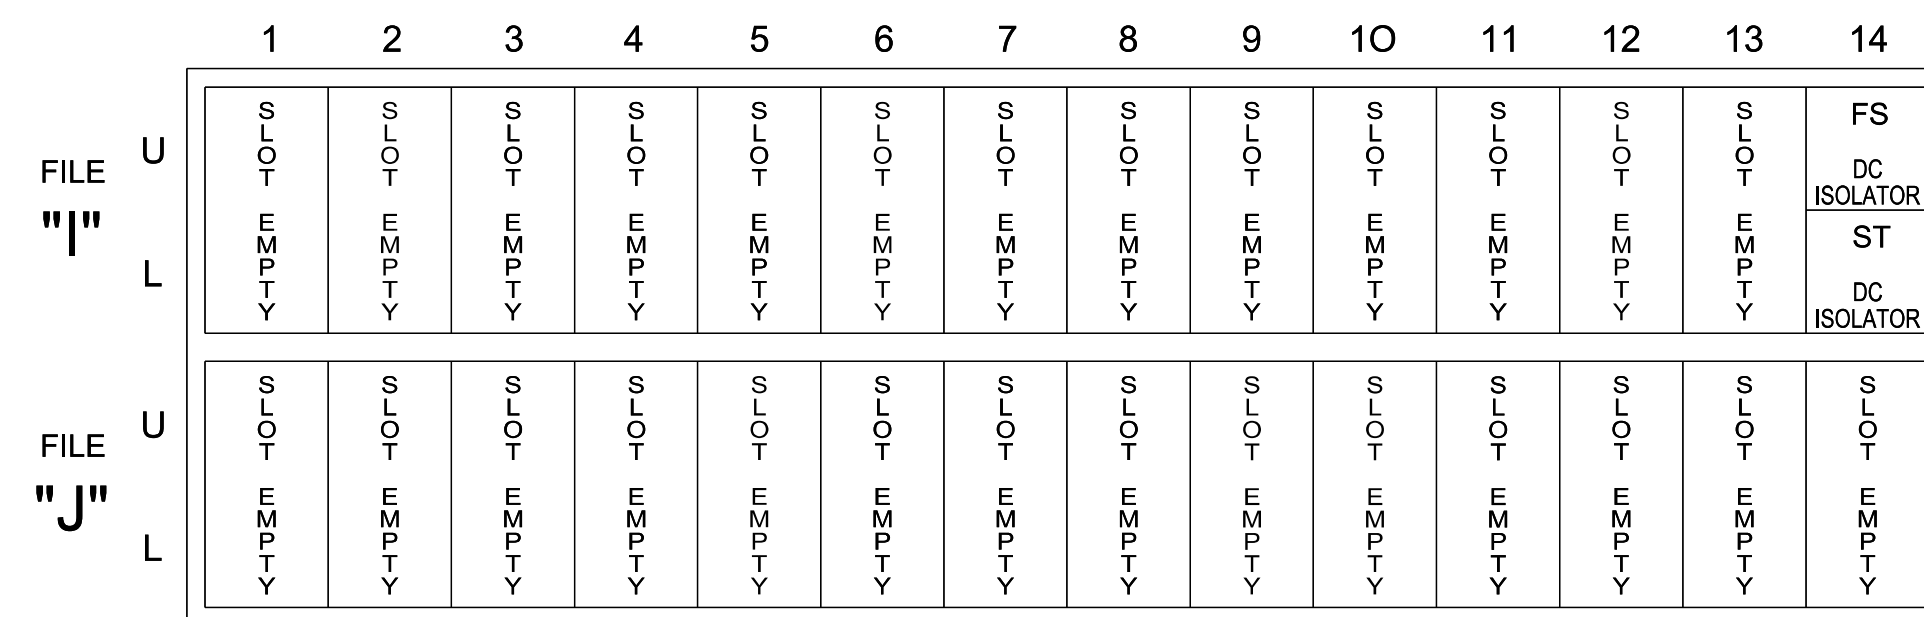


EX.: 1A, 2A, ETC. = LOOP NO.'S

FS = FLASH SENSE
 ST = STOP TIME

LOAD RESISTOR INSTALLATION DETAIL

(install resistors as shown)

ACCEPTABLE VALUES	
Value (ohms)	Wattage
1.5K - 1.9K	25W (min)
2.0K - 3.0K	10W (min)

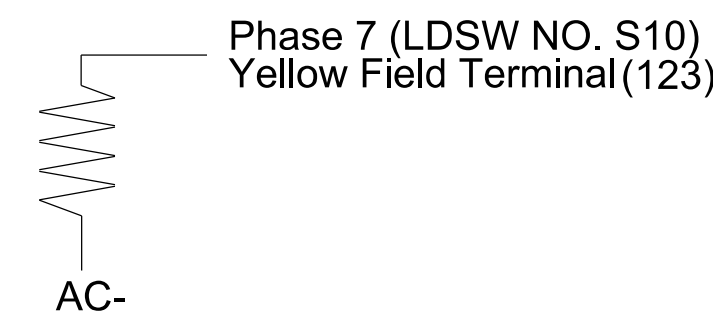

MAXTIME OVERLAP PROGRAMMING DETAIL

Front Panel
 Main Menu >Controller >Overlap >Overlap Parameters/Overlap Timings

Web Interface
 Home >Controller >Overlap Configuration >Overlaps

Overlap Plan 1

Overlap	4
Type	FYA 4 - Section
Included Phases	2
Modifier Phases	7
Trail Green	0
Trail Yellow	0.0
Trail Red	0.0

SPECIAL DETECTOR NOTE

Install a video detection system for vehicle detection. Perform installation according to manufacturer's directions and NCDOT engineer-approved mounting locations to accomplish the detection schemes shown on the Signal Design Plans.

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 11-1461T1
 DESIGNED: May 2023
 SEALED: 5/24/2023
 REVISED: N/A

Temporary Installation - Electrical Detail 1 of 1 (Phase 11)

	US 421 - NC 16 at Addison Avenue/ Big Lots Entrance East U-Turn		
	Division 11 Wilkes County Wilkesboro	SEAL NORTH CAROLINA PROFESSIONAL ENGINEER MATTHEW L. STYGLES 046057	
PLAN DATE: May 2023 PREPARED BY: M.L. Stygles	REVIEWED BY: J. Ma REVIEWED BY: S.R. Chiluka	REVISIONS INIT. DATE	DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED 5/24/2023 DATE SIG. INVENTORY NO. 11-1461T1

5/23/2019 3:15:01 PM
 R:\Traffic\c451\Signal\Drawings\Signal Design\U-5312-11-XXXXT1-Ph 11_Sig_Elec_Addition Ave East U Turn.dgn
 schiluka