



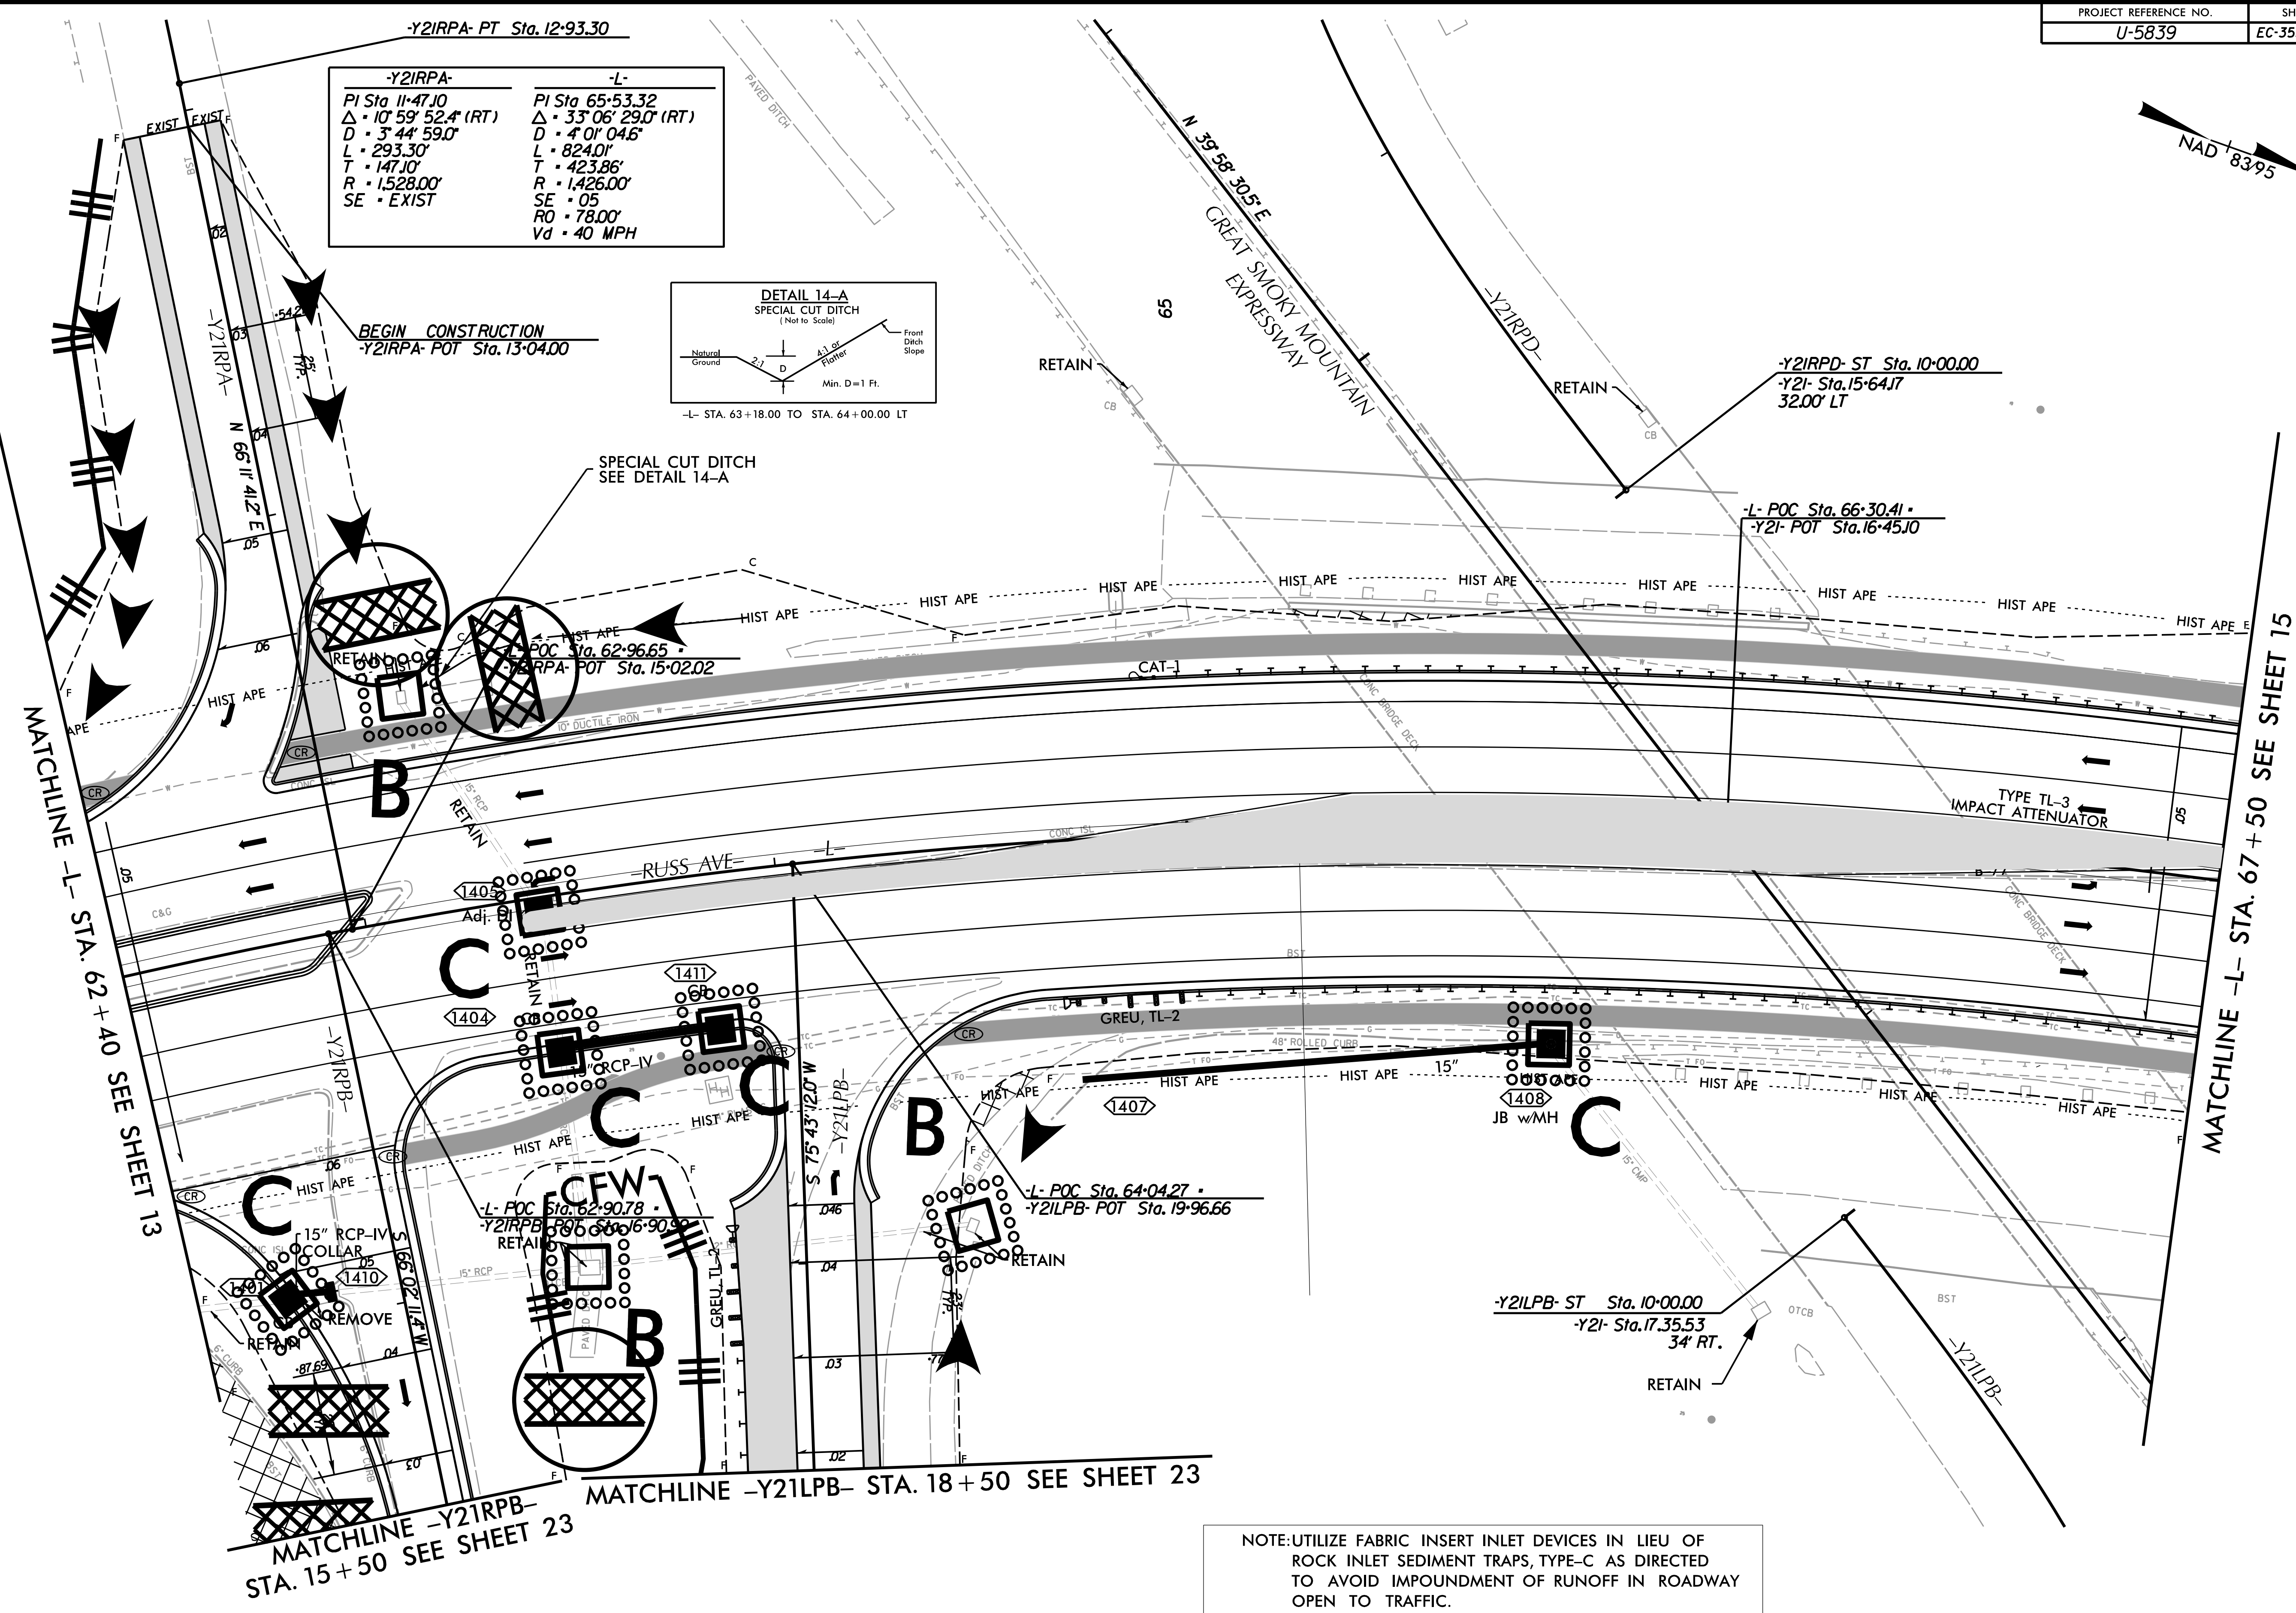

-Y2IRPA-	-L-
PI Sta 11+47.10	PI Sta 65+53.32
$\Delta = 10^{\circ} 59' 52.4" (RT)$	$\Delta = 33^{\circ} 06' 29.0" (RT)$
D = 3' 44' 59.0"	D = 4' 01' 04.6"
L = 293.30'	L = 824.01'
T = 147.10'	T = 423.86'
R = 1,528.00'	R = 1,426.00'
SE = EXIST	SE = 05
	RO = 78.00'
	Vd = 40 MPH

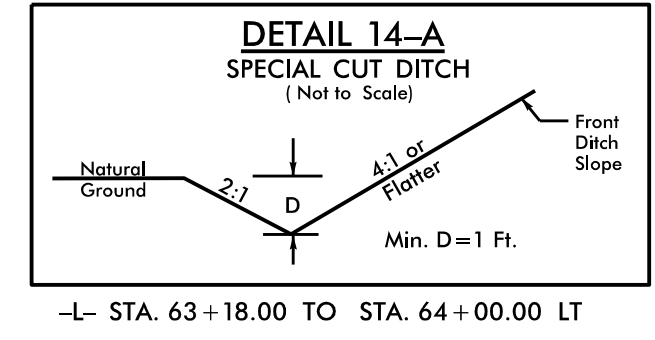

FOR -L- PROFILE SEE SHT. 26-27
 FOR -Y2IRPA- PROFILE SEE SHT. 30
 FOR -Y2IRPB- PROFILE SEE SHT. 30
 FOR -Y2ILPB- PROFILE SEE SHT. 31

NOTE: UTILIZE FABRIC INSERT INLET DEVICES IN LIEU OF ROCK INLET SEDIMENT TRAPS, TYPE-C AS DIRECTED TO AVOID IMPOUNDMENT OF RUNOFF IN ROADWAY OPEN TO TRAFFIC.

8/17/99 2706.87
 3/10/2023 R:\Environmental\Design\U5839_EC_35\F.inol.dgn