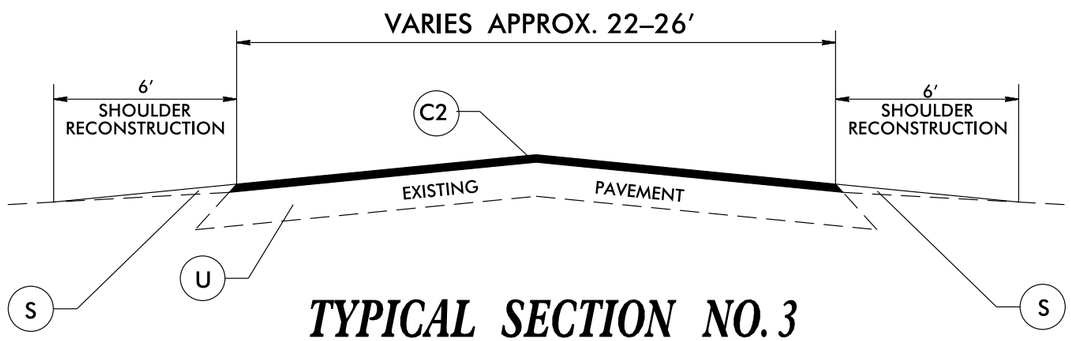

TYPICAL SECTION NO. 3

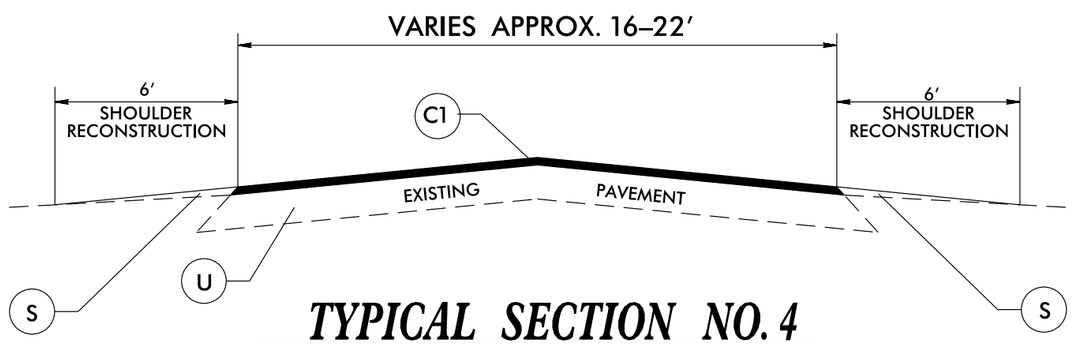

TYPICAL SECTION NO. 4

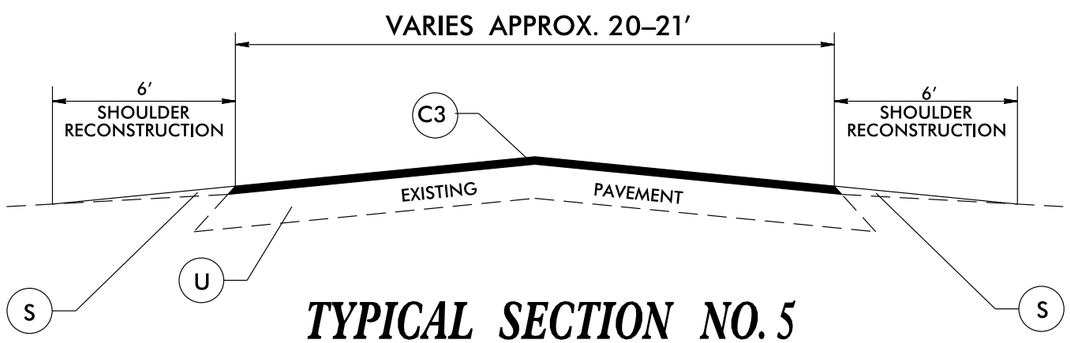

TYPICAL SECTION NO. 5

PAVEMENT SCHEDULE

C1	PROP. APPROX. 1.25″ ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 137.5 LBS. PER SQ. YD.
C2	PROP. APPROX. 1.5″ ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.
C3	PROP. APPROX. 2.0″ ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 220 LBS. PER SQ. YD.
C4	PROP. APPROX. 2.0″ ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.
F	PROPOSED ASPHALT SURFACE TREATMENT, MAT COAT WITH #67 STONE
M	MILLED RUMBLE STRIPS
S	AGGREGATE SHOULDER BORROW
T	EARTH MATERIAL.
U	EXISTING PAVEMENT.
V1	MILLING 2.0″ IN DEPTH

01-NOV-2023 15:12
Resurfacing_Chatham_December2023_Submittal\Chatham_January2024_Maps_Typ.dgn