


**PAVEMENT SCHEDULE**


		S	SHOULDER RECONSTRUCTION
C1	1" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD.	U	EXISTING PAVEMENT
C2	1¼" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 137.5 LBS. PER SQ. YD.	V1	1½" MILLING
C3	1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.	V2	0" - 1 ½" MILLING
C4	1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.		

**PROJECT REFERENCE NO.**  
2024CPT.05.09.20921.I, ETC.

**SHEET NO.**  
12

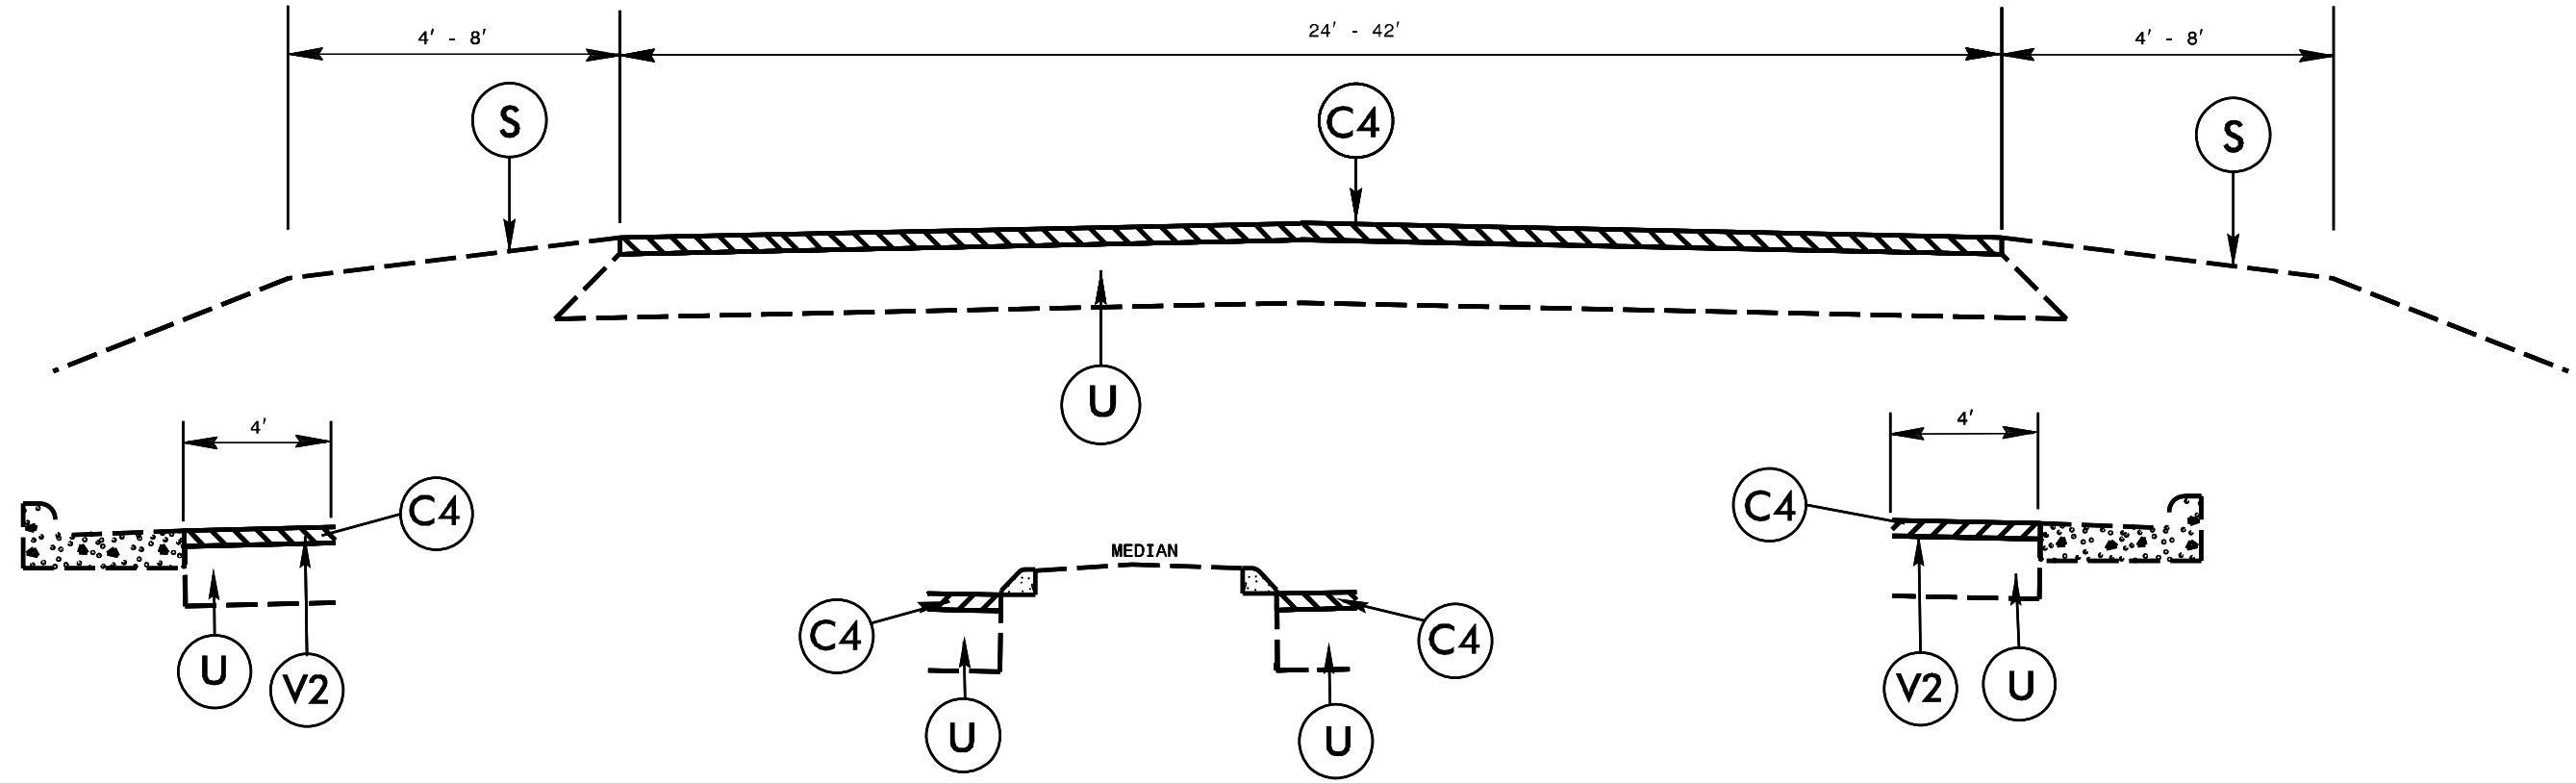

**TYPICAL SECTION NO. 6**

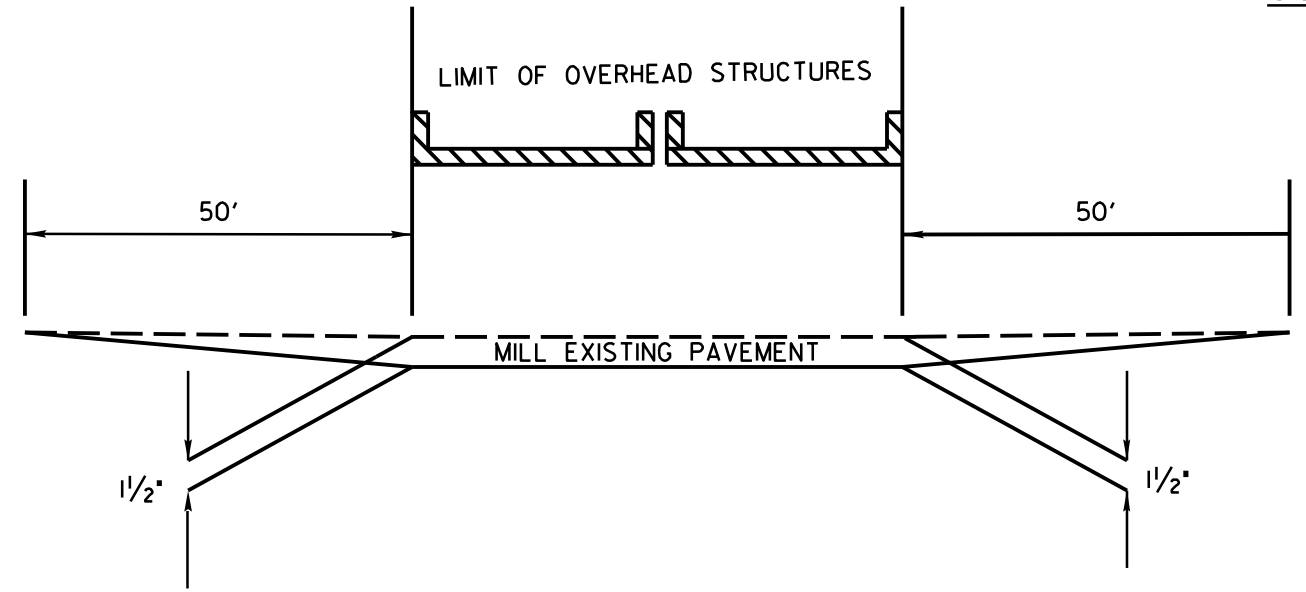

\* Use 0" - 1 ½" MILLING on map # 2

when Overlaying 1.5" on SR-2233 / S SMITHFIELD RD map #2

USE 1/2" MILLING TO MAINTAIN VERTICAL CLEARANCE under US 64 HWY EB & US 64 HWY WB Bridge