

WBS ELEMENT SHEET NO.

2024CPT.08.12.10771
2024CPT.08.12.20771

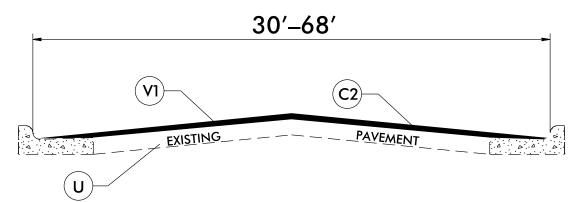

TYPICAL SECTION NO. 3

USE FOR SECTIONS OF MAP 5 WITH C+G WHERE GUTTER HAS BEEN PAVED

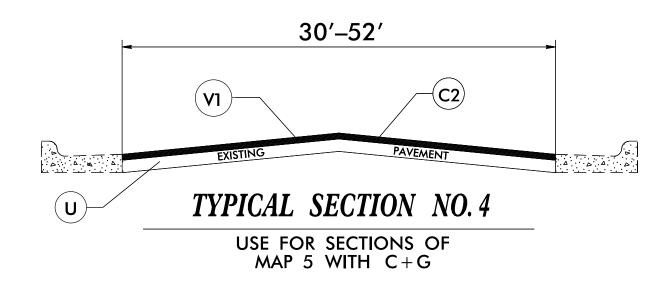

	ļ	22–30′	1
	6' SHOULDER RECONSTRUCTION	<u>C1</u>	SHOULDER RECONSTRUCTION
_	s	EXISTINGPAVEMENT	<u>s</u>
TYPICAL SECTION NO. 5			

USE FOR MAPS 6,7, AND 8

PAVEMENT SCHEDULE		
C1	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.	
C2	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE \$9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.	
S	AGGREGATE SHOULDER BORROW	
U	EXISTING PAVEMENT	
V1	MILLING 1.5" IN DEPTH	