


See Table 1 within Rumble Strip
Policy for Design Guidance

PLAN VIEW


TRAVEL LANE(S)
ASPHALT ROADWAY

PAVEMENT MARKING
MATERIAL

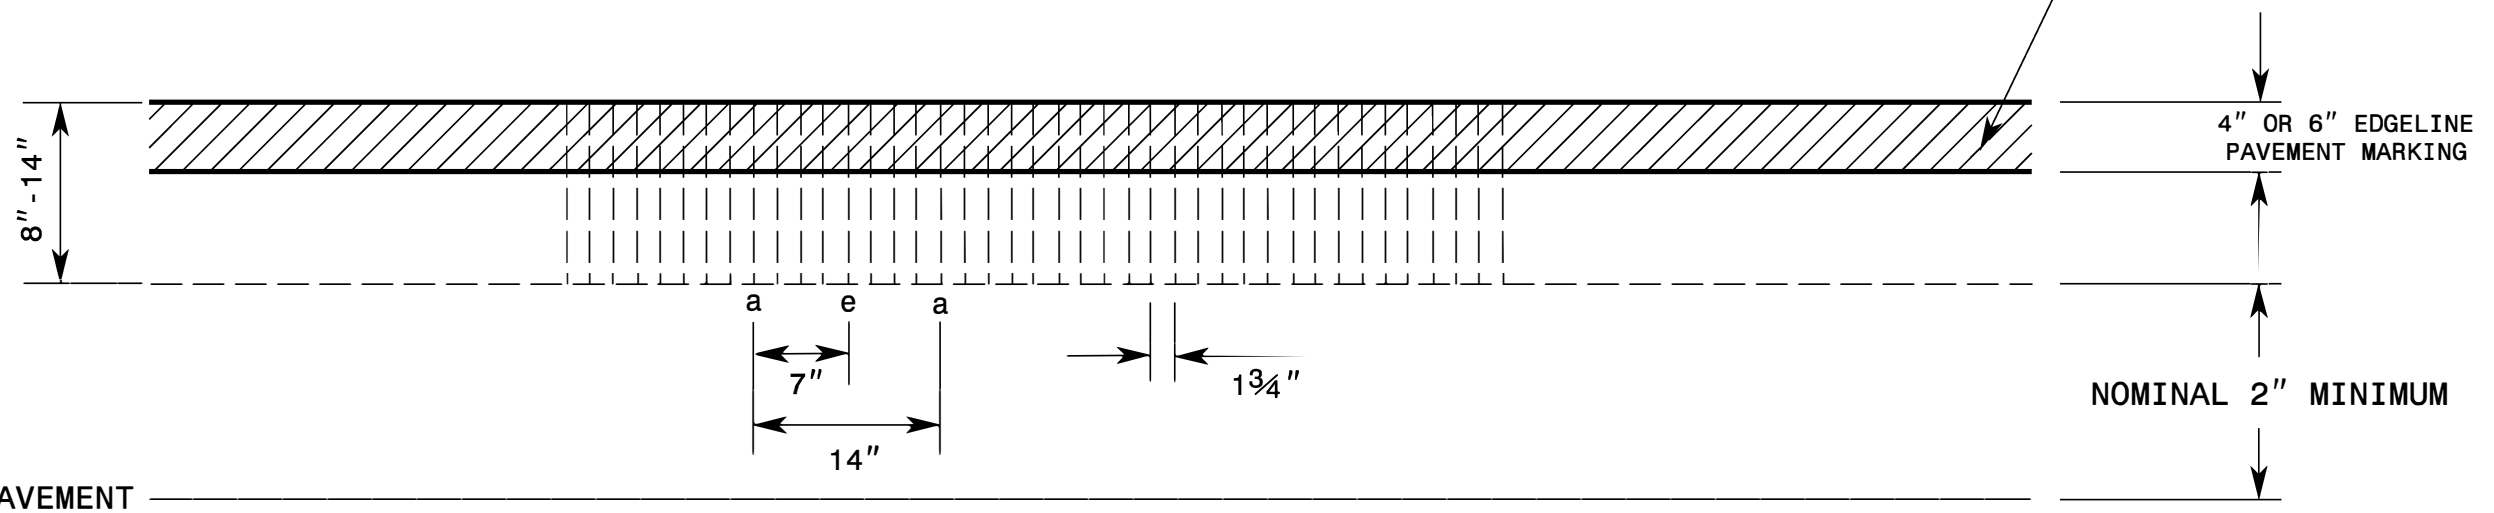

EDGE OF PAVEMENT

PROFILE VIEW

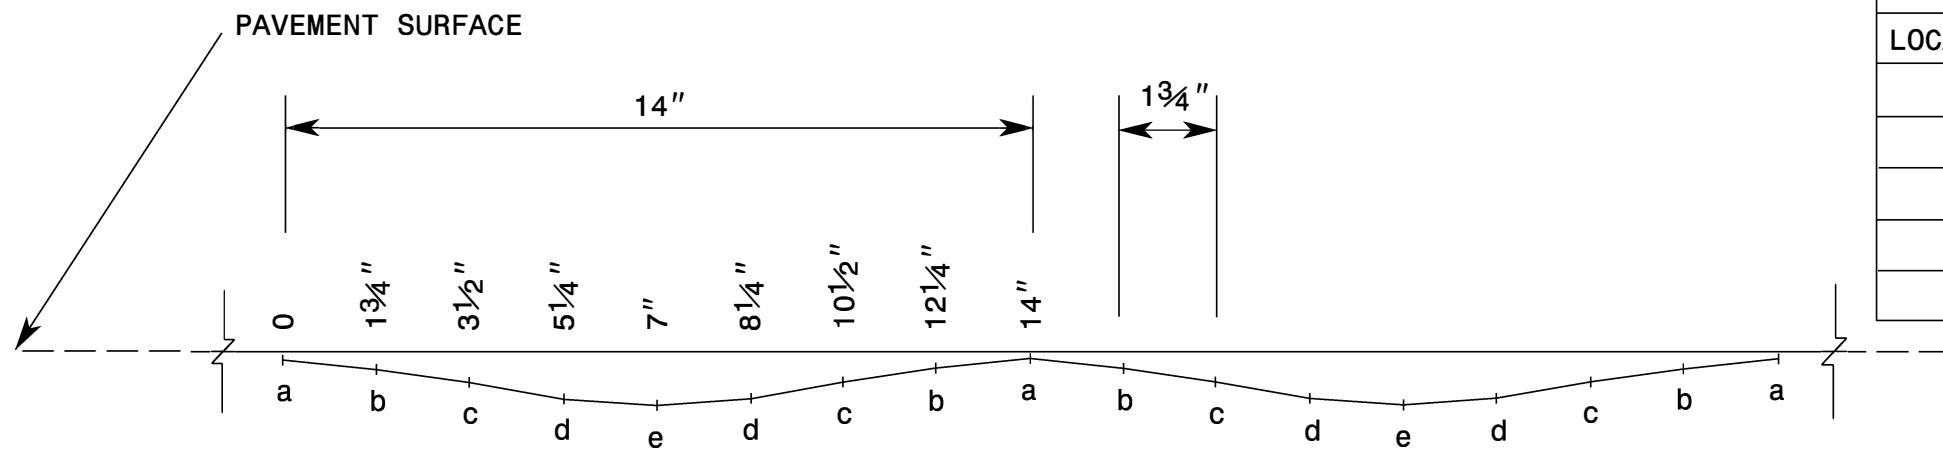

LOCATION	DEPTH	
	MIL	INCHES
a	62.5	1/16"
b	125	1/8"
c	219	7/32"
d	344	11/32"
e	375	3/8"

REFERENCE DRAWING ID: Sin.Stripe

DRAFT REFERENCE DRAWING: FEBRUARY 2023

NOTES:

- 1) Specification in table taken from MNDOT Research Project Final Report 2016-23: *Sinusoidal Rumble Strip Design Optimization Study By Terhaar et. al. June 2016*
- 2) USING A VACUUM, REMOVE ALL DEBRIS FROM THE MILLINGS JUST PRIOR TO PLACING ANY PAVEMENT MARKINGS.
- 3) ENSURE GLASS BEADS ARE SPREAD UNIFORMLY OVER THE ENTIRE SURFACE OF THE PAVEMENT MARKING MATERIAL.