


PAVEMENT SCHEDULE

C3	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD. IN EACH OF TWO LAYERS
T	SHOULDER RECONSTRUCTION
U	EXISTING PAVEMENT.


NOTES:

- * ALL PAVED S.R. ROADS TO BE RESURFACED TO THE ENDS OF THE RADII., OR AS DIRECTED BY THE ENGINEER
- * CONTRACTOR SHALL PERFORM FULL DEPTH PATCHING PRIOR TO RESURFACING ON SELECT MAPS AS DIRECTED BY THE ENGINEER.

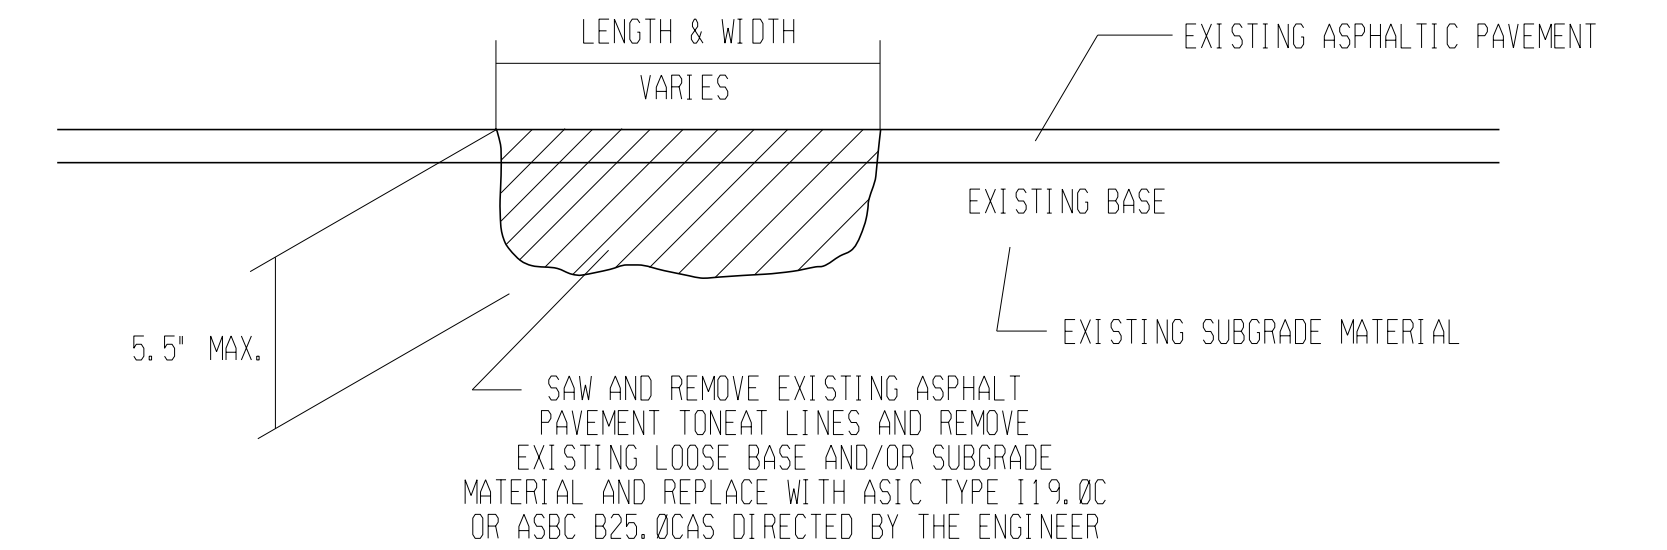

*NOTE: EDGES OF PATCHED AREA ARE TO BE CLEANED OF ALL DEBRIS AND COATED WITH AN APPROVED TACK MATERIAL BEFORE PLACING ASPHALT.

FULL DEPTH PATCHING

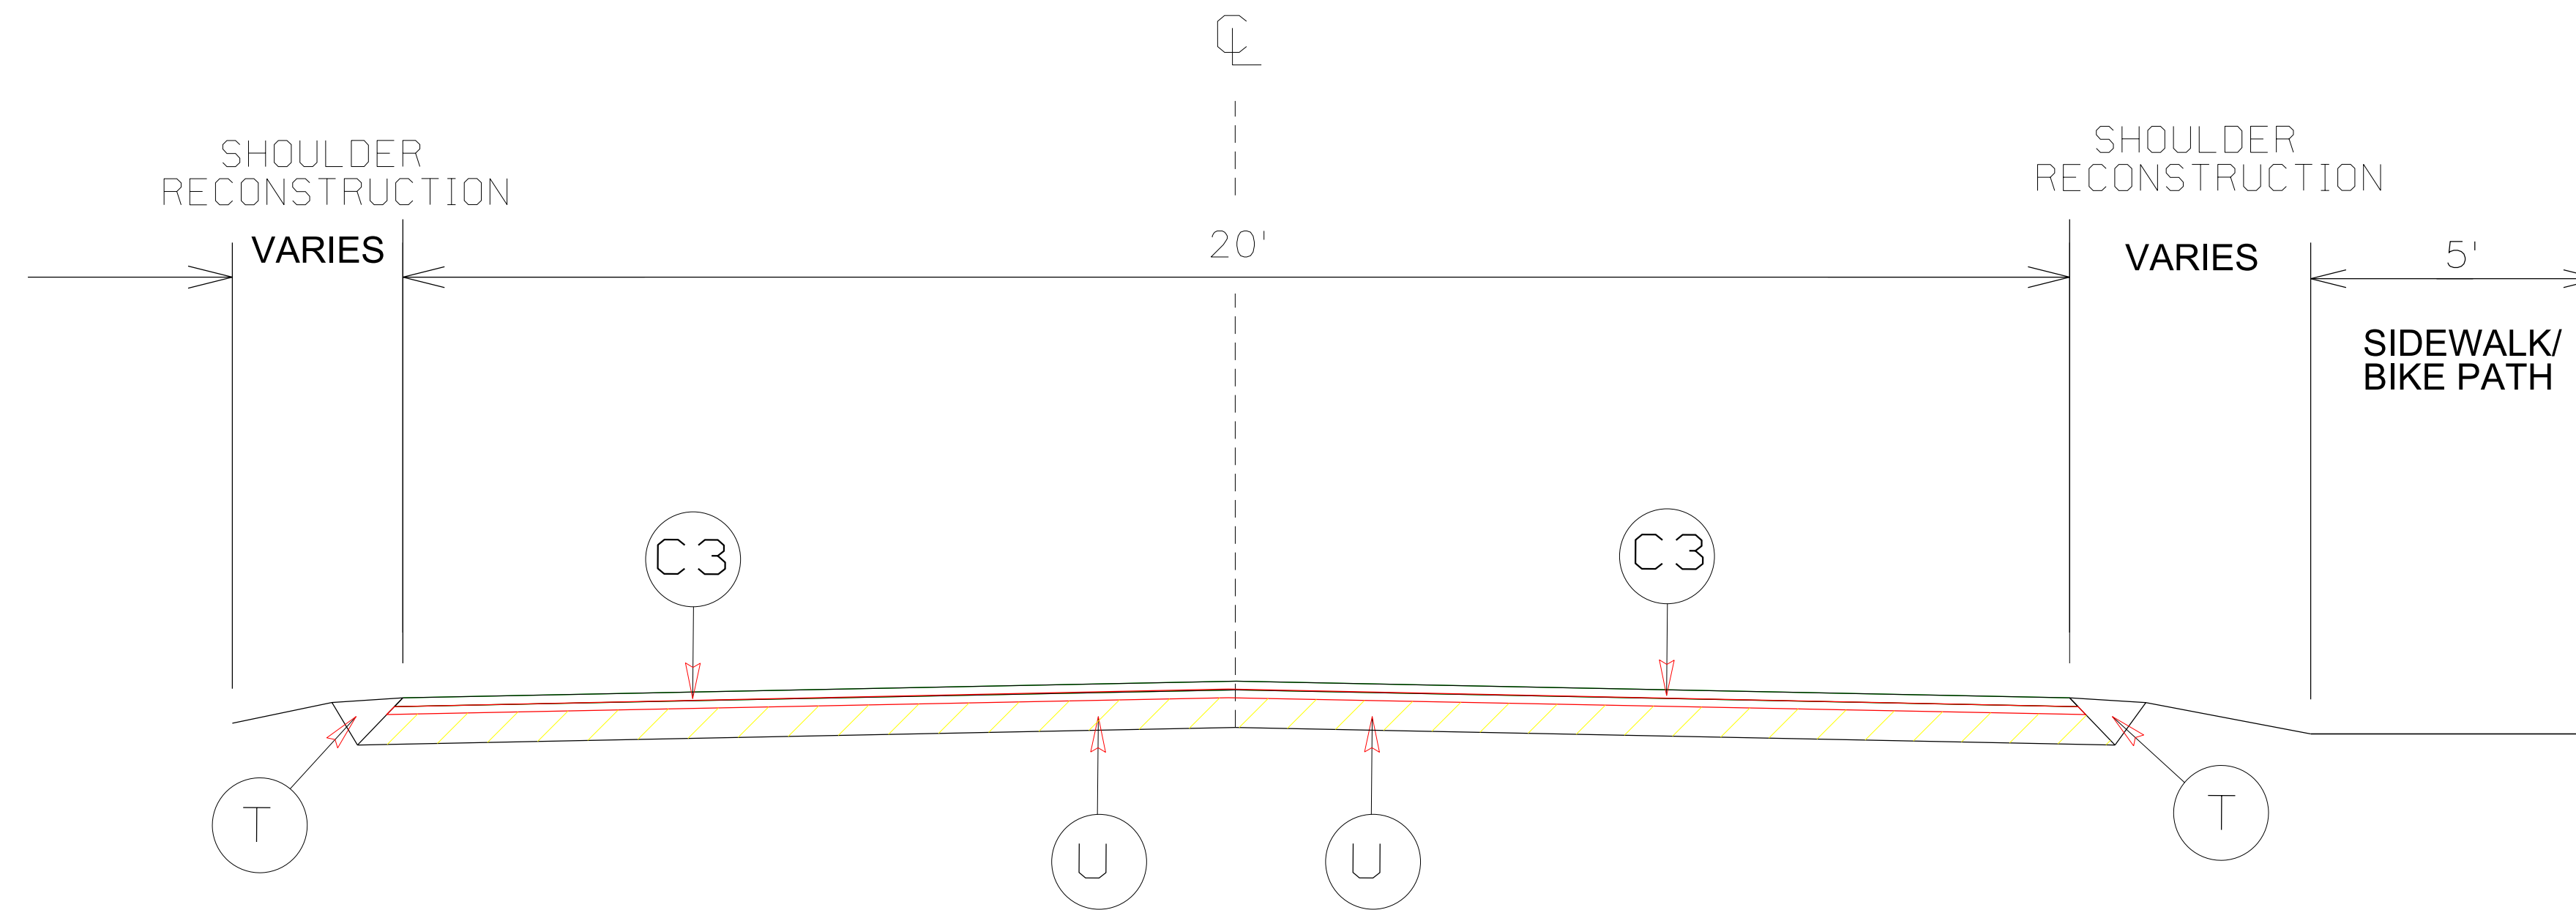

TYPICAL SECTION NO. 1

USE WITH MAP 1

SIDEWALK & PAVING SEQUENCE (DETOUR ONLY)

- 1) REMOVE CONCRETE SIDEWALK/BIKE PATH FROM STA. 4+71 THRU STA. 5+55 - BEFORE RESURFACING
- 2) PLACE INCIDENTAL STONE BASE AT SIDEWALK/BIKE PATH LOCATION TO MAINTAIN PUBLIC USE
- 3) PLACE ASPHALT LAYER 1, CONSISTING OF 1.5" OF S9.5B
- 4) PLACE PAINT PAVEMENT MARKING LINES
- 5) CONSTRUCT BRIDGE & REOPEN TO TRAFFIC
- 6) PLACE ASPHALT LAYER 2, CONSISTING OF 1.5" OF S9.5B
- 7) PLACE FINAL PAVEMENT MARKINGS (HOT SPRAY THERMO MARKING LINES)
- 8) REMOVE INCIDENTAL STONE BASE & CONSTRUCT SIDEWALK/BIKEPATH BACK IN ORIGINAL LOCATION AT NEW PAVEMENT ELEVATION