



**SHOULDER RECONSTRUCTION**

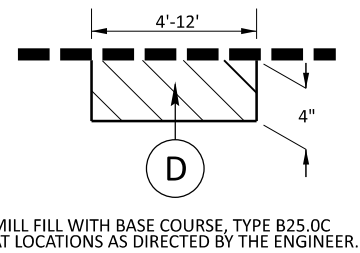

MILL FILL WITH BASE COURSE, TYPE B25.0C AT LOCATIONS AS DIRECTED BY THE ENGINEER.

**PATCHING EXISTING PAVEMENT DETAIL**

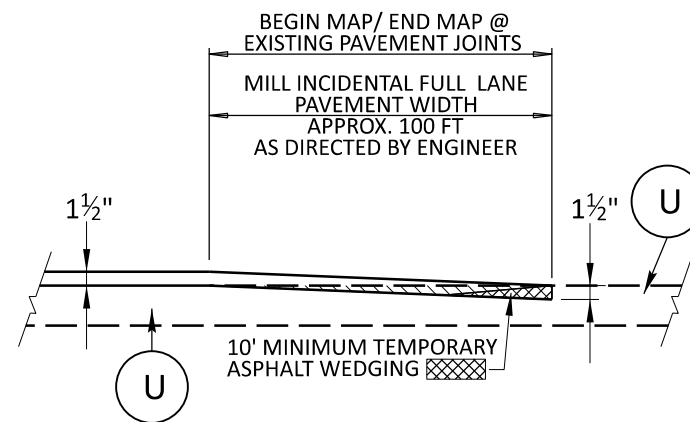

**INCIDENTAL MILLING AT TIE-IN DETAIL**

PAVEMENT SCHEDULE	
C	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, TO BE APPLIED AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.
D	PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
E	PROP. APPROX. 8" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.
S	SHOULDER RECONSTRUCTION (SEE DETAIL)
U	EXISTING PAVEMENT