


APPROVED: *Andrew Klimek*
33078784596E44B
 DATE: 2/1/2024

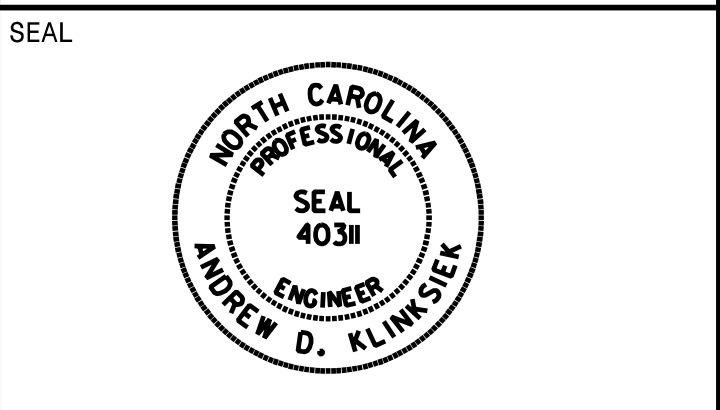

**DOCUMENT NOT CONSIDERED FINAL
 UNLESS ALL SIGNATURES COMPLETED**

SIGN NUMBER: 16C **BACKG COLOR:** Green/Yellow
TYPE: A (OVHD) **COPY COLOR:** White/Black
QUANTITY: 1


| SYMBOL | X | Y | WID | HT |
|--------------|-------|-------|-----|------|
| M1_4 | 33.7 | 101.7 | 36 | 36 |
| M1_4 | 117.5 | 101.7 | 36 | 36 |
| M1_4 | 219.7 | 101.7 | 36 | 36 |
| M1_4 | 303.5 | 101.7 | 36 | 36 |
| Type C Arrow | 73 | 8 | 32 | 22 |
| Type C Arrow | 259.8 | 8 | 32 | 22 |
| Vertical Bar | 185.1 | 2 | 1.5 | 34 |
| Vertical Bar | 184.8 | 77.7 | 2 | 76.3 |

SIGN WIDTH: 31'-0"
HEIGHT: 15'-0"
TOTAL AREA: 465.0 Sq.Ft.

BORDER TYPE: VAR.
RECESS: VAR.
WIDTH: VAR.
RADII: VAR.

NO. Z BARS: 6
LENGTH: 364.0 **MAT'L:** 0.125" ALUMINUM

DESIGN BY: TRT **CHECKED BY:** NKV
PROJECT ID: I-2513AA/AB **DIV:** 13 **DATE:** July 2023

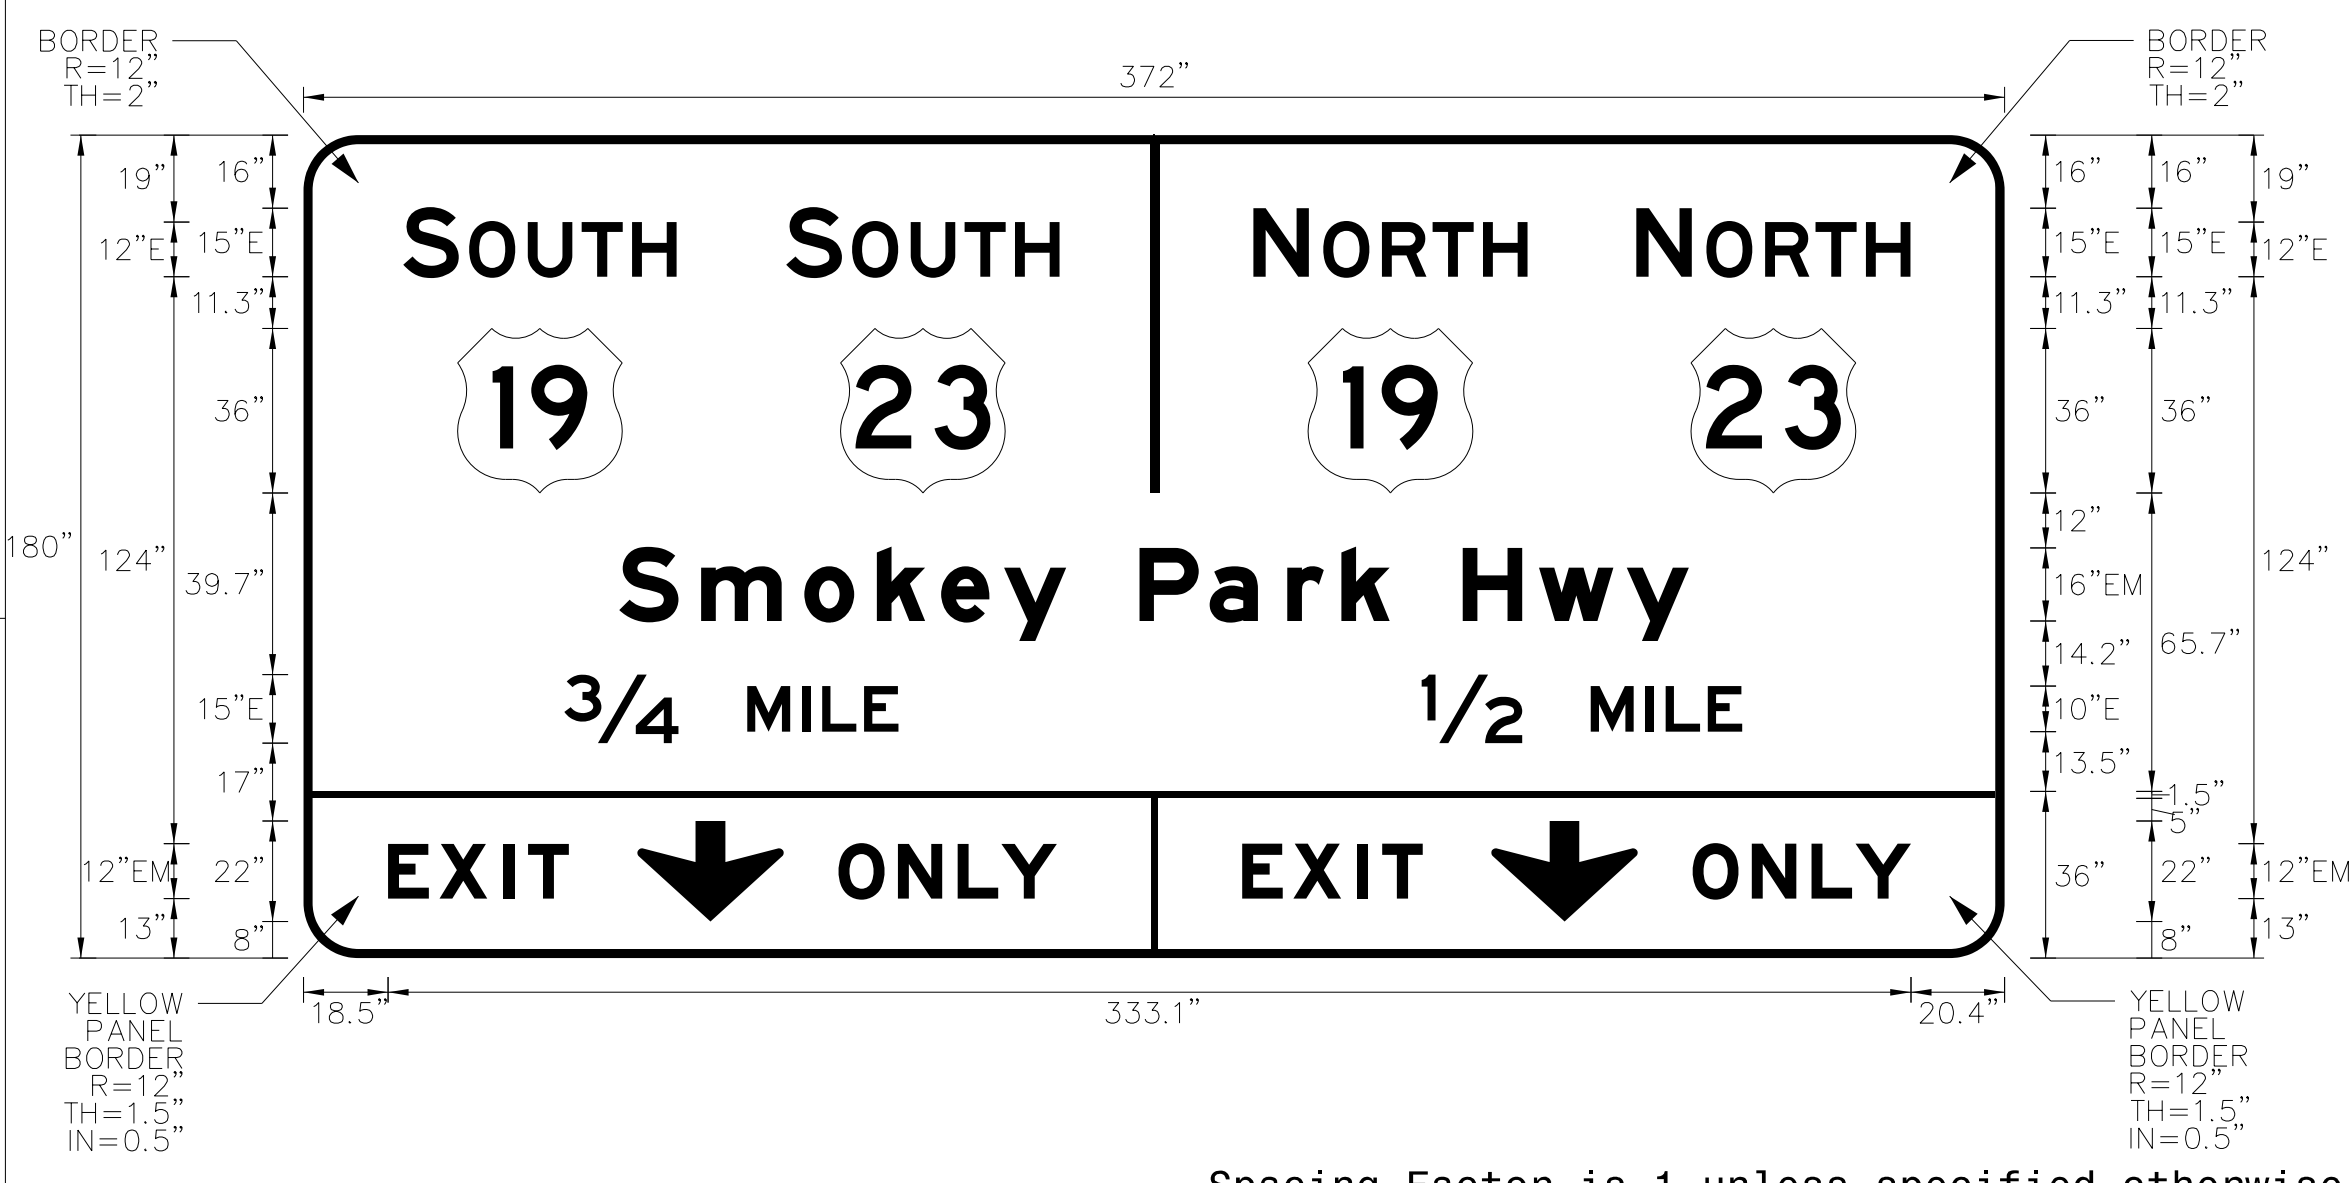

Spacing Factor is 1 unless specified otherwise
 Spacing Factor for "EXIT" is 1.4

- NOTES:**
- Legend and border shall be direct applied Grade A reflective sheeting.
 - Shields shall be Grade A reflective sheeting on 0.032" aluminum and demountable.
 - Background shall be Grade C reflective sheeting.
 - Bottom panels shall be yellow Grade C sheeting. Legend shall be direct applied black non-reflective sheeting. Arrows shall be black non-reflective sheeting on 0.032" aluminum and demountable. Yellow panel is 372" X 36". (Border Type = Recessed, Recess = 0.5", Width = 1.5", Radii = 12")

LETTER POSITIONS

| Letter spacings are to start of next letter | | | | | | | | | | | | | | | | | | | | Series/Size |
|---|------|------|------|------|-------|------|-------|------|----|------|------|----|------|------|------|----|--|--|--|-------------|
| | | | | | | | | | | | | | | | | | | | | Text Length |
| | S | | O | U | T | H | | | | | | | | | | | | | | E 2000 |
| 21.8 | 12.2 | 2.2 | 12.8 | 11.8 | 11 | 9.7 | 290.4 | | | | | | | | | | | | | 59.8 |
| | S | | O | U | T | H | | | | | | | | | | | | | | E 2000 |
| 105.6 | 12.2 | 2.2 | 12.8 | 11.8 | 11 | 9.7 | 206.7 | | | | | | | | | | | | | 59.8 |
| | N | | O | R | T | H | | | | | | | | | | | | | | E 2000 |
| 207.7 | 12.2 | 3.1 | 12.8 | 11 | 11 | 9.7 | 104.3 | | | | | | | | | | | | | 59.9 |
| | N | | O | R | T | H | | | | | | | | | | | | | | E 2000 |
| 291.5 | 12.2 | 3.1 | 12.8 | 11 | 11 | 9.7 | 20.6 | | | | | | | | | | | | | 59.9 |
| | S | m | o | k | e | y | | P | a | r | k | | H | w | y | | | | | EM 2000 |
| 69 | 17.9 | 22.6 | 15.8 | 14.1 | 13.8 | 13.6 | 16 | 15.4 | 17 | 11.8 | 10.6 | 16 | 16.6 | 19.2 | 13.6 | 69 | | | | 233.9 |
| | 3/4 | | M | I | L | E | | | | | | | | | | | | | | E 2000 |
| 57 | 25 | 15 | 12 | 4.4 | 9.2 | 7.5 | 241.9 | | | | | | | | | | | | | 73.1 |
| | 1/2 | | M | I | L | E | | | | | | | | | | | | | | E 2000 |
| 244.5 | 22 | 15 | 12 | 4.4 | 9.2 | 7.5 | 57.4 | | | | | | | | | | | | | 70.1 |
| | E | X | I | T | | | | | | | | | | | | | | | | EM 2000 |
| 18.5 | 11.2 | 14 | 5.4 | 8.9 | 314 | | | | | | | | | | | | | | | 39.5 |
| | O | N | L | Y | | | | | | | | | | | | | | | | EM 2000 |
| 117 | 13 | 13.1 | 9.6 | 12.1 | 207.2 | | | | | | | | | | | | | | | 47.8 |
| | E | X | I | T | | | | | | | | | | | | | | | | EM 2000 |
| 205.3 | 11.2 | 14 | 5.4 | 8.9 | 127.2 | | | | | | | | | | | | | | | 39.5 |
| | O | N | L | Y | | | | | | | | | | | | | | | | EM 2000 |
| 303.8 | 13 | 13.1 | 9.6 | 12.1 | 20.5 | | | | | | | | | | | | | | | 47.8 |