DocuSign Envelope ID: 704CD238-6A02-4324-9404-75C2F520F268

TIP NO.	SHEET NO.
HB-0004	SIGN-3A

APPROVED: Docusigned by: Regina M. Muncey C7FE51B522454FA...

DATE: 4/8/2024

SEAL

NORTH CAROLINA PROFESSIONAL SEAL 43239 ENGINEER REGINA M. MUNCEY

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

Stantec

SIGN NUMBER: 106
TYPE: A
QUANTITY: 1

SIGN WIDTH: 66″
HEIGHT: 60″
TOTAL AREA: 27.5 Sq.Ft.

BORDER TYPE: FLUSH
RADII: 3″
WIDTH: 1″
RECESS: 0″

NO. Z BARS: 2
LENGTH: 58.0

BACKG COLOR: Green / Green
COPY COLOR: White/Black

SYMBOL	X	Y	WID	HT
AR_Type D	11.6	42.3	8	12

MAT'L: 0.125″ (3.2MM) ALUMINUM

DESIGN BY: RRH
PROJECT ID: HB-0004
CHECKED BY: R. MUNCEY
DIV: 14
DATE: Dec 07, 2023



Spacing Factor is 1 unless specified otherwise

USE NOTES

1. Legend and border (except those that are colored black) shall be direct applied Grade C sheeting.
2. Background shall be Grade C reflective sheeting.
3. Yellow Panel shall be Grade C sheeting with direct applied black non-reflective sheeting for legend. RADII: 1.5″

LETTER POSITIONS

Letter spacings are to start of next letter

																						Series/Size Text Length
	C	l	y	d	e																	D 2000
27.6	7	2.2	6.6	6.1	4.7	11.6																26.7
	A	s	h	e	v	i	l	l	e													D 2000
11.5	7.4	4.8	5.9	5.2	6.6	2.9	2.9	2.6	4.7	11.5												43
	R	I	G	H	T		L	A	N	E												E 2000
10.4	5	2	5.2	4.9	3.8	5	4.2	5.9	5.4	3.8	10.4											45.2

SIGN NUMBER: 107
TYPE: A
QUANTITY: 1

SIGN WIDTH: 78″
HEIGHT: 66″
TOTAL AREA: 35.8 Sq.Ft.

BORDER TYPE: FLUSH
RADII: 6″
WIDTH: 1″
RECESS: 0″

NO. Z BARS: 2
LENGTH: 70.0

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT
AR_Type D	18.5	49	8	12
M1_1	9.7	19	24	24
M1_4	44.3	19	24	24
AR_Type D	48.9	5	8	12

MAT'L: 0.125″ (3.2MM) ALUMINUM

DESIGN BY: RRH
PROJECT ID: HB-0004
CHECKED BY: R. MUNCEY
DIV: 14
DATE: Dec 07, 2023

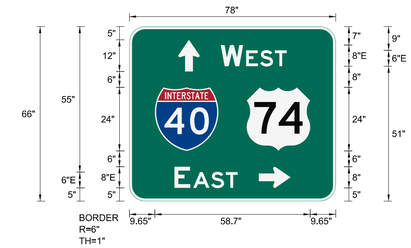

Spacing Factor is 1 unless specified otherwise

USE NOTES

1. Legend and border (except those that are colored black) shall be direct applied Grade C sheeting.
2. Background shall be Grade C reflective sheeting.

LETTER POSITIONS

Letter spacings are to start of next letter

																						Series/Size Text Length
	W		E	S	T																	E 2000
34.5	8.5	1.1	5.3	5.5	4.5	18.5																24.9
	E		A	S	T																	E 2000
17	6	1.1	6.8	5.5	4.5	37.1																23.9

SIGN NUMBER: 108,109
TYPE: A
QUANTITY: 2

SIGN WIDTH: 96″
HEIGHT: 60″
TOTAL AREA: 40.0 Sq.Ft.

BORDER TYPE: FLUSH
RADII: 3″
WIDTH: 1″
RECESS: 0″

NO. Z BARS: 2
LENGTH: 88.0

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT
Triskelion	7.1	3.75	7	7
USDOT LOGO	73.15	3.75	19	7

MAT'L: 0.125″ (3.2MM) ALUMINUM

DESIGN BY: RRH
PROJECT ID: HB-0004
CHECKED BY: R. MUNCEY
DIV: 14
DATE: May 09, 2023

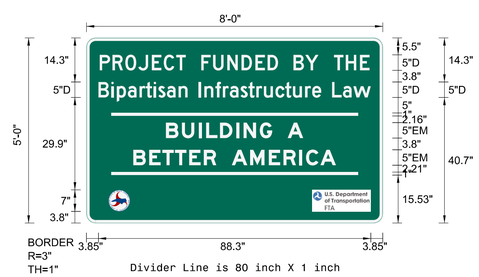

Divider Line is 80 inch X 1 inch

Spacing Factor is 1 unless specified otherwise

USE NOTES

1. Legend and border (except those that are colored black) shall be direct applied Grade C sheeting.
2. Background shall be Grade C reflective sheeting.

LETTER POSITIONS

Letter spacings are to start of next letter

																																		Series/Size Text Length
	P	R	O	J	E	C	T		F	U	N	D	E	D		B	Y		T	H	E													D 2000
4.3	4.1	4.2	4.2	4.4	3.8	4	3.1	5	3.9	4.6	4.6	4.5	4	3.4	5	3.8	4.3	5	3.8	4.6	3.1	4.3												87.5
	B	i	p	a	r	t	i	s	a	n		I	n	f	r	a	s	t	r	u	c	t	u	r	e		L	a	w					D 2000
3.9	4.2	1.8	3.5	3.8	2	2.5	1.5	2.8	3.8	3	3.5	1.9	3.6	2.4	2.2	3.5	2.5	2.6	2.4	3.8	3.1	2.5	4	2.3	3	3.5	3.5	3.4	5.7	3.9				88.3
	B	U	I	L	D	I	N	G		A																								EM 2000
25.7	5.1	5.5	2.4	4.5	5.3	2.4	5.3	4	5	5.1	25.7																							44.5
	B	E	T	T	E	R		A	M	E	R	I	C	A																				EM 2000
15.2	5.2	4.2	4.1	4.6	4.8	4	5	6	6.1	4.7	5.1	2.2	4.6	5.1	15.2																			65.7

SIGN NUMBER: 201,202
TYPE: A
QUANTITY: 2

SIGN WIDTH: 78″
HEIGHT: 60″
TOTAL AREA: 32.5 Sq.Ft.

BORDER TYPE: FLUSH
RADII: 6″
WIDTH: 1.5″
RECESS: 0″

NO. Z BARS: 2
LENGTH: 70.0

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT
AR_Type A	49	6	18.3	29.3

MAT'L: 0.125″ (3.2MM) ALUMINUM

DESIGN BY: RRH
PROJECT ID: HB-0004
CHECKED BY: R. MUNCEY
DIV: 14
DATE: Oct 02, 2023

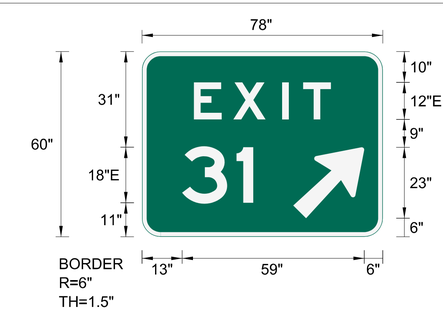

Spacing Factor is 1 unless specified otherwise

USE NOTES

1. Legend and border (except those that are colored black) shall be direct applied Grade C sheeting.
2. Background shall be Grade C reflective sheeting.
3. Shields; A, B, and C type arrows shall be on 0.032″ (0.8mm) aluminum and demountable.

LETTER POSITIONS

Letter spacings are to start of next letter

																																		Series/Size Text Length
	E	X	I	T																														E 2000
16.8	12.8	15.8	6.8	9	16.8																													44.4
	3	1																																E 2000
13	17.6	5.4	42																															23

TYPE 'A' & 'B'
GROUND MOUNTED SIGNS

$$$$SYSTIME$$$$
$$$$USERNAME$$$$
$$$$DGN$$$$