


### TYPICAL SECTION NO. 1


MAP 1 - FROM MM 36.5 TO MM 45.3  
 MAP 2 - FROM MM 36.5 TO MM 45.3

\*NOTES FOR ALL TYPICALS:

-SEE BRIDGE APPROACH AND DEPARTURE DETAIL FOR PAVEMENT TRANSITIONS AT BRIDGE UNDERPASSES & OVERPASSES.

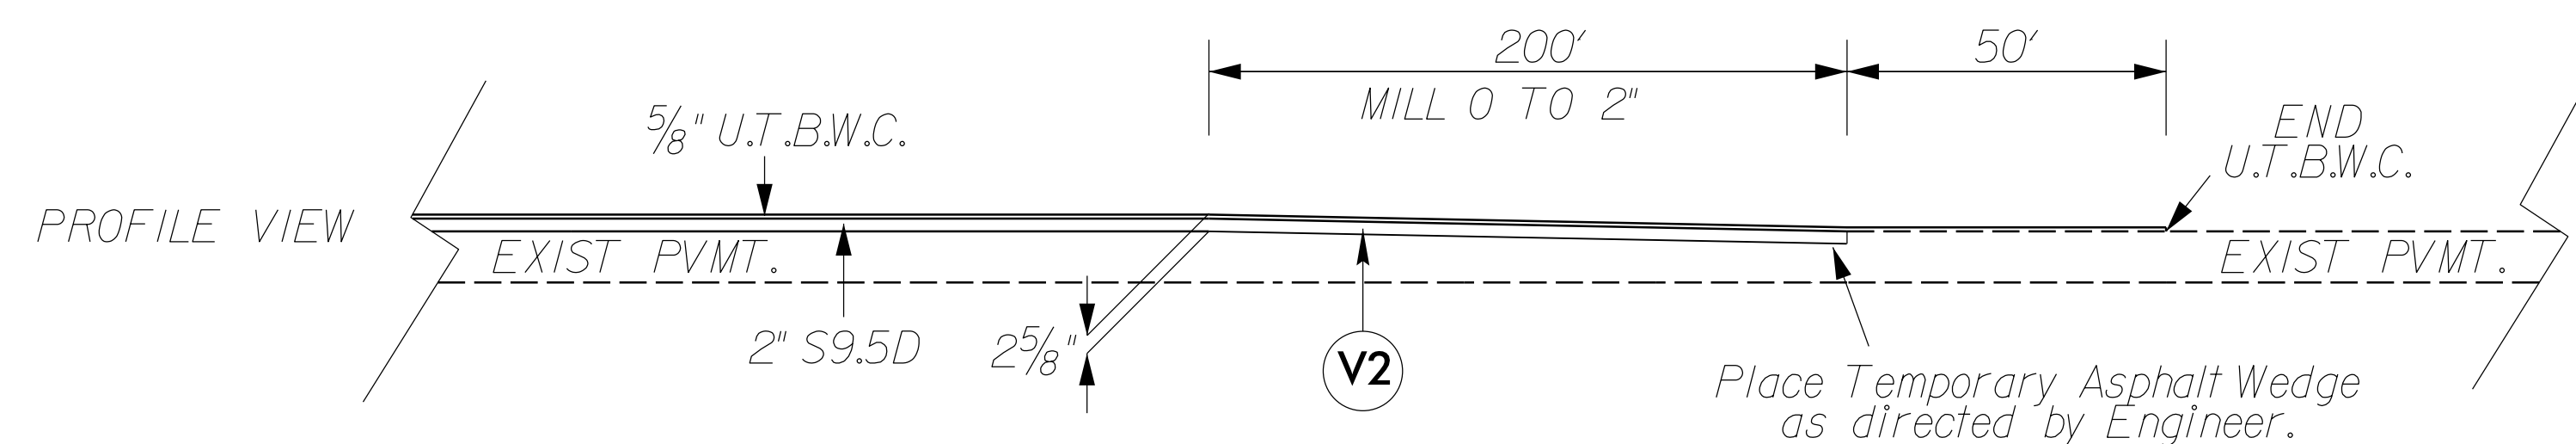

### TIE-IN DETAIL AT MM 36.5 NB & SB

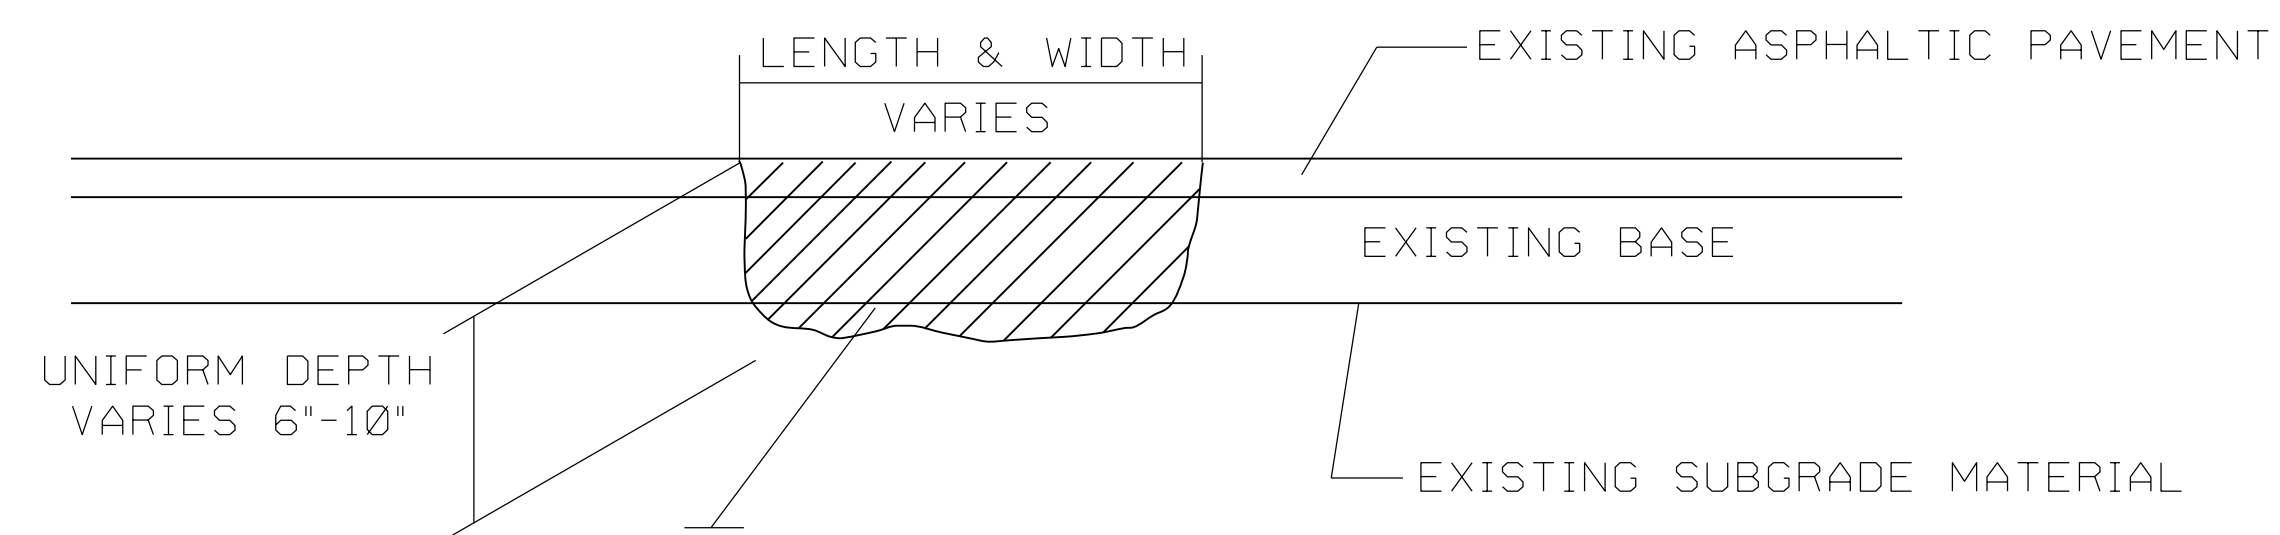

REMOVE EXISTING ASPHALT PAVEMENT AND REMOVE EXISTING LOOSE BASE AND/OR SUBGRADE MATERIAL AND REPLACE WITH ACBC OR ACSC AS DIRECTED BY THE ENGINEER.

### PATCHING EXISTING ASPHALT PAVEMENT DETAIL

### PAVEMENT SCHEDULE

C	PROP. APPROX. 2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.
C1	PROP. APPROX. 2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D AT AN AVERAGE RATE OF 224 LBS. PER SQ. YARD.
C2	PROP. APPROX. 2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YARD.
C3	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YARD IN EACH OF TWO LIFTS.
E	PROP. APPROX. 5½" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 627 LBS. PER SQ. YARD
E1	PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, WITH FIBER REINFORCEMENT, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YARD
T	SHOULDER RECONSTRUCTION (AGGREGATE SHOULDER BORROW)
U	EXISTING CONCRETE PAVEMENT.
U1	EXISTING ASPHALT PAVEMENT.
V	MILL ASPHALT PAVEMENT APPROX. 5/8" DEPTH
V1	MILL ASPHALT PAVEMENT APPROX 2" DEPTH
V2	MILL ASPHALT PAVEMENT APPROX 0 to 2" DEPTH
V3	MILL ASPHALT PAVEMENT APPROX. 6" TOTAL DEPTH IN TWO 3" PASSES
Y	PROP. APPROX. 5/8" ULTRA-THIN BONDED WEARING COURSE, AT AN AVERAGE RATE OF 70 LBS. PER SQ. YD. PER 5/8" DEPTH
Z	MILLED RUMBLE STRIPS

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.