

	PAVEMENT SCHEDULE
С	PROP. APPROX. 2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.
C1	PROP. APPROX. 2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D AT AN AVERAGE RATE OF 224 LBS. PER SQ. YARD.
C2	PROP. APPROX. 2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YARD.
С3	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YARD IN EACH OF TWO LIFTS.
E	PROP. APPROX. 5½" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 627 LBS. PER SQ. YARD
E1	PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, WITH FIBER REINFORCEMENT, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YARD
Т	SHOULDER RECONSTRUCTION (AGGREGRATE SHOULDER BORROW)
U	EXISTING CONCRETE PAVEMENT.
U1	EXISTING ASPHALT PAVEMENT.
V	MILL ASPHALT PAVEMENT APPROX. 5/8" DEPTH
V1	MILL ASPHALT PAVEMENT APPROX 2" DEPTH
V2	MILL ASPHALT PAVEMENT APPROX 0 to 2" DEPTH
V3	MILL ASPHALT PAVEMENT APPROX. 6" TOTAL DEPTH IN TWO 3" PASSES
Υ	PROP. APPROX.5/8" ULTRA-THIN BONDED WEARING COURSE, AT AN AVERAGE RATE OF 70 LBS. PER SQ. YD. PER 5/8" DEPTH
Z	MILLED RUMBLE STRIPS

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

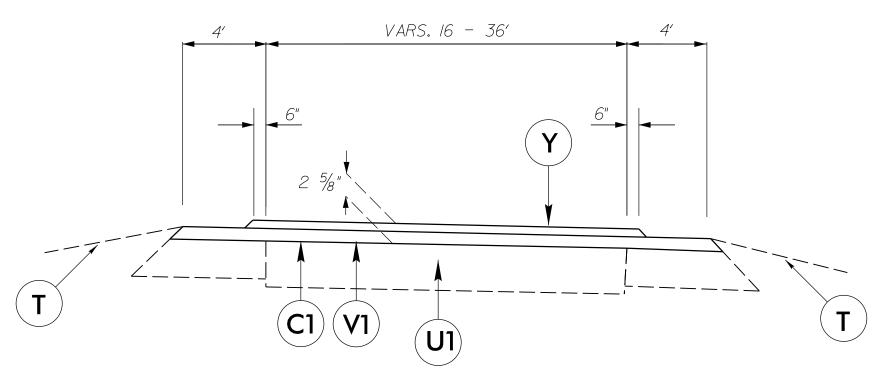


## TYPICAL SECTION NO. 4

MAP 3 - EXIT 42 NB OFF-RAMP

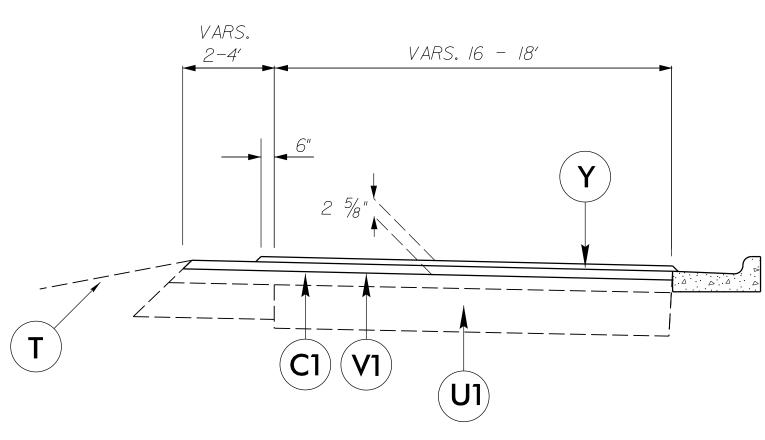


## TYPICAL SECTION NO. 5

MAP 4 - EXIT 42 NB ON-LOOP MAP 6 - EXIT 42 SB OFF-LOOP

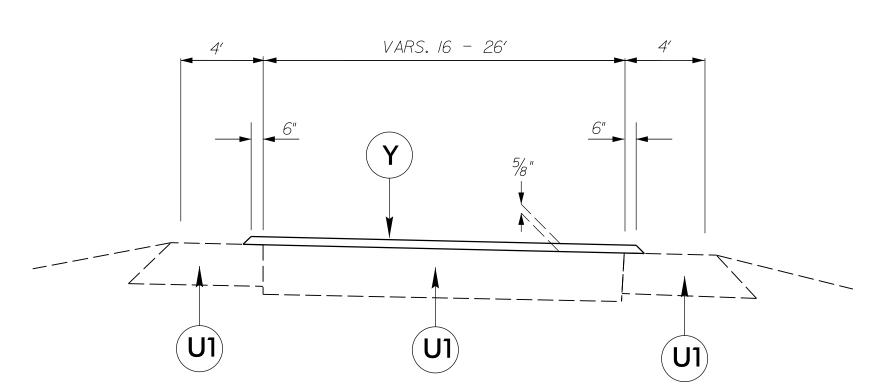

TYPICAL SECTION NO. 6

MAP 7 - EXIT 45 NB OFF-RAMP

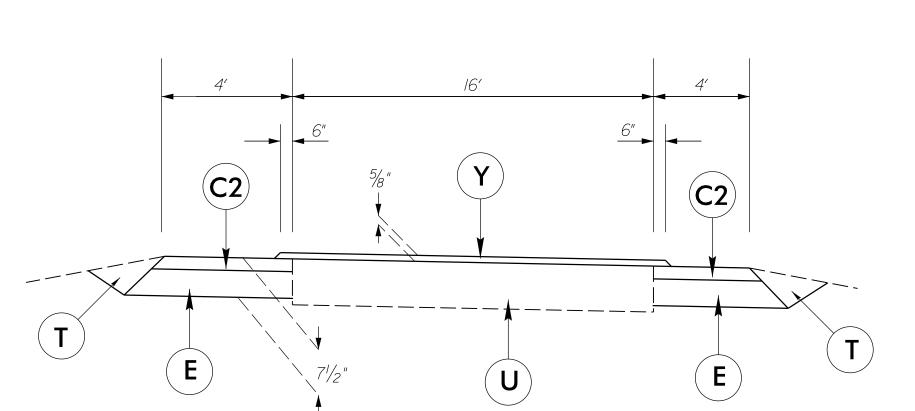

PROJECT REFERENCE NO.

1-5918


SHEET NO.

2A-4

\*\* Place base course by an approved trenching method.

## TYPICAL SECTION NO. 7

MAP 8 - EXIT 45 SB ON-RAMP

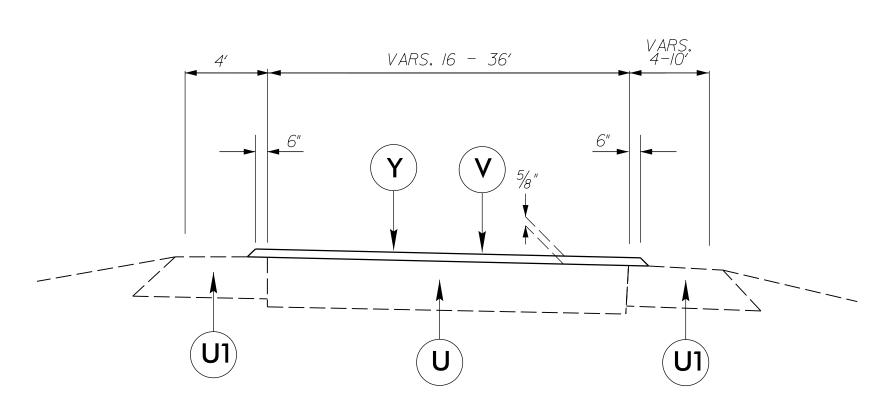

## TYPICAL SECTION NO. 8

MAP 9 - EXIT 45 NB ON-RAMP

MAP 10 - EXIT 45 SB OFF-RAMP

MAP 11 - EXIT 49A NB OFF-RAMP

MAP 12 - EXIT 49A SB ON-RAMP

MAP 16 - EXIT 49B NB ON-RAMP (4+50 TO 13+25)