



PAVEMENT SCHEDULE	
C	PROP. APPROX. 2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.
C1	PROP. APPROX. 2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D AT AN AVERAGE RATE OF 224 LBS. PER SQ. YARD.
C2	PROP. APPROX. 2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YARD.
C3	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YARD IN EACH OF TWO LIFTS.
E	PROP. APPROX. 5 1/2" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 627 LBS. PER SQ. YARD
E1	PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, WITH FIBER REINFORCEMENT, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YARD
T	SHOULDER RECONSTRUCTION (AGGREGATE SHOULDER BORROW)
U	EXISTING CONCRETE PAVEMENT.
U1	EXISTING ASPHALT PAVEMENT.
V	MILL ASPHALT PAVEMENT APPROX. 5/8" DEPTH
V1	MILL ASPHALT PAVEMENT APPROX 2" DEPTH
V2	MILL ASPHALT PAVEMENT APPROX 0 to 2" DEPTH
V3	MILL ASPHALT PAVEMENT APPROX. 6" TOTAL DEPTH IN TWO 3" PASSES
Y	PROP. APPROX. 5/8" ULTRA-THIN BONDED WEARING COURSE, AT AN AVERAGE RATE OF 70 LBS. PER SQ. YD. PER 5/8" DEPTH
Z	MILLED RUMBLE STRIPS

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

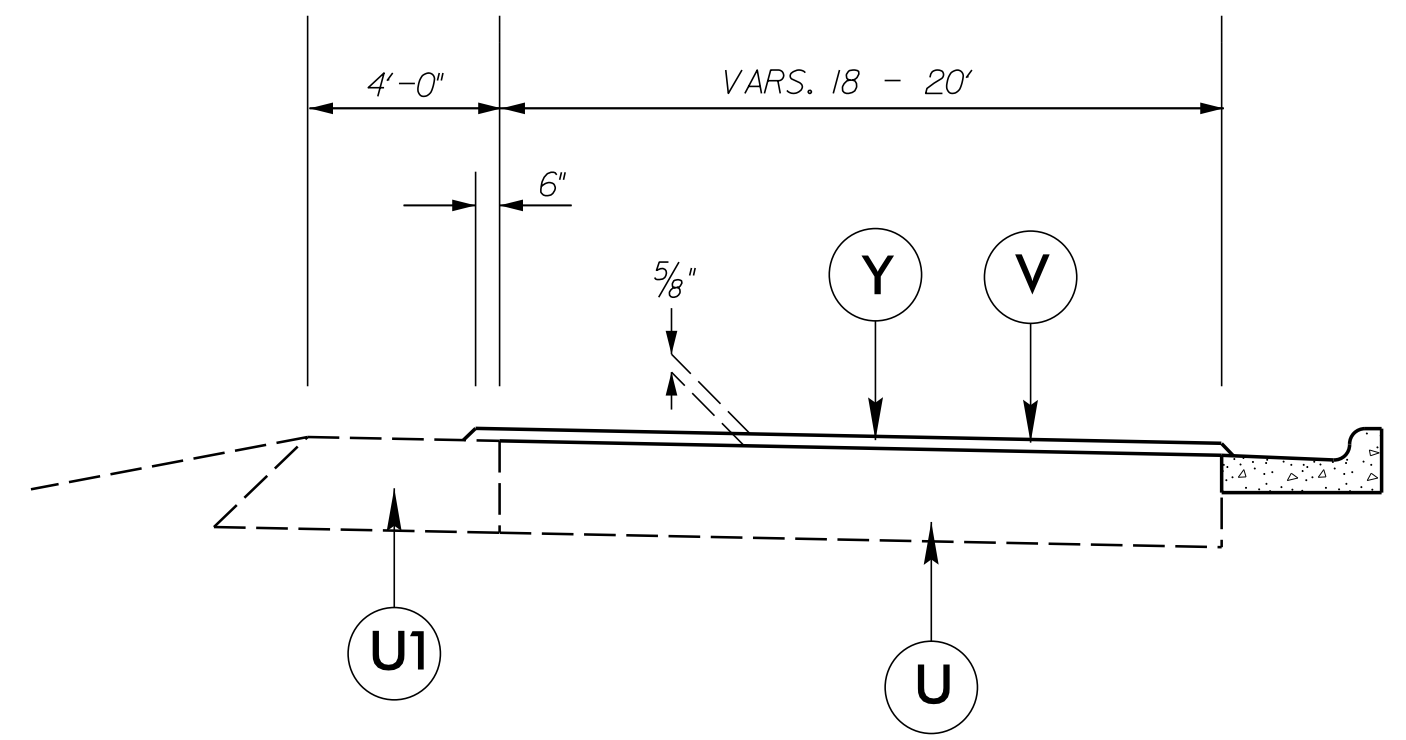


TYPICAL SECTION NO. 9

MAP 13 - EXIT 49A NB ON-LOOP
 MAP 15 - EXIT 49B NB OFF-LOOP (0+00 TO 4+25)
 MAP 17 - EXIT 49B SB ON-LOOP
 MAP 18 - EXIT 49B SB OFF-RAMP

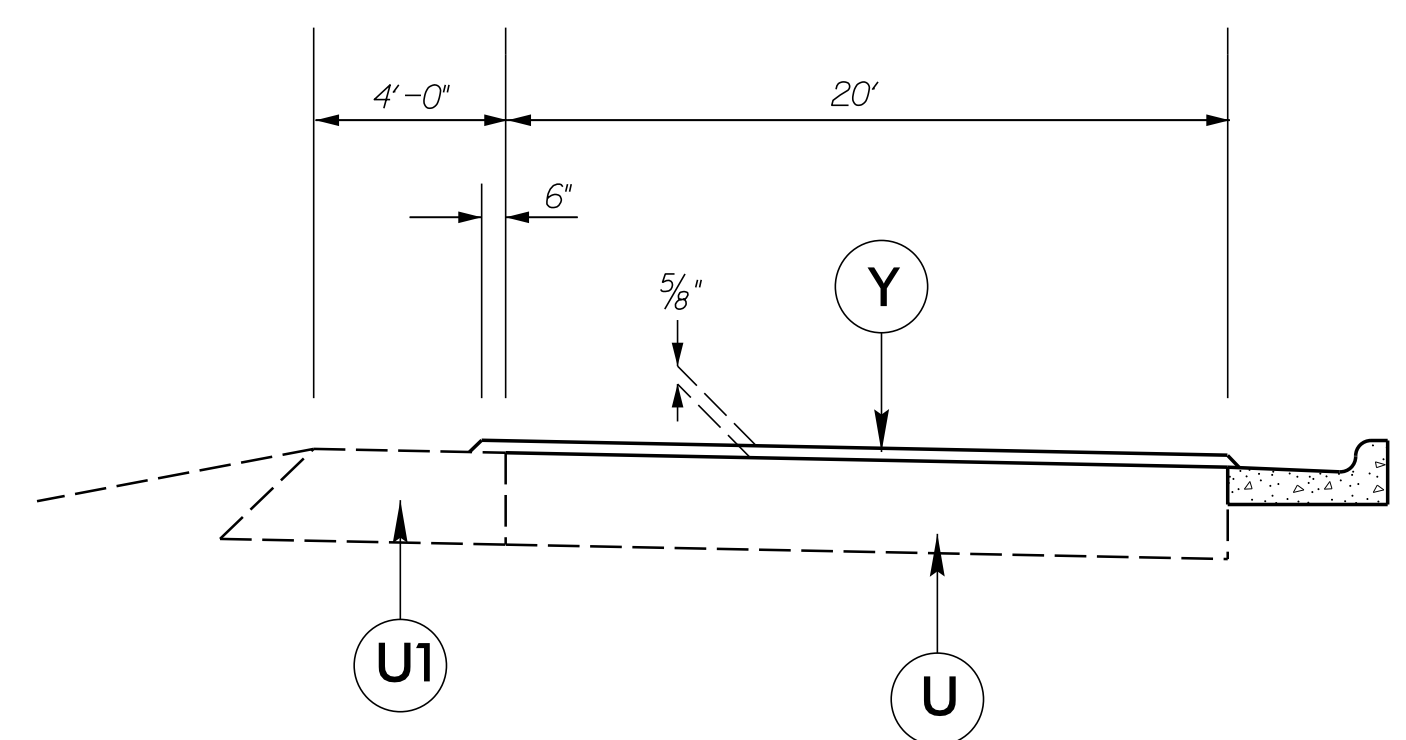

TYPICAL SECTION NO. 10


MAP 14 - EXIT 49A SB OFF-LOOP

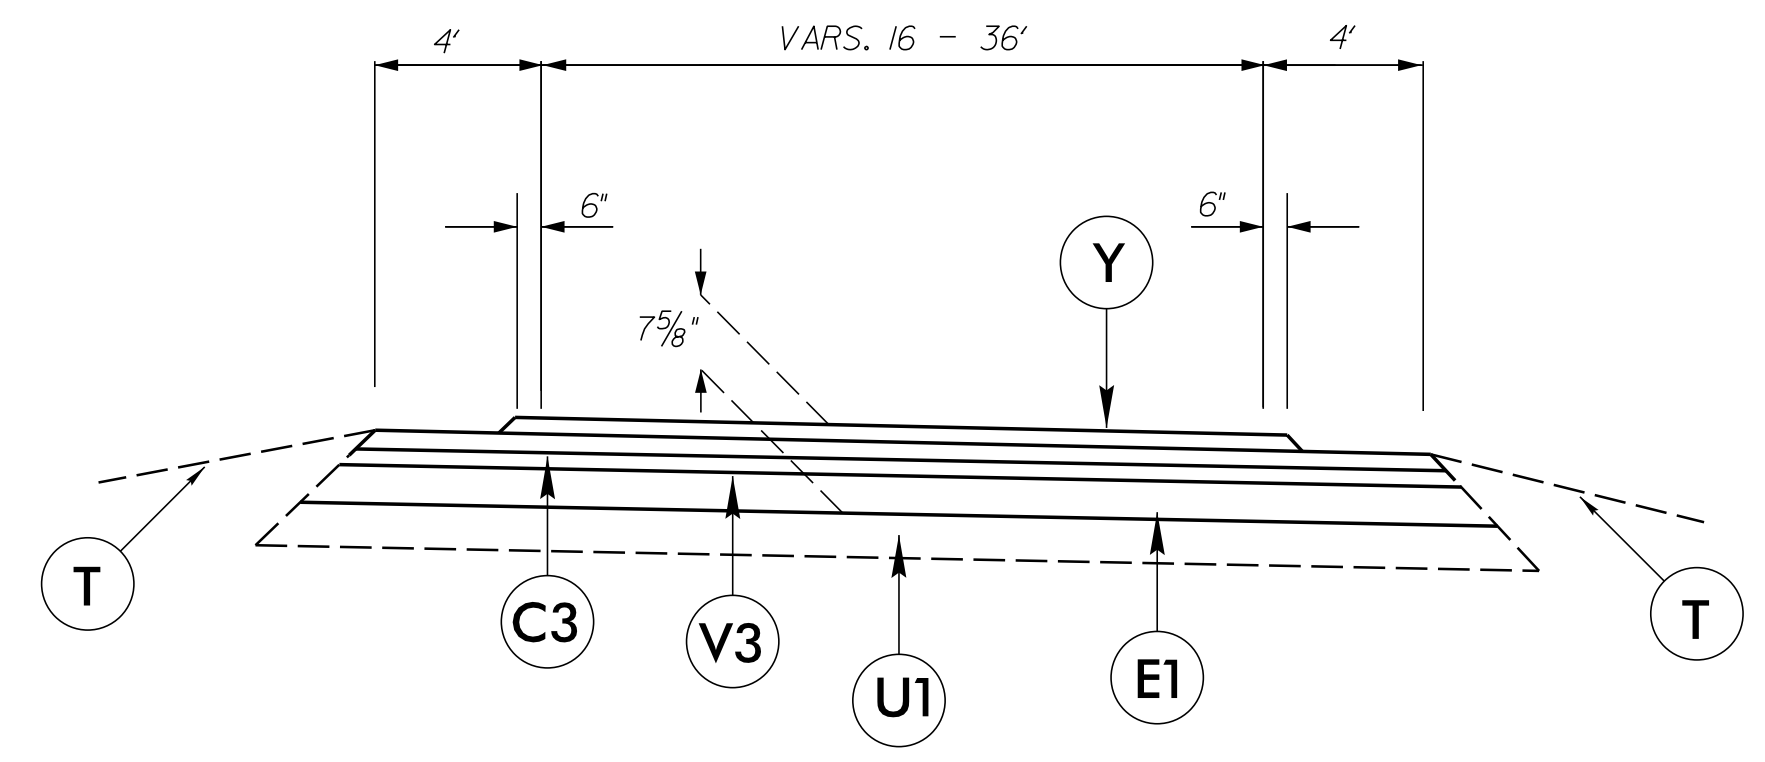

** Install pavement interlayer prior to placing base course or as directed.

TYPICAL SECTION NO. 12

MAP 5 - EXIT 42 SB ON-RAMP

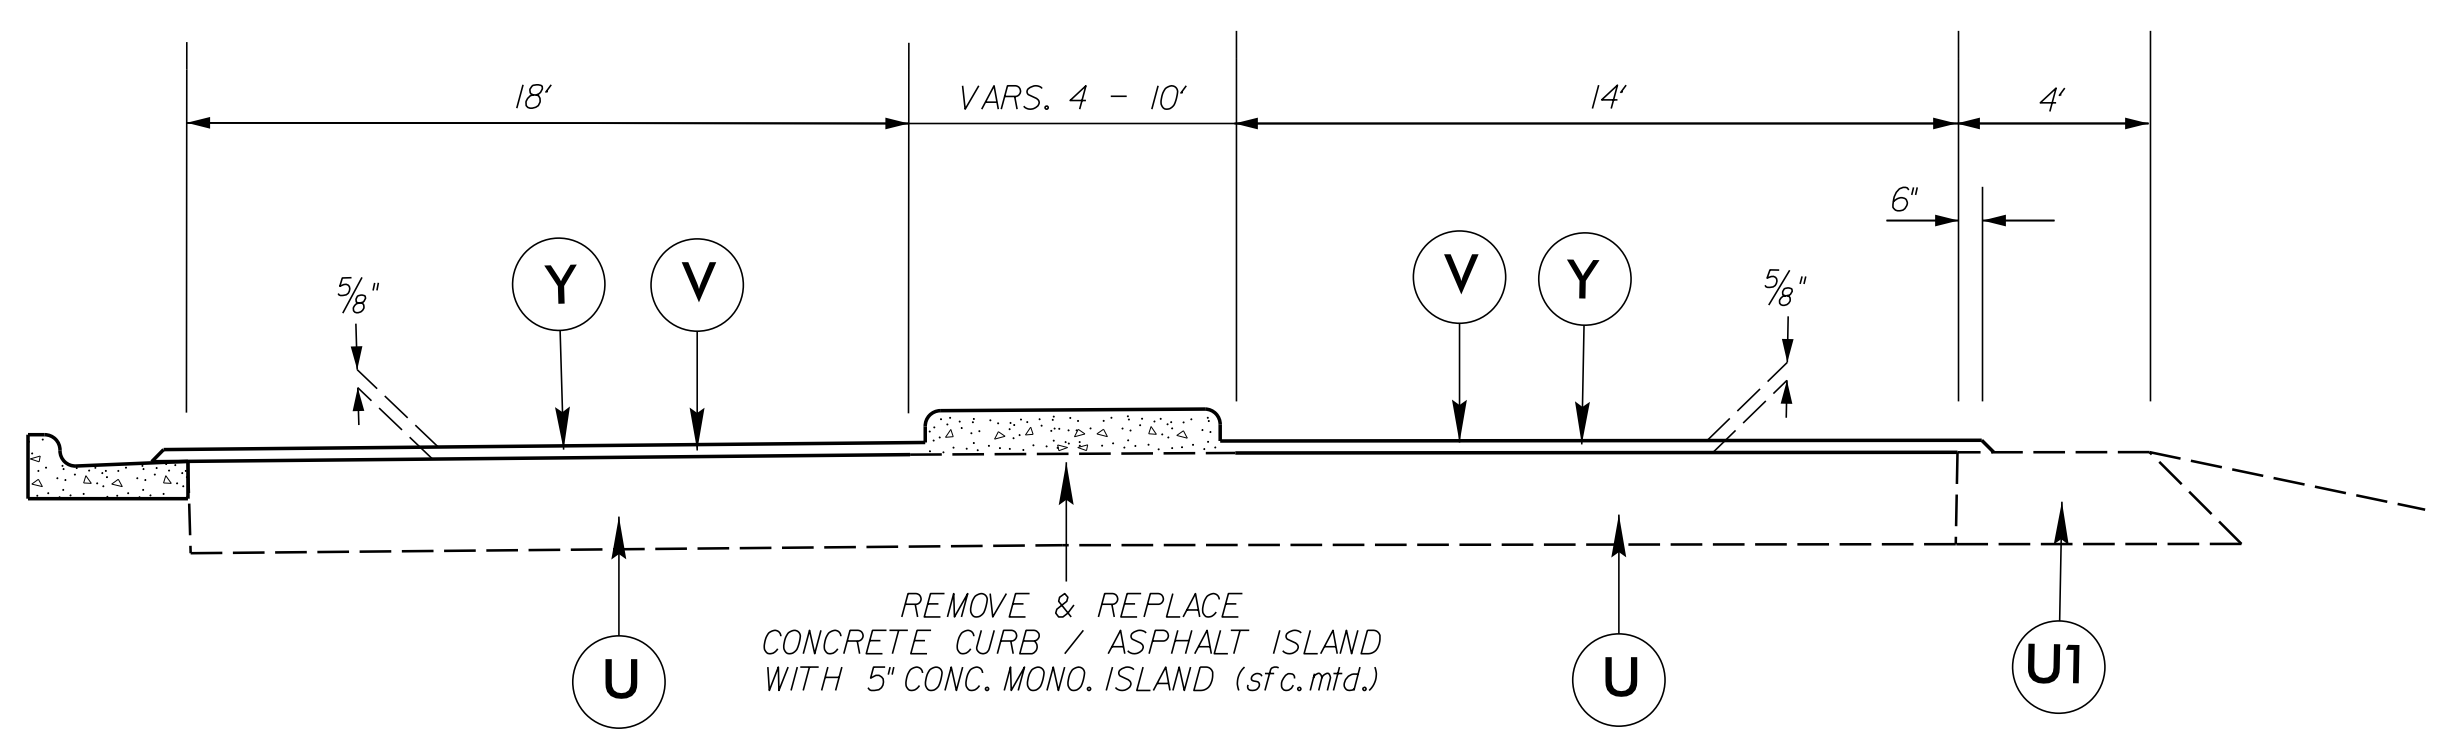

TYPICAL SECTION NO. 11

MAP 15 - EXIT 49B NB OFF-LOOP (STA 4+25 TO 8+75)

MAP 16 - EXIT 49B NB ON-RAMP (STA. 0+00 TO 4+50)

I:\JUN-2024\07\17\1705\1705.Dwg Details\1-5918 Final CADD Files\17_rdy_typicals_041824.dgn
 7 MM 31 JUN 2024 07:17:05