


### High Speed Detection (≥40 mph)

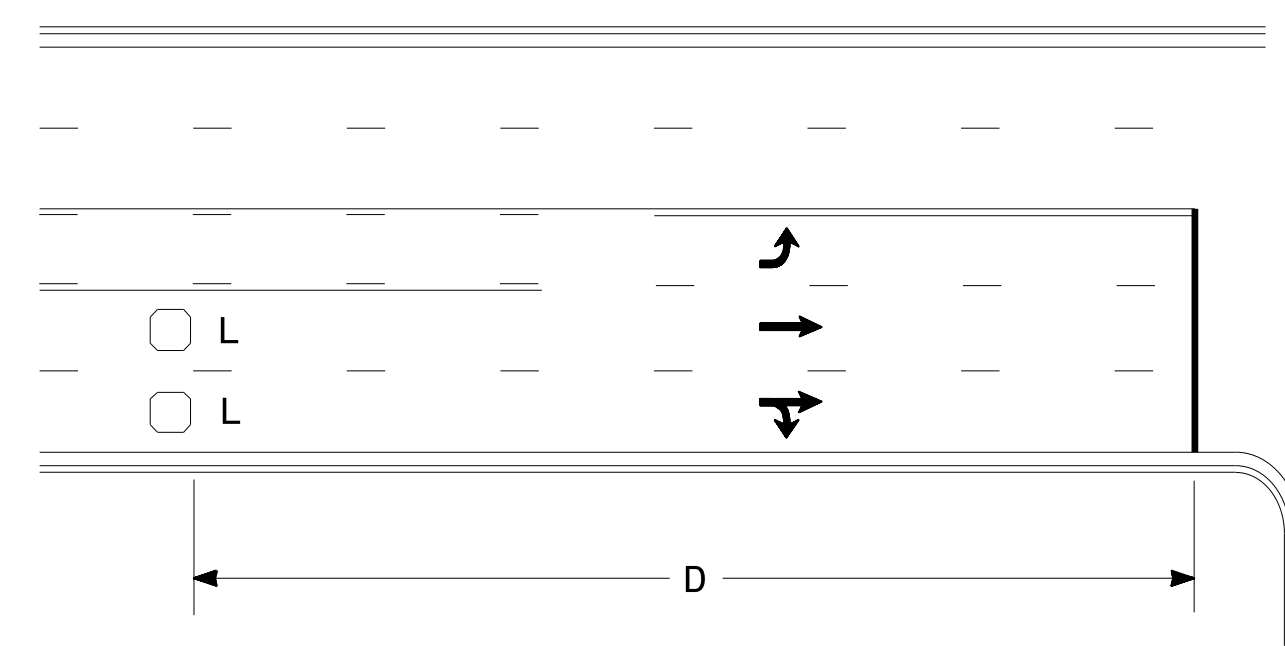


| Speed Limit<br>mph | D<br>ft |
|--------------------|---------|
| 40                 | 250     |
| 45                 | 300     |
| 50                 | 355     |
| 55                 | 420     |

L = 6ft X 6ft  
Wired separately

Volume Density Operation

OR

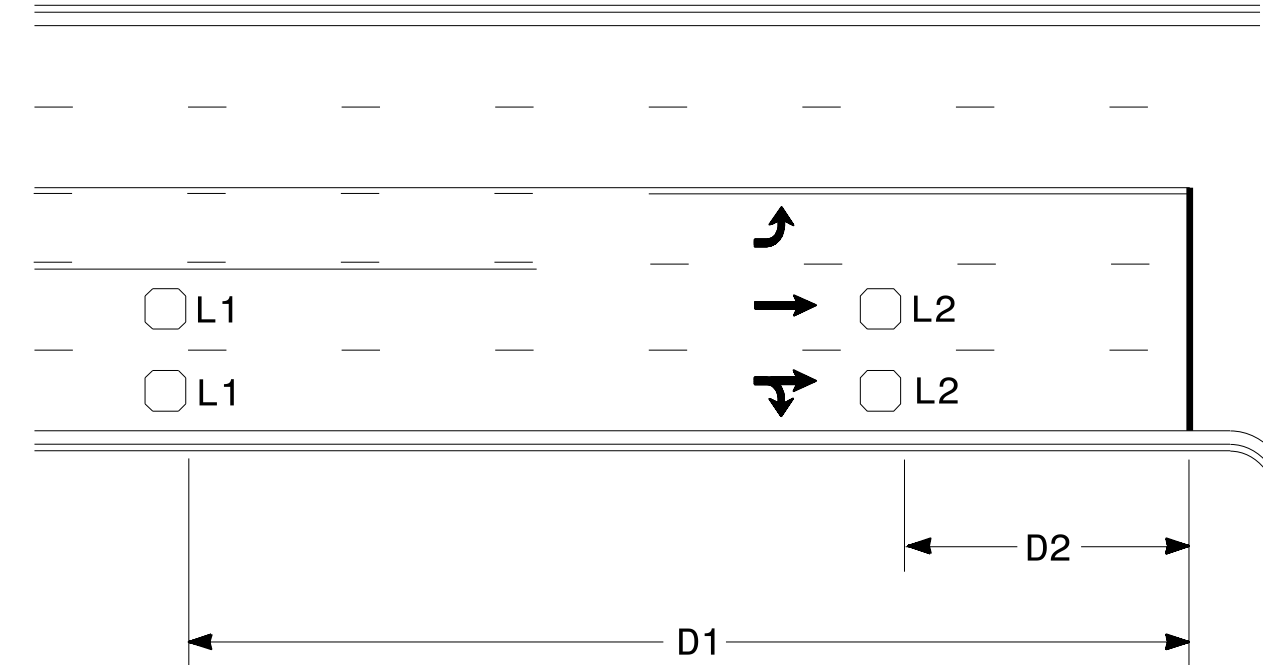


| Speed Limit<br>mph | D1<br>ft | D2<br>ft |
|--------------------|----------|----------|
| 40                 | 250      | 80       |
| 45                 | 300      | 90       |
| 50                 | 355      | 100      |
| 55                 | 420      | 110      |

L1 = 6ft X 6ft  
Wired in series

L2 = 6ft X 6ft  
Wired in series


"Stretch" Operation

### Low Speed Detection (≤35 mph)

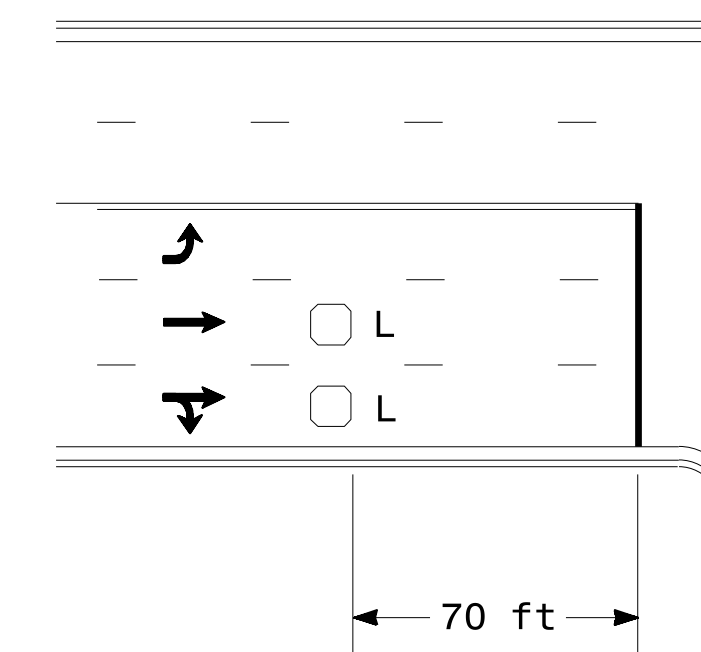


L = 6ft X 6ft  
Wired in series

OR

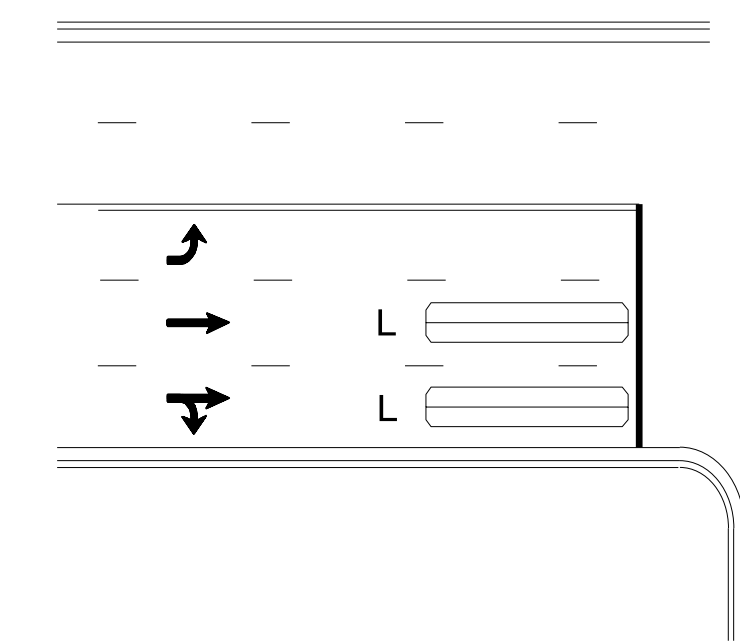

L = 6ft X 40ft  
Quadrupole loop, wired separately


### Left Turn Lane Detection

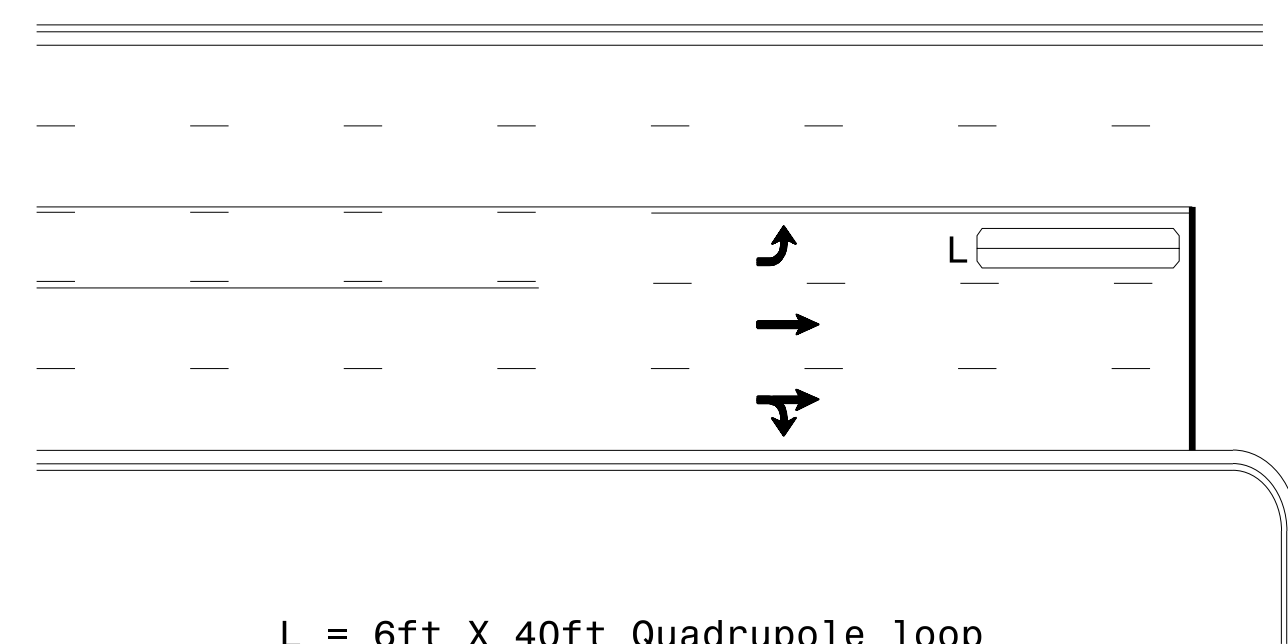

L = 6ft X 40ft Quadrupole loop

Presence Loop Detection


OR

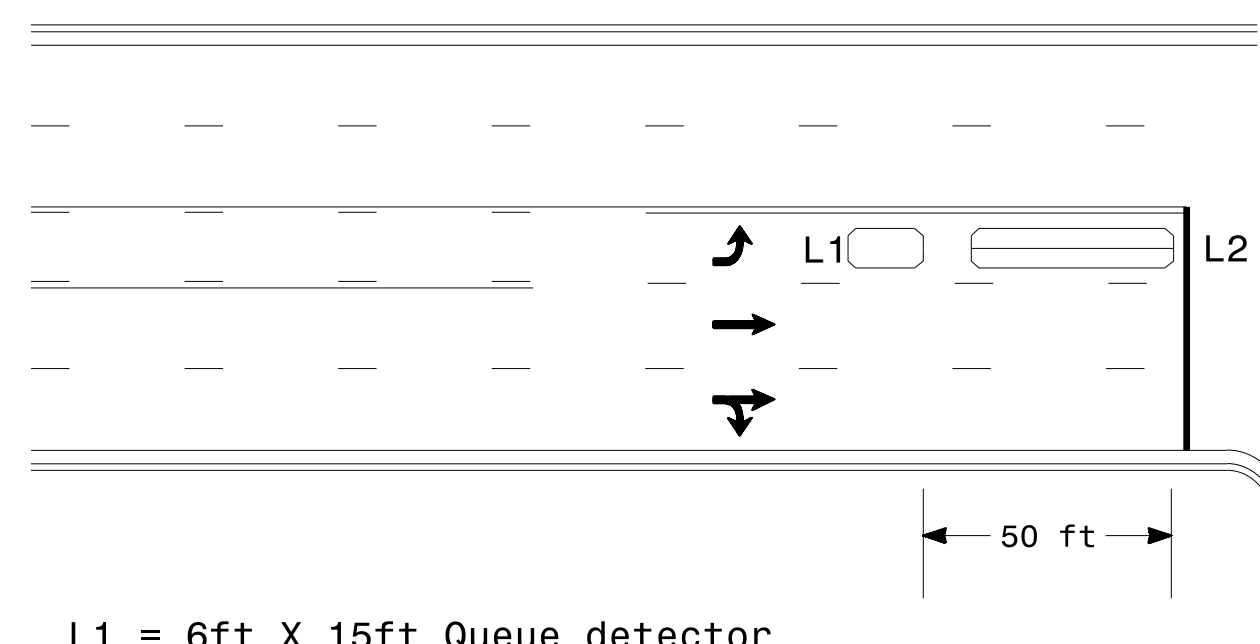

L1 = 6ft X 15ft Queue detector  
L2 = 6ft X 40ft Quadrupole loop


Queue Loop Detection

### Right Turn Lane Detection

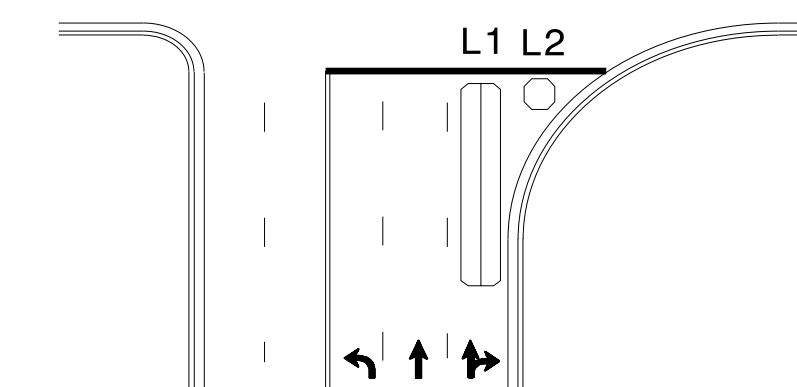


Shared Lane/  
Wide Radius Turn


L1 = 6ft X 40ft Quadrupole loop  
L2 = 6ft X 6ft [Minimum] Presence loop  
Wired separately

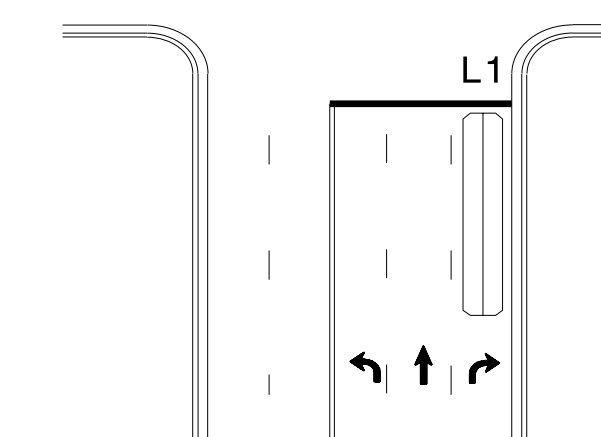

Standard Turn

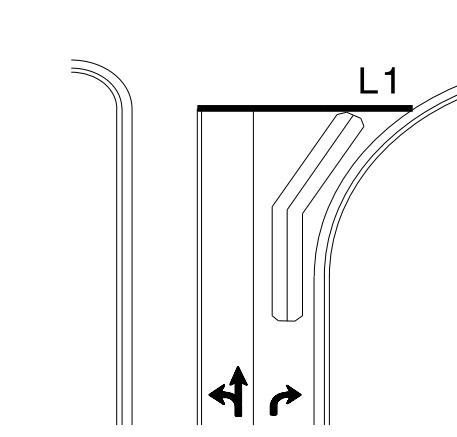


Wide Radius Turn

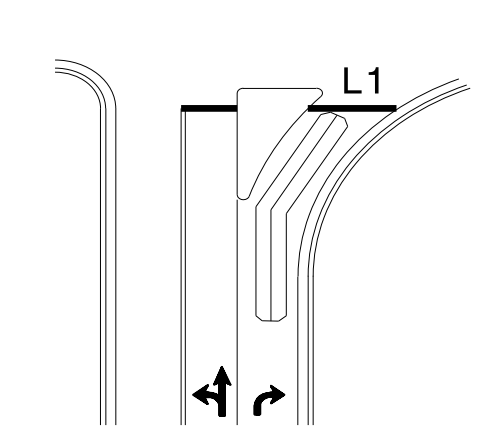


Channelized Turn

### Side Street Detection

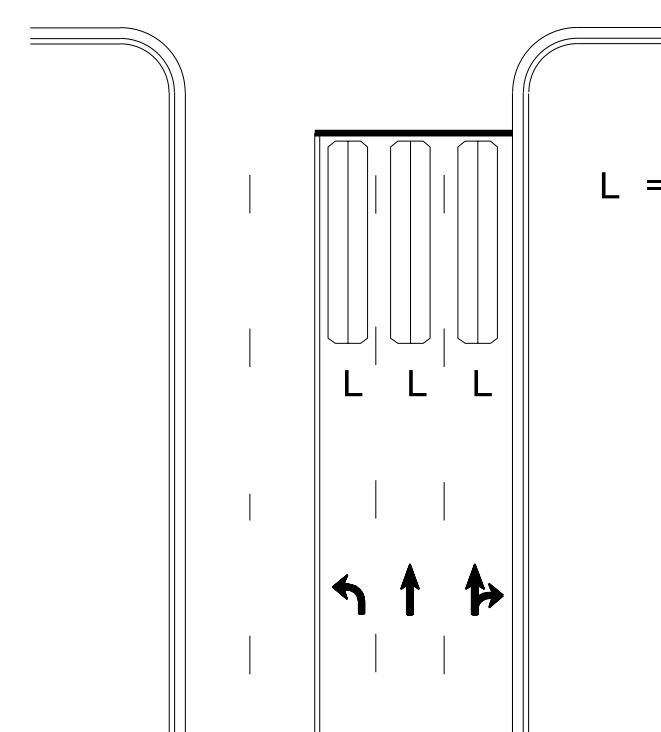

L = 6ft X 40ft  
Quadrupole loop  
Wired to separate  
detectors/channels

### Presence Loop Placement at Stop Lines

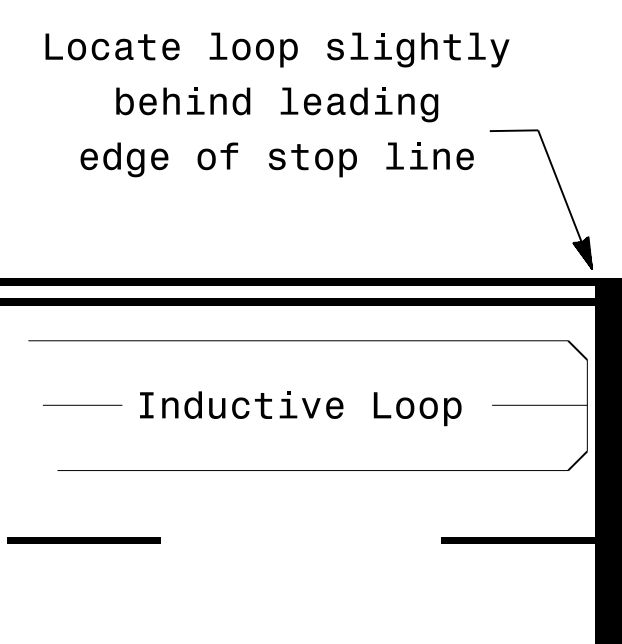

Locate loop slightly  
behind leading  
edge of stop line

Inductive Loop

#### Note:

- Loop may be located in advance of stop line under any of the following conditions:
- 1) stop line is greater than 15' from edge of intersecting roadway
  - 2) loop detects a permissive or protected/permissive left turn
  - 3) for an exclusive right turn lane

### Recommended Number of Turns

Single 6' X 6' loop  
(when wired separately):

| Length of<br>Lead-in<br>ft | Number<br>of Turns |
|----------------------------|--------------------|
| < 250                      | 3                  |
| 250-375                    | 4                  |
| 375-525                    | 5                  |
| > 525                      | 6                  |

Quadrupole loops: Use 2-4-2 turns

6' X 15' Loops:

- Lead-in < 150', use 2 turns
- Lead-in > 150', use 3 turns

|                      |  |              |  |   |
|----------------------|--|--------------|--|---|
|                      | <p>Prepared In the Offices of:</p> <p>TRANSPORTATION MOBILITY AND SAFETY DIVISION<br/>STATE OF NORTH CAROLINA<br/>SIGNAL DESIGN SECTION<br/>750 N. Greenfield Pkwy, Garner, NC 27529</p> |              | <p>SEAL<br/>NORTH CAROLINA<br/>PROFESSIONAL<br/>SEAL<br/>029904<br/>ENGINEER<br/>JASON P. GALLOWAY</p> |   |
|                      | <p>Typical Signal Loop Locations</p>   |              | <p>PLAN DATE: September 2020 REVIEWED BY: JPG</p> <p>PREPARED BY: PLA REVIEWED BY:</p>                 |   |
| <p>SCALE<br/>N/A</p> | <p>REVISIONS</p>   | <p>INIT.</p> | <p>DATE</p>  | <p>DocuSigned by:<br/>Jason P. Galloway 9/8/2020<br/>7705A7081841D<br/>DATE</p> |