


NOTES:

1. UNLESS OTHERWISE NOTED:
 -ATTACH NEW MESSENGER CABLE MINIMUM 40 INCHES BELOW POWER.
 -ATTACH ON FRONT SIDE (FS) OF POLE.
2. MAINTAIN A MINIMUM OF SIX (6) FEET FROM THE EDGE OF PAVEMENT WHEN TRENCHING PARALLEL TO THE ROADWAY.
3. TWO (2) WEEKS PRIOR TO BEGINNING WORK ON THE SIGNAL SYSTEM, CONTACT THE DEPUTY DIVISION TRAFFIC ENGINEER AT (910) 947-3930 TO ARRANGE FOR THE DIVISION TO PROGRAM THE NEW FIELD ETHERNET SWITCHES WITH THE NECESSARY NETWORK CONFIGURATION DATA, INCLUDING BUT NOT LIMITED TO: THE PROJECT IP ADDRESS, DEFAULT GATEWAY, SUBNET MASK AND VLAN ID INFORMATION.
4. NOTIFY THE DEPUTY DIVISION TRAFFIC ENGINEER AFTER ALL WORK IS PERFORMED TO ENSURE THAT ALL FIBER CIRCUITS ARE FUNCTIONING PROPERLY. WORK IS NOT COMPLETE UNTIL THE SIGNAL SYSTEM IS BACK UP AND FUNCTIONAL.
5. AFTER THE FIBER OPTIC CABLE CONSTRUCTION IS COMPLETE AND TRAFFIC IS IN THE FINAL PATTERN, REMOVE THE EXISTING WIRELESS ASSEMBLY AT SIN 08-0507 AND DELIVER TO THE DIVISION 8 TRAFFIC SERVICES.

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

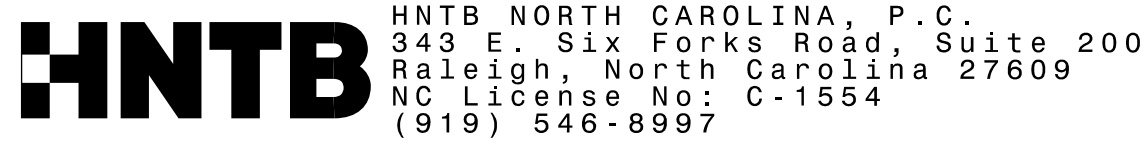

Final Design

Plans Prepared for:

259 N. Greenfield Place - Garner, NC 27529

SCALE
 0 50
 1"=50'

REVISIONS		INIT.	DATE

SEAL
 NORTH CAROLINA PROFESSIONAL ENGINEER
 SEAL 031464
 NATASHA R. SIMMONS

DocuSigned by:
 Natasha R. Simmons 5/21/2024

PREPARED BY: T.R. Terrell
 REVIEWED BY: J.A. Wagner
 REVIEWED BY: N.R. Simmons

CADD File name: U5813 SCP-04.dgn