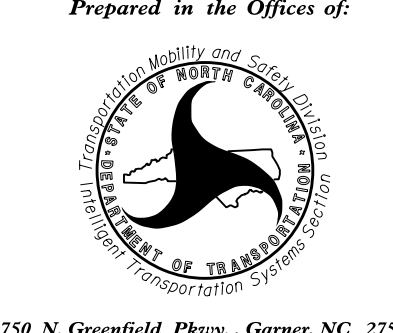
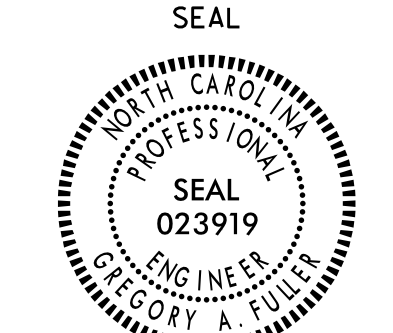


CONSTRUCTION NOTES:

- 1) REMOVE 6-FIBER DROP CABLE BETWEEN "AERIAL SPLICE ENCLOSURE #1" AND "SIGNAL CABINET GBO-006".
- 2) RE-TERMINATE REMAINING 12-FIBER CABLES IN "EXISTING AERIAL SPLICE ENCLOSURE #1" AS SHOWN IN SPLICE PLANS "TMP PHASE 2".
- 3) REMOVE ETHERNET EDGE SWITCH AND RETURN TO THE ENGINEER.

GENERAL NOTES:

- 1) NOTIFY THE CITY OF GREENSBORO TRANSPORTATION ENGINEER, JOE MULLINAX, AT (336) 373-2860; 5 DAYS PRIOR TO BEGINNING WORK ON THE SIGNAL SYSTEM COMMUNICATIONS CABLE. NOTIFY THE TRANSPORTATION ENGINEER AFTER ALL WORK IS PERFORMED TO ENSURE THAT ALL FIBER CIRCUITS ARE FUNCTIONING PROPERLY. ALL WORK IS NOT COMPLETE UNTIL THE SIGNAL SYSTEM IS BACK UP AND OPERATIONAL.

TMP PHASE 2		DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	
 <small>750 N. Greenfield Pkwy., Garner, NC 27529</small>	COMMUNICATIONS CABLE AND CONDUIT ROUTING PLANS		
	<small>DIVISION 07 GUILFORD COUNTY</small>		
<small>PLAN DATE: APRIL 2016</small>	<small>REVIEWED BY: <i>Gregory A. Fuller</i></small>	<small>DATE: 4/28/2016</small>	
<small>PREPARED BY: A. J. SKUCE</small>	<small>REVISIONS</small>	<small>INIT.</small>	<small>DATE</small>
<small>SCALE: 1" = 60'</small>		<small>CADD Filename:</small>	