
PROJECT REFERENCE NO. U-2524D

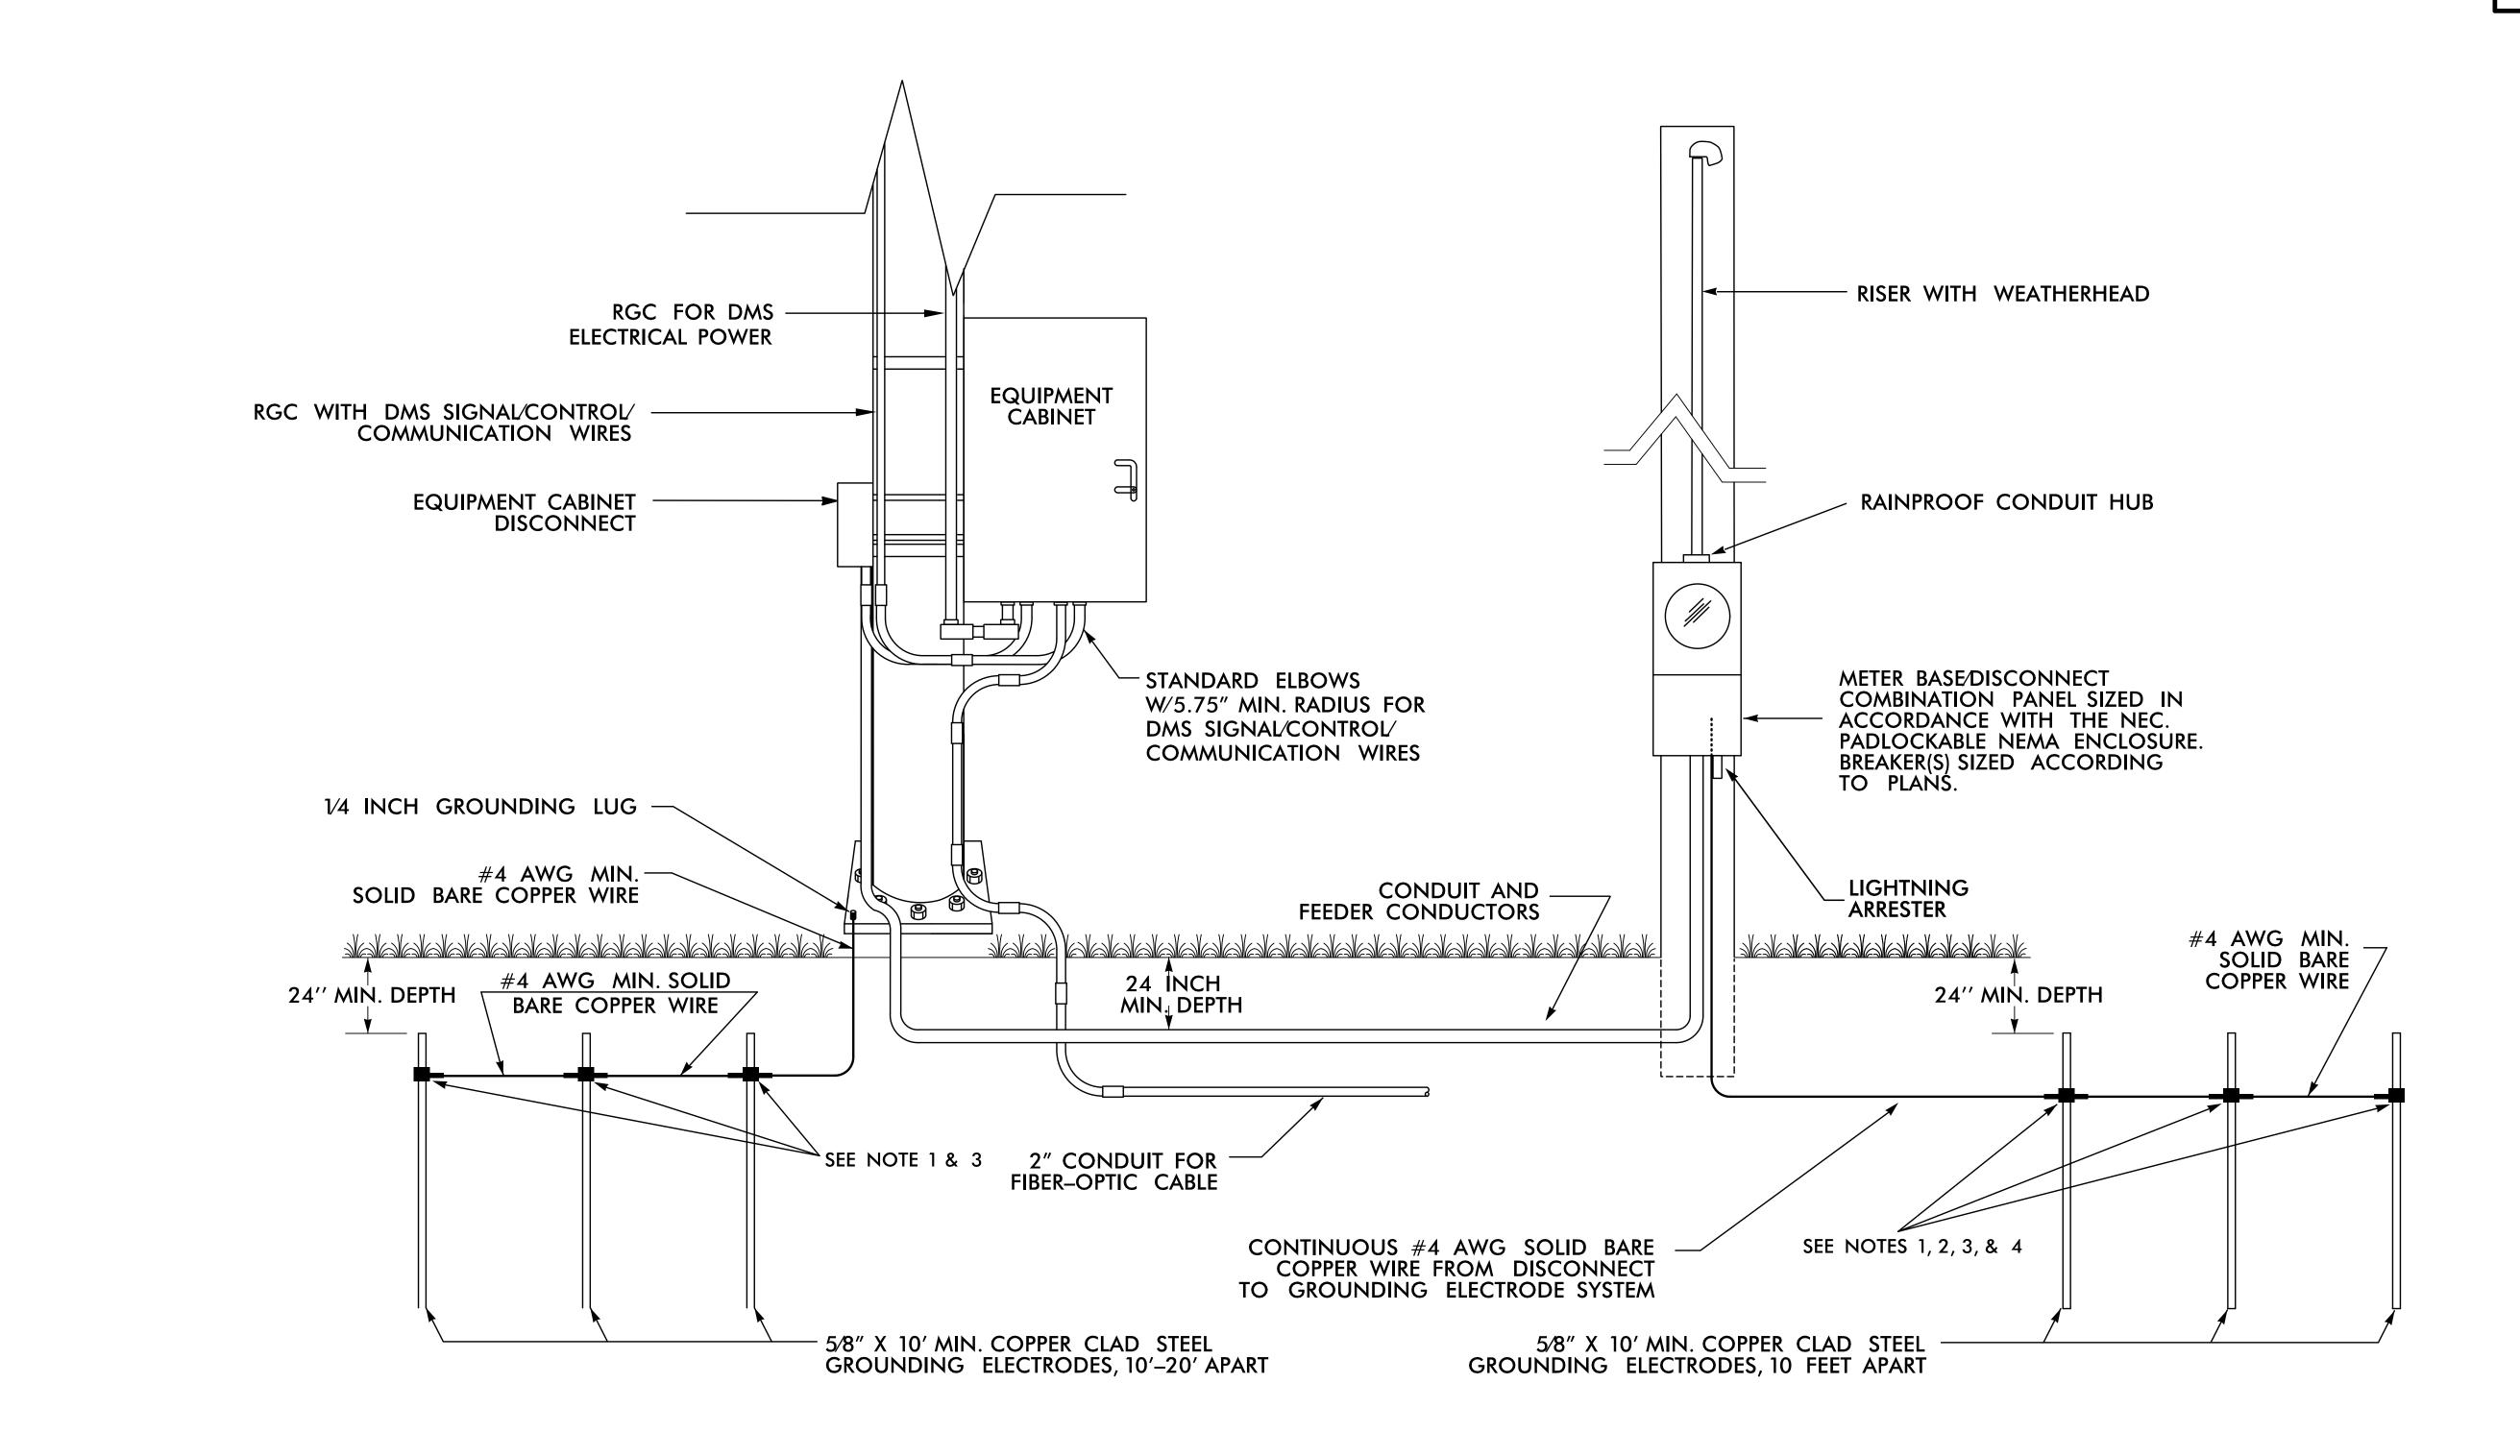


## **NOTES**

- 1. INSTALL A MINIMUM OF 3 GROUND RODS SPACED A MINIMUM OF 10 FEET APART. ENSURE THAT EXISTING UNDERGROUND FACILITIES ARE NOT DAMAGED DURING INSTALLATION.
- 2. TEST GROUNDING SYSTEM USING AN APPROVED METHOD. SYSTEM SHALL MEASURE TWENTY (20) OHMS OR LESS. ADDITIONAL GROUND RODS SHALL BE INSTALLED AS DIRECTED BY THE ENGINEER TO MEET THIS REQUIREMENT.
- 3. EXOTHERMICALLY WELD ALL CONNECTIONS TO GROUND RODS.
- 4. INSTALL MARKER TAPE DIRECTLY ABOVE ALL GROUNDING ELECTRODES AND CONDUCTORS AT A DEPTH OF 12 INCHES.
- 5. REMOVE BONDING JUMPER IN EQUIPMENT CABINET IF INSTALLED BETWEEN AC NEUTRAL AND EQUIPMENT GROUND.
- 6. BOND ALL RIGID GALVANIZED STEEL CONDUITS ENTERING THE CABINET TO EQUIPMENT GROUND.
- 7. INSTALL CONDUIT BETWEEN DISCONNECT AND CABINET.
- 8. ENSURE EQUIPMENT GROUND IS ELECTRICALLY BONDED TO EQUIPMENT CABINET.

HNTB NORTH CAROLINA, P.C.
343 E. Six Forks Road, Suite 200
Raleigh, North Carolina 27609
NC License No: C-1554

**DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED** 

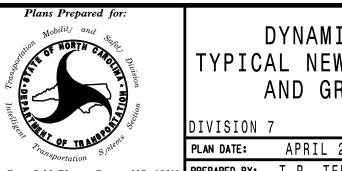

DYNAMIC MESSAGE SIGN TYPICAL NEW ELECTRICAL SERVICE AND GROUNDING DETAIL

GUILFORD CO. GREENSBORO PLAN DATE: APRIL 2016 REVIEWED BY: A.D. KLINKSIEK PREPARED BY: T.R. TERRELL REVIEWED BY: H.L. WINSTEAD

REVISIONS INIT. DATE

CADD Filename: U2524D ITS-07.da

Shing ESS