

REFERENCE: U-4713A

PROJECT: 39077.1.2

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT

STRUCTURE
SUBSURFACE INVESTIGATION

COUNTY MECKLENBURG
PROJECT DESCRIPTION SR 3440 (MCKEE ROAD) FROM
SR 3448 (PLEASANT PLAINS ROAD) TO
SR 1009 (EAST JOHN STREET)
SITE DESCRIPTION CULVERT ON SR 3440 (MCKEE
ROAD)

CONTENTS

| SHEET NO. | DESCRIPTION |
|-----------|----------------------|
| 1 | TITLE SHEET |
| 2 | LEGEND (SOIL & ROCK) |
| 3 | SITE PLAN |
| 4 | PROFILE |
| 5 | BORE LOGS |

| STATE | STATE PROJECT REFERENCE NO. | SHEET NO. | TOTAL SHEETS |
|-------|-----------------------------|-----------|--------------|
| N.C. | U-4713A | 1 | 4 |

CAUTION NOTICE

THE SUBSURFACE INFORMATION AND THE SUBSURFACE INVESTIGATION ON WHICH IT IS BASED WERE MADE FOR THE PURPOSE OF STUDY, PLANNING AND DESIGN, AND NOT FOR CONSTRUCTION OR PAY PURPOSES. THE VARIOUS FIELD BORING LOGS, ROCK CORES AND SOIL TEST DATA AVAILABLE MAY BE REVIEWED OR INSPECTED IN RALEIGH BY CONTACTING THE N. C. DEPARTMENT OF TRANSPORTATION, GEOTECHNICAL ENGINEERING UNIT AT 1919 T07-6850. THE SUBSURFACE PLANS AND REPORTS, FIELD BORING LOGS, ROCK CORES AND SOIL TEST DATA ARE NOT PART OF THE CONTRACT.

GENERAL SOIL AND ROCK STRATA DESCRIPTIONS AND INDICATED BOUNDARIES ARE BASED ON A GEOTECHNICAL INTERPRETATION OF ALL AVAILABLE SUBSURFACE DATA AND MAY NOT NECESSARILY REFLECT THE ACTUAL SUBSURFACE CONDITIONS BETWEEN BORINGS OR BETWEEN SAMPLED STRATA WITHIN THE BOREHOLE. THE LABORATORY SAMPLE DATA AND THE IN SITU (IN-PLACE) TEST DATA CAN BE RELIED ON ONLY TO THE DEGREE OF RELIABILITY INHERENT IN THE STANDARD TEST METHOD. THE OBSERVED WATER LEVELS OR SOIL MOISTURE CONDITIONS INDICATED IN THE SUBSURFACE INVESTIGATIONS ARE AS RECORDED AT THE TIME OF THE INVESTIGATION. THESE WATER LEVELS OR SOIL MOISTURE CONDITIONS MAY VARY CONSIDERABLY WITH TIME ACCORDING TO CLIMATIC CONDITIONS INCLUDING TEMPERATURES, PRECIPITATION AND WIND, AS WELL AS OTHER NON-CLIMATIC FACTORS.

THE BIDDER OR CONTRACTOR IS CAUTIONED THAT DETAILS SHOWN ON THE SUBSURFACE PLANS ARE PRELIMINARY ONLY AND IN MANY CASES THE FINAL DESIGN DETAILS ARE DIFFERENT. FOR BIDDING AND CONSTRUCTION PURPOSES, REFER TO THE CONSTRUCTION PLANS AND DOCUMENTS FOR FINAL DESIGN INFORMATION ON THIS PROJECT. THE DEPARTMENT DOES NOT WARRANT OR GUARANTEE THE SUFFICIENCY OR ACCURACY OF THE INVESTIGATION MADE, NOR THE INTERPRETATIONS MADE, OR OPINION OF THE DEPARTMENT AS TO THE TYPE OF MATERIALS AND CONDITIONS TO BE ENCOUNTERED. THE BIDDER OR CONTRACTOR IS CAUTIONED TO MAKE SUCH INDEPENDENT SUBSURFACE INVESTIGATIONS AS HE DEEMS NECESSARY TO SATISFY HIMSELF AS TO CONDITIONS TO BE ENCOUNTERED ON THE PROJECT. THE CONTRACTOR SHALL HAVE NO CLAIM FOR ADDITIONAL COMPENSATION OR FOR AN EXTENSION OF TIME FOR ANY REASON RESULTING FROM THE ACTUAL CONDITIONS ENCOUNTERED AT THE SITE DIFFERING FROM THOSE INDICATED IN THE SUBSURFACE INFORMATION.

- NOTES:
- THE INFORMATION CONTAINED HEREIN IS NOT IMPLIED OR GUARANTEED BY THE N. C. DEPARTMENT OF TRANSPORTATION AS ACCURATE NOR IS IT CONSIDERED PART OF THE PLANS, SPECIFICATIONS OR CONTRACT FOR THE PROJECT.
 - BY HAVING REQUESTED THIS INFORMATION, THE CONTRACTOR SPECIFICALLY WAIVES ANY CLAIMS FOR INCREASED COMPENSATION OR EXTENSION OF TIME BASED ON DIFFERENCES BETWEEN THE CONDITIONS INDICATED HEREIN AND THE ACTUAL CONDITIONS AT THE PROJECT SITE.

PERSONNEL

C.T. TANG, PE

S. WOODS

HPC

C. ODOM

G. MEDLIN

INVESTIGATED BY S. WOODS

DRAWN BY S. WOODS

CHECKED BY D. BROWN, PE

SUBMITTED BY C.T. TANG, PE

DATE AUGUST 2019



STEWART



DocuSigned by:
Chim-ting Tang
806B9478DA4C46E...

1/15/2020


SIGNATURE DATE

**DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED**


NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT
SUBSURFACE INVESTIGATION
SOIL AND ROCK LEGEND, TERMS, SYMBOLS, AND ABBREVIATIONS

| SOIL DESCRIPTION | | | | | | | | | | GRADATION | | | | | | | | | | ROCK DESCRIPTION | | | | | | | | | | TERMS AND DEFINITIONS | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|--|---|--|-------------------------|-------------------------|--|-------------------------|-------------------------|-------------------------|--|--|--|--|--|---|--|-------------|---|--|---|--|---|-------------------|--|---|------------------|------------------------|-------------------|----------------|--|---------------------|---|----------------|-------------------------|--------|----------|---------------|-----------------------|--------|---------|-----------------|--------------------|------------|---------------------|---------------|----------------|--------------|---------------|----------------------|--|------------------|-------------------|-------------------|--|--------------|------------|------------|------------------------|-------------------|-------------|-------------------|-------------------------|-------------------------|---|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|----------------------------|--------|------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------|---|---|---|------|------|-------|-------|-------|--|--|--|--|--|--|--|--------------------------------|-------------------------------|-----------|---------------------------------|-------------|--------------|--|--|--|--|--|--|--|--|--|--|-------------------------|-------------------|--|--|--|--|--------------|--|--|--|--|--------------|------|-------------|---|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|---|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|---|--|--|--|--|--|--|--|--|--|
| <p>SOIL IS CONSIDERED UNCONSOLIDATED, SEMI-CONSOLIDATED, OR WEATHERED EARTH MATERIALS THAT CAN BE PENETRATED WITH A CONTINUOUS FLIGHT POWER AUGER AND YIELD LESS THAN 100 BLOWS PER FOOT ACCORDING TO THE STANDARD PENETRATION TEST (AASHTO T 208, ASTM D1586). SOIL CLASSIFICATION IS BASED ON THE AASHTO SYSTEM. BASIC DESCRIPTIONS GENERALLY INCLUDE THE FOLLOWING: CONSISTENCY, COLOR, TEXTURE, MOISTURE, AASHTO CLASSIFICATION, AND OTHER PERTINENT FACTORS SUCH AS MINERALOGICAL COMPOSITION, ANGULARITY, STRUCTURE, PLASTICITY, ETC. FOR EXAMPLE, <i>VERY STIFF, GRAY, SILTY CLAY, MOIST WITH INTERBEDDED FINE SAND LAYERS, HIGHLY PLASTIC, A-7-6</i></p> | | | | | | | | | | <p>WELL GRADED - INDICATES A GOOD REPRESENTATION OF PARTICLE SIZES FROM FINE TO COARSE. UNIFORMLY GRADED - INDICATES THAT SOIL PARTICLES ARE ALL APPROXIMATELY THE SAME SIZE. GAP-GRADED - INDICATES A MIXTURE OF UNIFORM PARTICLE SIZES OF TWO OR MORE SIZES.</p> | | | | | | | | | | <p>HARD ROCK IS NON-COASTAL PLAIN MATERIAL THAT WOULD YIELD SPT REFUSAL IF TESTED, AN INFERRED ROCK LINE INDICATES THE LEVEL AT WHICH NON-COASTAL PLAIN MATERIAL WOULD YIELD SPT REFUSAL, SPT REFUSAL IS PENETRATION BY A SPLIT SPOON SAMPLER EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS IN NON-COASTAL PLAIN MATERIAL. THE TRANSITION BETWEEN SOIL AND ROCK IS OFTEN REPRESENTED BY A ZONE OF WEATHERED ROCK. ROCK MATERIALS ARE TYPICALLY DIVIDED AS FOLLOWS:</p> | | | | | | | | | | <p>ALLUVIUM (ALLUV.) - SOILS THAT HAVE BEEN TRANSPORTED BY WATER. AQUIFER - A WATER BEARING FORMATION OR STRATA. ARENACEOUS - APPLIED TO ROCKS THAT HAVE BEEN DERIVED FROM SAND OR THAT CONTAIN SAND. ARGILLACEOUS - APPLIED TO ALL ROCKS OR SUBSTANCES COMPOSED OF CLAY MINERALS, OR HAVING A NOTABLE PROPORTION OF CLAY IN THEIR COMPOSITION, SUCH AS SHALE, SLATE, ETC. ARTESIAN - GROUND WATER THAT IS UNDER SUFFICIENT PRESSURE TO RISE ABOVE THE LEVEL AT WHICH IT IS ENCOUNTERED, BUT WHICH DOES NOT NECESSARILY RISE TO OR ABOVE THE GROUND SURFACE. CALCAREOUS (CALC.) - SOILS THAT CONTAIN APPRECIABLE AMOUNTS OF CALCIUM CARBONATE. COLLUVIUM - ROCK FRAGMENTS MIXED WITH SOIL DEPOSITED BY GRAVITY ON SLOPE OR AT BOTTOM OF SLOPE. CORE RECOVERY (REC.) - TOTAL LENGTH OF ALL MATERIAL RECOVERED IN THE CORE BARREL DIVIDED BY TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. DIKE - A TABULAR BODY OF IGNEOUS ROCK THAT CUTS ACROSS THE STRUCTURE OF ADJACENT ROCKS OR CUTS MASSIVE ROCK. DIP - THE ANGLE AT WHICH A STRATUM OR ANY PLANAR FEATURE IS INCLINED FROM THE HORIZONTAL. DIP DIRECTION (DIP AZIMUTH) - THE DIRECTION OR BEARING OF THE HORIZONTAL TRACE OF THE LINE OF DIP, MEASURED CLOCKWISE FROM NORTH. FAULT - A FRACTURE OR FRACTURE ZONE ALONG WHICH THERE HAS BEEN DISPLACEMENT OF THE SIDES RELATIVE TO ONE ANOTHER PARALLEL TO THE FRACTURE. FISSILE - A PROPERTY OF SPLITTING ALONG CLOSELY SPACED PARALLEL PLANES. FLOAT - ROCK FRAGMENTS ON SURFACE NEAR THEIR ORIGINAL POSITION AND DISLOADED FROM PARENT MATERIAL. FLOOD PLAIN (FP) - LAND BORDERING A STREAM, BUILT OF SEDIMENTS DEPOSITED BY THE STREAM. FORMATION (FM) - A MAPPABLE GEOLOGIC UNIT THAT CAN BE RECOGNIZED AND TRACED IN THE FIELD. JOINT - FRACTURE IN ROCK ALONG WHICH NO APPRECIABLE MOVEMENT HAS OCCURRED. LEDGE - A SHELF-LIKE RIDGE OR PROJECTION OF ROCK WHOSE THICKNESS IS SMALL COMPARED TO ITS LATERAL EXTENT. LENS - A BODY OF SOIL OR ROCK THAT THINS OUT IN ONE OR MORE DIRECTIONS. MOTTLED (MOT.) - IRREGULARLY MARKED WITH SPOTS OF DIFFERENT COLORS. MOTTLING IN SOILS USUALLY INDICATES POOR AERATION AND LACK OF GOOD DRAINAGE. PERCHED WATER - WATER MAINTAINED ABOVE THE NORMAL GROUND WATER LEVEL BY THE PRESENCE OF AN INTERVENING IMPERVIOUS STRATUM. RESIDUAL (RES.) SOIL - SOIL FORMED IN PLACE BY THE WEATHERING OF ROCK. ROCK QUALITY DESIGNATION (RQD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. SAPROLITE (SAP.) - RESIDUAL SOIL THAT RETAINS THE RELIC STRUCTURE OR FABRIC OF THE PARENT ROCK. SILL - AN INTRUSIVE BODY OF IGNEOUS ROCK OF APPROXIMATELY UNIFORM THICKNESS AND RELATIVELY THIN COMPARED WITH ITS LATERAL EXTENT, THAT HAS BEEN EMPLACED PARALLEL TO THE BEDDING OR SCHISTOSITY OF THE INTRUDED ROCKS. SLICKENSIDE - POLISHED AND STRIATED SURFACE THAT RESULTS FROM FRICTION ALONG A FAULT OR SLIP PLANE. STANDARD PENETRATION TEST (PENETRATION RESISTANCE) (SPT) - NUMBER OF BLOWS (N OR BPF) OF A 140 LB. HAMMER FALLING 30 INCHES REQUIRED TO PRODUCE A PENETRATION OF 1 FOOT INTO SOIL WITH A 2 INCH OUTSIDE DIAMETER SPLIT SPOON SAMPLER. SPT REFUSAL IS PENETRATION EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS. STRATA CORE RECOVERY (SREC.) - TOTAL LENGTH OF STRATA MATERIAL RECOVERED DIVIDED BY TOTAL LENGTH OF STRATUM AND EXPRESSED AS A PERCENTAGE. STRATA ROCK QUALITY DESIGNATION (SROD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS WITHIN A STRATUM EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF STRATA AND EXPRESSED AS A PERCENTAGE. TOPSOIL (TS.) - SURFACE SOILS USUALLY CONTAINING ORGANIC MATTER.</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>SOIL LEGEND AND AASHTO CLASSIFICATION</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>GENERAL CLASS.</th> <th colspan="5">GRANULAR MATERIALS (<= 35% PASSING #200)</th> <th colspan="5">SILT-CLAY MATERIALS (> 35% PASSING #200)</th> <th colspan="5">ORGANIC MATERIALS</th> </tr> <tr> <th>GROUP CLASS.</th> <th>A-1</th> <th>A-3</th> <th>A-2</th> <th>A-4</th> <th>A-5</th> <th>A-6</th> <th>A-7</th> <th>A-1, A-2</th> <th>A-3</th> <th>A-4, A-5</th> <th>A-6, A-7</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>SYMBOL</th> <td style="text-align: center;">○○○○○○○○○○</td> <td style="text-align: center;">○○○○○○○○○○</td> <td style="text-align: center;">○○○○○○○○○○</td> <td style="text-align: center;">○○○○○○○○○○</td> <td style="text-align: center;">○○○○○○○○○○</td> <td style="text-align: center;">○○○○○○○○○○</td> <td style="text-align: center;">○○○○○○○○○○</td> <td style="text-align: center;">○○○○○○○○○○</td> <td style="text-align: center;">○○○○○○○○○○</td> <td style="text-align: center;">○○○○○○○○○○</td> <td style="text-align: center;">○○○○○○○○○○</td> <td style="text-align: center;">○○○○○○○○○○</td> <td style="text-align: center;">○○○○○○○○○○</td> <td style="text-align: center;">○○○○○○○○○○</td> <td style="text-align: center;">○○○○○○○○○○</td> </tr> <tr> <th>% PASSING #10 #40 #200</th> <td>50 MX 30 MX 15 MX</td> <td>50 MX 25 MX</td> <td>51 MN 35 MX 35 MX</td> <td>40 MX 41 MN 10 MX 11 MN</td> <td>40 MX 41 MN 10 MX 11 MN</td> <td>40 MX 41 MN 10 MX 11 MN</td> <td>40 MX 41 MN 10 MX 11 MN</td> <td>40 MX 41 MN 10 MX 11 MN</td> <td>40 MX 41 MN 10 MX 11 MN</td> <td>40 MX 41 MN 10 MX 11 MN</td> <td>40 MX 41 MN 10 MX 11 MN</td> <td>40 MX 41 MN 10 MX 11 MN</td> <td>40 MX 41 MN 10 MX 11 MN</td> <td>40 MX 41 MN 10 MX 11 MN</td> <td>40 MX 41 MN 10 MX 11 MN</td> </tr> <tr> <th>MATERIAL PASSING #40 LL PI</th> <td>- 6 MX</td> <td>- NP</td> <td>40 MX 41 MN 10 MX 11 MN</td> <td>40 MX 41 MN 10 MX 11 MN</td> <td>40 MX 41 MN 10 MX 11 MN</td> <td>40 MX 41 MN 10 MX 11 MN</td> <td>40 MX 41 MN 10 MX 11 MN</td> <td>40 MX 41 MN 10 MX 11 MN</td> <td>40 MX 41 MN 10 MX 11 MN</td> <td>40 MX 41 MN 10 MX 11 MN</td> <td>40 MX 41 MN 10 MX 11 MN</td> <td>40 MX 41 MN 10 MX 11 MN</td> <td>40 MX 41 MN 10 MX 11 MN</td> <td>40 MX 41 MN 10 MX 11 MN</td> <td>40 MX 41 MN 10 MX 11 MN</td> </tr> <tr> <th>GROUP INDEX</th> <td>0</td> <td>0</td> <td>0</td> <td>4 MX</td> <td>8 MX</td> <td>12 MX</td> <td>16 MX</td> <td>NO MX</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <th>USUAL TYPES OF MAJOR MATERIALS</th> <td>STONE FRAGS. GRAVEL, AND SAND</td> <td>FINE SAND</td> <td>SILTY OR CLAYEY GRAVEL AND SAND</td> <td>SILTY SOILS</td> <td>CLAYEY SOILS</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <th>GEN. RATING AS SUBGRADE</th> <td colspan="5">EXCELLENT TO GOOD</td> <td colspan="5">FAIR TO POOR</td> <td>FAIR TO POOR</td> <td>POOR</td> <td>UNSATURABLE</td> </tr> <tr> <td colspan="10">PI OF A-7-5 SUBGROUP IS ≤ LL - 30 ; PI OF A-7-6 SUBGROUP IS > LL - 30</td> <td colspan="5"></td> <td colspan="5"></td> </tr> </table> | | | | | | | | | | GENERAL CLASS. | GRANULAR MATERIALS (<= 35% PASSING #200) | | | | | SILT-CLAY MATERIALS (> 35% PASSING #200) | | | | | ORGANIC MATERIALS | | | | | GROUP CLASS. | A-1 | A-3 | A-2 | A-4 | A-5 | A-6 | A-7 | A-1, A-2 | A-3 | A-4, A-5 | A-6, A-7 | | | | | SYMBOL | ○○○○○○○○○○ | ○○○○○○○○○○ | ○○○○○○○○○○ | ○○○○○○○○○○ | ○○○○○○○○○○ | ○○○○○○○○○○ | ○○○○○○○○○○ | ○○○○○○○○○○ | ○○○○○○○○○○ | ○○○○○○○○○○ | ○○○○○○○○○○ | ○○○○○○○○○○ | ○○○○○○○○○○ | ○○○○○○○○○○ | ○○○○○○○○○○ | % PASSING #10 #40 #200 | 50 MX 30 MX 15 MX | 50 MX 25 MX | 51 MN 35 MX 35 MX | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | MATERIAL PASSING #40 LL PI | - 6 MX | - NP | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | GROUP INDEX | 0 | 0 | 0 | 4 MX | 8 MX | 12 MX | 16 MX | NO MX | | | | | | | | USUAL TYPES OF MAJOR MATERIALS | STONE FRAGS. GRAVEL, AND SAND | FINE SAND | SILTY OR CLAYEY GRAVEL AND SAND | SILTY SOILS | CLAYEY SOILS | | | | | | | | | | | GEN. RATING AS SUBGRADE | EXCELLENT TO GOOD | | | | | FAIR TO POOR | | | | | FAIR TO POOR | POOR | UNSATURABLE | PI OF A-7-5 SUBGROUP IS ≤ LL - 30 ; PI OF A-7-6 SUBGROUP IS > LL - 30 | | | | | | | | | | | | | | | | | | | | <p>ANGULARITY OF GRAINS</p> <p>THE ANGULARITY OR ROUNDNESS OF SOIL GRAINS IS DESIGNATED BY THE TERMS: ANGULAR, SUBANGULAR, SUBROUNDED, OR ROUNDED.</p> | | | | | | | | | | <p>WEATHERED ROCK (WR)</p> <p>CRYSTALLINE ROCK (CR)</p> <p>NON-CRYSTALLINE ROCK (NCR)</p> <p>COASTAL PLAIN SEDIMENTARY ROCK (CP)</p> | | | | | | | | | | <p>WEATHERING</p> <p>FRESH</p> <p>VERY SLIGHT (V SL.)</p> <p>SLIGHT (SL.)</p> <p>MODERATE (MOD.)</p> <p>MODERATELY SEVERE (MOD. SEV.)</p> <p>SEVERE (SEV.)</p> <p>VERY SEVERE (V SEV.)</p> <p>COMPLETE</p> | | | | | | | | | |
| GENERAL CLASS. | GRANULAR MATERIALS (<= 35% PASSING #200) | | | | | SILT-CLAY MATERIALS (> 35% PASSING #200) | | | | | ORGANIC MATERIALS | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GROUP CLASS. | A-1 | A-3 | A-2 | A-4 | A-5 | A-6 | A-7 | A-1, A-2 | A-3 | A-4, A-5 | A-6, A-7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SYMBOL | ○○○○○○○○○○ | ○○○○○○○○○○ | ○○○○○○○○○○ | ○○○○○○○○○○ | ○○○○○○○○○○ | ○○○○○○○○○○ | ○○○○○○○○○○ | ○○○○○○○○○○ | ○○○○○○○○○○ | ○○○○○○○○○○ | ○○○○○○○○○○ | ○○○○○○○○○○ | ○○○○○○○○○○ | ○○○○○○○○○○ | ○○○○○○○○○○ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| % PASSING #10 #40 #200 | 50 MX 30 MX 15 MX | 50 MX 25 MX | 51 MN 35 MX 35 MX | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MATERIAL PASSING #40 LL PI | - 6 MX | - NP | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | 40 MX 41 MN 10 MX 11 MN | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GROUP INDEX | 0 | 0 | 0 | 4 MX | 8 MX | 12 MX | 16 MX | NO MX | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| USUAL TYPES OF MAJOR MATERIALS | STONE FRAGS. GRAVEL, AND SAND | FINE SAND | SILTY OR CLAYEY GRAVEL AND SAND | SILTY SOILS | CLAYEY SOILS | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GEN. RATING AS SUBGRADE | EXCELLENT TO GOOD | | | | | FAIR TO POOR | | | | | FAIR TO POOR | POOR | UNSATURABLE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| PI OF A-7-5 SUBGROUP IS ≤ LL - 30 ; PI OF A-7-6 SUBGROUP IS > LL - 30 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>MINERALOGICAL COMPOSITION</p> <p>MINERAL NAMES SUCH AS QUARTZ, FELDSPAR, MICA, TALC, KAOLIN, ETC. ARE USED IN DESCRIPTIONS WHEN THEY ARE CONSIDERED OF SIGNIFICANCE.</p> | | | | | | | | | | <p>COMPRESSION</p> <p>SLIGHTLY COMPRESSIBLE LL < 31 MODERATELY COMPRESSIBLE LL = 31 - 50 HIGHLY COMPRESSIBLE LL > 50</p> | | | | | | | | | | <p>PERCENTAGE OF MATERIAL</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>ORGANIC MATERIAL</th> <th>GRANULAR SOILS</th> <th>SILT - CLAY SOILS</th> <th>OTHER MATERIAL</th> </tr> <tr> <td>TRACE OF ORGANIC MATTER</td> <td>2 - 3%</td> <td>3 - 5%</td> <td>TRACE 1 - 10%</td> </tr> <tr> <td>LITTLE ORGANIC MATTER</td> <td>3 - 5%</td> <td>5 - 12%</td> <td>LITTLE 10 - 20%</td> </tr> <tr> <td>MODERATELY ORGANIC</td> <td>5 - 10%</td> <td>12 - 20%</td> <td>SOME 20 - 35%</td> </tr> <tr> <td>HIGHLY ORGANIC</td> <td>> 10%</td> <td>> 20%</td> <td>HIGHLY 35% AND ABOVE</td> </tr> </table> | | | | | | | | | | ORGANIC MATERIAL | GRANULAR SOILS | SILT - CLAY SOILS | OTHER MATERIAL | TRACE OF ORGANIC MATTER | 2 - 3% | 3 - 5% | TRACE 1 - 10% | LITTLE ORGANIC MATTER | 3 - 5% | 5 - 12% | LITTLE 10 - 20% | MODERATELY ORGANIC | 5 - 10% | 12 - 20% | SOME 20 - 35% | HIGHLY ORGANIC | > 10% | > 20% | HIGHLY 35% AND ABOVE | <p>GROUND WATER</p> <p>▽ WATER LEVEL IN BORE HOLE IMMEDIATELY AFTER DRILLING</p> <p>▽ PW STATIC WATER LEVEL AFTER 24 HOURS</p> <p>▽ PW PERCHED WATER, SATURATED ZONE, OR WATER BEARING STRATA</p> <p>○ SPRING OR SEEP</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ORGANIC MATERIAL | GRANULAR SOILS | SILT - CLAY SOILS | OTHER MATERIAL | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TRACE OF ORGANIC MATTER | 2 - 3% | 3 - 5% | TRACE 1 - 10% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| LITTLE ORGANIC MATTER | 3 - 5% | 5 - 12% | LITTLE 10 - 20% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MODERATELY ORGANIC | 5 - 10% | 12 - 20% | SOME 20 - 35% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| HIGHLY ORGANIC | > 10% | > 20% | HIGHLY 35% AND ABOVE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>CONSISTENCY OR DENSENESS</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>PRIMARY SOIL TYPE</th> <th>COMPACTNESS OR CONSISTENCY</th> <th>RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE)</th> <th>RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/FT²)</th> </tr> <tr> <td>GENERALLY GRANULAR MATERIAL (NON-COHESIVE)</td> <td>VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE</td> <td>< 4 4 TO 10 10 TO 30 30 TO 50 > 50</td> <td>N/A</td> </tr> <tr> <td>GENERALLY SILT-CLAY MATERIAL (COHESIVE)</td> <td>VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD</td> <td>< 2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 > 30</td> <td>< 0.25 0.25 TO 0.5 0.5 TO 1.0 1 TO 2 2 TO 4 > 4</td> </tr> </table> | | | | | | | | | | PRIMARY SOIL TYPE | COMPACTNESS OR CONSISTENCY | RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE) | RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/FT ²) | GENERALLY GRANULAR MATERIAL (NON-COHESIVE) | VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE | < 4 4 TO 10 10 TO 30 30 TO 50 > 50 | N/A | GENERALLY SILT-CLAY MATERIAL (COHESIVE) | VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD | < 2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 > 30 | < 0.25 0.25 TO 0.5 0.5 TO 1.0 1 TO 2 2 TO 4 > 4 | <p>MISCELLANEOUS SYMBOLS</p> <p>ROADWAY EMBANKMENT (RE) WITH SOIL DESCRIPTION</p> <p>SOIL SYMBOL</p> <p>ARTIFICIAL FILL (AF) OTHER THAN ROADWAY EMBANKMENT</p> <p>INFERRED SOIL BOUNDARY</p> <p>INFERRED ROCK LINE</p> <p>ALLUVIAL SOIL BOUNDARY</p> <p>DIP & DIP DIRECTION OF ROCK STRUCTURES</p> <p>SPT TEST BORING</p> <p>AUGER BORING</p> <p>CORE BORING</p> <p>MONITORING WELL</p> <p>PIEZOMETER INSTALLATION</p> <p>SLOPE INDICATOR INSTALLATION</p> <p>CONE PENETROMETER TEST</p> <p>SOUNDING ROD</p> <p>TEST BORING WITH CORE</p> <p>SPT N-VALUE</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| PRIMARY SOIL TYPE | COMPACTNESS OR CONSISTENCY | RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE) | RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/FT ²) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GENERALLY GRANULAR MATERIAL (NON-COHESIVE) | VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE | < 4 4 TO 10 10 TO 30 30 TO 50 > 50 | N/A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GENERALLY SILT-CLAY MATERIAL (COHESIVE) | VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD | < 2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 > 30 | < 0.25 0.25 TO 0.5 0.5 TO 1.0 1 TO 2 2 TO 4 > 4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>TEXTURE OR GRAIN SIZE</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>U.S. STD. SIEVE SIZE OPENING (MM)</th> <th>4</th> <th>10</th> <th>40</th> <th>60</th> <th>200</th> <th>270</th> </tr> <tr> <td></td> <td>4.75</td> <td>2.00</td> <td>0.42</td> <td>0.25</td> <td>0.075</td> <td>0.053</td> </tr> <tr> <th>BOULDER (BLDR.)</th> <th>COBBLE (COB.)</th> <th>GRAVEL (GR.)</th> <th>COARSE SAND (CSE. SD.)</th> <th>FINE SAND (F SD.)</th> <th>SILT (SL.)</th> <th>CLAY (CL.)</th> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <th>GRAIN SIZE</th> <th>MM</th> <th>305</th> <th>75</th> <th>2.0</th> <th>0.25</th> <th>0.05</th> <th>0.005</th> </tr> <tr> <th>SIZE</th> <th>IN.</th> <th>12</th> <th>3</th> <th></th> <th></th> <th></th> <th></th> </tr> </table> | | | | | | | | | | U.S. STD. SIEVE SIZE OPENING (MM) | 4 | 10 | 40 | 60 | 200 | 270 | | 4.75 | 2.00 | 0.42 | 0.25 | 0.075 | 0.053 | BOULDER (BLDR.) | COBBLE (COB.) | GRAVEL (GR.) | COARSE SAND (CSE. SD.) | FINE SAND (F SD.) | SILT (SL.) | CLAY (CL.) | | | | | | | | GRAIN SIZE | MM | 305 | 75 | 2.0 | 0.25 | 0.05 | 0.005 | SIZE | IN. | 12 | 3 | | | | | <p>RECOMMENDATION SYMBOLS</p> <p>UNDERCUT</p> <p>SHALLOW UNDERCUT</p> <p>UNCLASSIFIED EXCAVATION - UNSUITABLE WASTE</p> <p>UNCLASSIFIED EXCAVATION - ACCEPTABLE DEGRADABLE ROCK</p> <p>UNCLASSIFIED EXCAVATION - ACCEPTABLE, BUT NOT TO BE USED IN THE TOP 3 FEET OF EMBANKMENT OR BACKFILL</p> | | | | | | | | | | <p>ROCK HARDNESS</p> <p>VERY HARD</p> <p>HARD</p> <p>MODERATELY HARD</p> <p>MEDIUM HARD</p> <p>SOFT</p> <p>VERY SOFT</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| U.S. STD. SIEVE SIZE OPENING (MM) | 4 | 10 | 40 | 60 | 200 | 270 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 4.75 | 2.00 | 0.42 | 0.25 | 0.075 | 0.053 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| BOULDER (BLDR.) | COBBLE (COB.) | GRAVEL (GR.) | COARSE SAND (CSE. SD.) | FINE SAND (F SD.) | SILT (SL.) | CLAY (CL.) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRAIN SIZE | MM | 305 | 75 | 2.0 | 0.25 | 0.05 | 0.005 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SIZE | IN. | 12 | 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>SOIL MOISTURE - CORRELATION OF TERMS</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>SOIL MOISTURE SCALE (ATTERBERG LIMITS)</th> <th>FIELD MOISTURE DESCRIPTION</th> <th>GUIDE FOR FIELD MOISTURE DESCRIPTION</th> </tr> <tr> <td>LL - LIQUID LIMIT</td> <td>- SATURATED - (SAT.)</td> <td>USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE</td> </tr> <tr> <td>PL - PLASTIC LIMIT</td> <td>- WET - (W)</td> <td>SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE</td> </tr> <tr> <td>OM - OPTIMUM MOISTURE SHRINKAGE LIMIT</td> <td>- MOIST - (M)</td> <td>SOLID; AT OR NEAR OPTIMUM MOISTURE</td> </tr> <tr> <td>SL - SHRINKAGE LIMIT</td> <td>- DRY - (D)</td> <td>REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE</td> </tr> </table> | | | | | | | | | | SOIL MOISTURE SCALE (ATTERBERG LIMITS) | FIELD MOISTURE DESCRIPTION | GUIDE FOR FIELD MOISTURE DESCRIPTION | LL - LIQUID LIMIT | - SATURATED - (SAT.) | USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE | PL - PLASTIC LIMIT | - WET - (W) | SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE | OM - OPTIMUM MOISTURE SHRINKAGE LIMIT | - MOIST - (M) | SOLID; AT OR NEAR OPTIMUM MOISTURE | SL - SHRINKAGE LIMIT | - DRY - (D) | REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE | <p>ABBREVIATIONS</p> <p>AR - AUGER REFUSAL BT - BORING TERMINATED CL - CLAY CPT - CONE PENETRATION TEST CSE - COARSE DMT - DILATOMETER TEST DPT - DYNAMIC PENETRATION TEST e - VOID RATIO F - FINE FOSS. - FOSSILIFEROUS FRAC. - FRACTURED, FRACTURES FRAGS. - FRAGMENTS HI. - HIGHLY</p> <p>MED. - MEDIUM MICA - MICACEOUS MOD. - MODERATELY NP - NON PLASTIC ORG. - ORGANIC PMT - PRESSUREMETER TEST SAP. - SAPROLITIC SD. - SAND, SANDY SL. - SILT, SILTY SLI. - SLIGHTLY TCR - TRICONE REFUSAL w - MOISTURE CONTENT V - VERY</p> <p>VST - VANE SHEAR TEST WEA. - WEATHERED U - UNIT WEIGHT U_G - DRY UNIT WEIGHT</p> <p>SAMPLE ABBREVIATIONS</p> <p>S - BULK SS - SPLIT SPOON ST - SHELBY TUBE RS - ROCK RT - RECOMPACTED TRIAXIAL CBR - CALIFORNIA BEARING RATIO</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SOIL MOISTURE SCALE (ATTERBERG LIMITS) | FIELD MOISTURE DESCRIPTION | GUIDE FOR FIELD MOISTURE DESCRIPTION | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| LL - LIQUID LIMIT | - SATURATED - (SAT.) | USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| PL - PLASTIC LIMIT | - WET - (W) | SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| OM - OPTIMUM MOISTURE SHRINKAGE LIMIT | - MOIST - (M) | SOLID; AT OR NEAR OPTIMUM MOISTURE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SL - SHRINKAGE LIMIT | - DRY - (D) | REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>PLASTICITY</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>NON PLASTIC</th> <th colspan="2">PLASTICITY INDEX (PI)</th> <th>DRY STRENGTH</th> </tr> <tr> <td>SLIGHTLY PLASTIC</td> <td>0-5</td> <td></td> <td>VERY LOW</td> </tr> <tr> <td>MODERATELY PLASTIC</td> <td>6-15</td> <td></td> <td>SLIGHT</td> </tr> <tr> <td>HIGHLY PLASTIC</td> <td>16-25</td> <td></td> <td>MEDIUM</td> </tr> <tr> <td></td> <td>26 OR MORE</td> <td></td> <td>HIGH</td> </tr> </table> | | | | | | | | | | NON PLASTIC | PLASTICITY INDEX (PI) | | DRY STRENGTH | SLIGHTLY PLASTIC | 0-5 | | VERY LOW | MODERATELY PLASTIC | 6-15 | | SLIGHT | HIGHLY PLASTIC | 16-25 | | MEDIUM | | 26 OR MORE | | HIGH | <p>EQUIPMENT USED ON SUBJECT PROJECT</p> <p>DRILL UNITS:</p> <p><input type="checkbox"/> CME-45C</p> <p><input type="checkbox"/> CME-55</p> <p><input checked="" type="checkbox"/> CME-550</p> <p><input type="checkbox"/> VANE SHEAR TEST</p> <p><input type="checkbox"/> PORTABLE HOIST</p> <p>ADVANCING TOOLS:</p> <p><input type="checkbox"/> CLAY BITS</p> <p><input type="checkbox"/> 6" CONTINUOUS FLIGHT AUGER</p> <p><input checked="" type="checkbox"/> 8" HOLLOW AUGERS</p> <p><input type="checkbox"/> HARD FACED FINGER BITS</p> <p><input type="checkbox"/> TUNG-CARBIDE INSERTS</p> <p><input type="checkbox"/> CASING <input type="checkbox"/> W/ ADVANCER</p> <p><input type="checkbox"/> TRICONE *STEEL TEETH</p> <p><input type="checkbox"/> TRICONE *TUNG-CARB.</p> <p><input type="checkbox"/> CORE BIT</p> <p>HAMMER TYPE:</p> <p><input checked="" type="checkbox"/> AUTOMATIC <input type="checkbox"/> MANUAL</p> <p>CORE SIZE:</p> <p><input type="checkbox"/> -B <input type="checkbox"/> -H</p> <p><input type="checkbox"/> -N</p> <p>HAND TOOLS:</p> <p><input type="checkbox"/> POST HOLE DIGGER</p> <p><input type="checkbox"/> HAND AUGER</p> <p><input type="checkbox"/> SOUNDING ROD</p> <p><input type="checkbox"/> VANE SHEAR TEST</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| NON PLASTIC | PLASTICITY INDEX (PI) | | DRY STRENGTH | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SLIGHTLY PLASTIC | 0-5 | | VERY LOW | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MODERATELY PLASTIC | 6-15 | | SLIGHT | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| HIGHLY PLASTIC | 16-25 | | MEDIUM | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 26 OR MORE | | HIGH | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>COLOR</p> <p>DESCRIPTIONS MAY INCLUDE COLOR OR COLOR COMBINATIONS (TAN, RED, YELLOW-BROWN, BLUE-GRAY). MODIFIERS SUCH AS LIGHT, DARK, STREAKED, ETC. ARE USED TO DESCRIBE APPEARANCE.</p> | | | | | | | | | | <p>FRACTURE SPACING</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>TERM</th> <th>SPACING</th> </tr> <tr> <td>VERY WIDE</td> <td>MORE THAN 10 FEET</td> </tr> <tr> <td>WIDE</td> <td>3 TO 10 FEET</td> </tr> <tr> <td>MODERATELY CLOSE</td> <td>1 TO 3 FEET</td> </tr> <tr> <td>CLOSE</td> <td>0.16 TO 1 FOOT</td> </tr> <tr> <td>VERY CLOSE</td> <td>LESS THAN 0.16 FEET</td> </tr> </table> | | | | | | | | | | TERM | SPACING | VERY WIDE | MORE THAN 10 FEET | WIDE | 3 TO 10 FEET | MODERATELY CLOSE | 1 TO 3 FEET | CLOSE | 0.16 TO 1 FOOT | VERY CLOSE | LESS THAN 0.16 FEET | <p>BEDDING</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>TERM</th> <th>THICKNESS</th> </tr> <tr> <td>VERY THICKLY BEDDED</td> <td>4 FEET</td> </tr> <tr> <td>THICKLY BEDDED</td> <td>1.5 - 4 FEET</td> </tr> <tr> <td>THINLY BEDDED</td> <td>0.16 - 1.5 FEET</td> </tr> <tr> <td>VERY THINLY BEDDED</td> <td>0.03 - 0.16 FEET</td> </tr> <tr> <td>THICKLY LAMINATED</td> <td>0.008 - 0.03 FEET</td> </tr> <tr> <td>THINLY LAMINATED</td> <td>< 0.008 FEET</td> </tr> </table> | | | | | | | | | | TERM | THICKNESS | VERY THICKLY BEDDED | 4 FEET | THICKLY BEDDED | 1.5 - 4 FEET | THINLY BEDDED | 0.16 - 1.5 FEET | VERY THINLY BEDDED | 0.03 - 0.16 FEET | THICKLY LAMINATED | 0.008 - 0.03 FEET | THINLY LAMINATED | < 0.008 FEET | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TERM | SPACING | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| VERY WIDE | MORE THAN 10 FEET | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| WIDE | 3 TO 10 FEET | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MODERATELY CLOSE | 1 TO 3 FEET | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CLOSE | 0.16 TO 1 FOOT | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| VERY CLOSE | LESS THAN 0.16 FEET | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TERM | THICKNESS | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| VERY THICKLY BEDDED | 4 FEET | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| THICKLY BEDDED | 1.5 - 4 FEET | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| THINLY BEDDED | 0.16 - 1.5 FEET | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| VERY THINLY BEDDED | 0.03 - 0.16 FEET | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| THICKLY LAMINATED | 0.008 - 0.03 FEET | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| THINLY LAMINATED | < 0.008 FEET | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>INDURATION</p> <p>FOR SEDIMENTARY ROCKS, INDURATION IS THE HARDENING OF MATERIAL BY CEMENTING, HEAT, PRESSURE, ETC.</p> <p>FRIABLE</p> <p>MODERATELY INDURATED</p> <p>INDURATED</p> <p>EXTREMELY INDURATED</p> <p>RUBBING WITH FINGER FREES NUMEROUS GRAINS; GENTLE BLOW BY HAMMER DISINTEGRATES SAMPLE.</p> <p>GRAINS CAN BE SEPARATED FROM SAMPLE WITH STEEL PROBE; BREAKS EASILY WHEN HIT WITH HAMMER.</p> <p>GRAINS ARE DIFFICULT TO SEPARATE WITH STEEL PROBE; DIFFICULT TO BREAK WITH HAMMER.</p> <p>SHARP HAMMER BLOWS REQUIRED TO BREAK SAMPLE; SAMPLE BREAKS ACROSS GRAINS.</p> | | | | | | | | | | <p>BENCH MARK:</p> <p style="text-align: right;">ELEVATION: FEET</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>NOTES:</p> <p>BORING ELEVATIONS GENERATED FROM FILE U4713A.JS.TNL.TIN FID = FILLED IMMEDIATELY AFTER DRILLING</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |


| | |
|---|-----------|
| PROJECT REFERENCE NO. | SHEET NO. |
| U-4713A | 3 |
| SITE PLAN | |
| 0 20 40 FEET | |

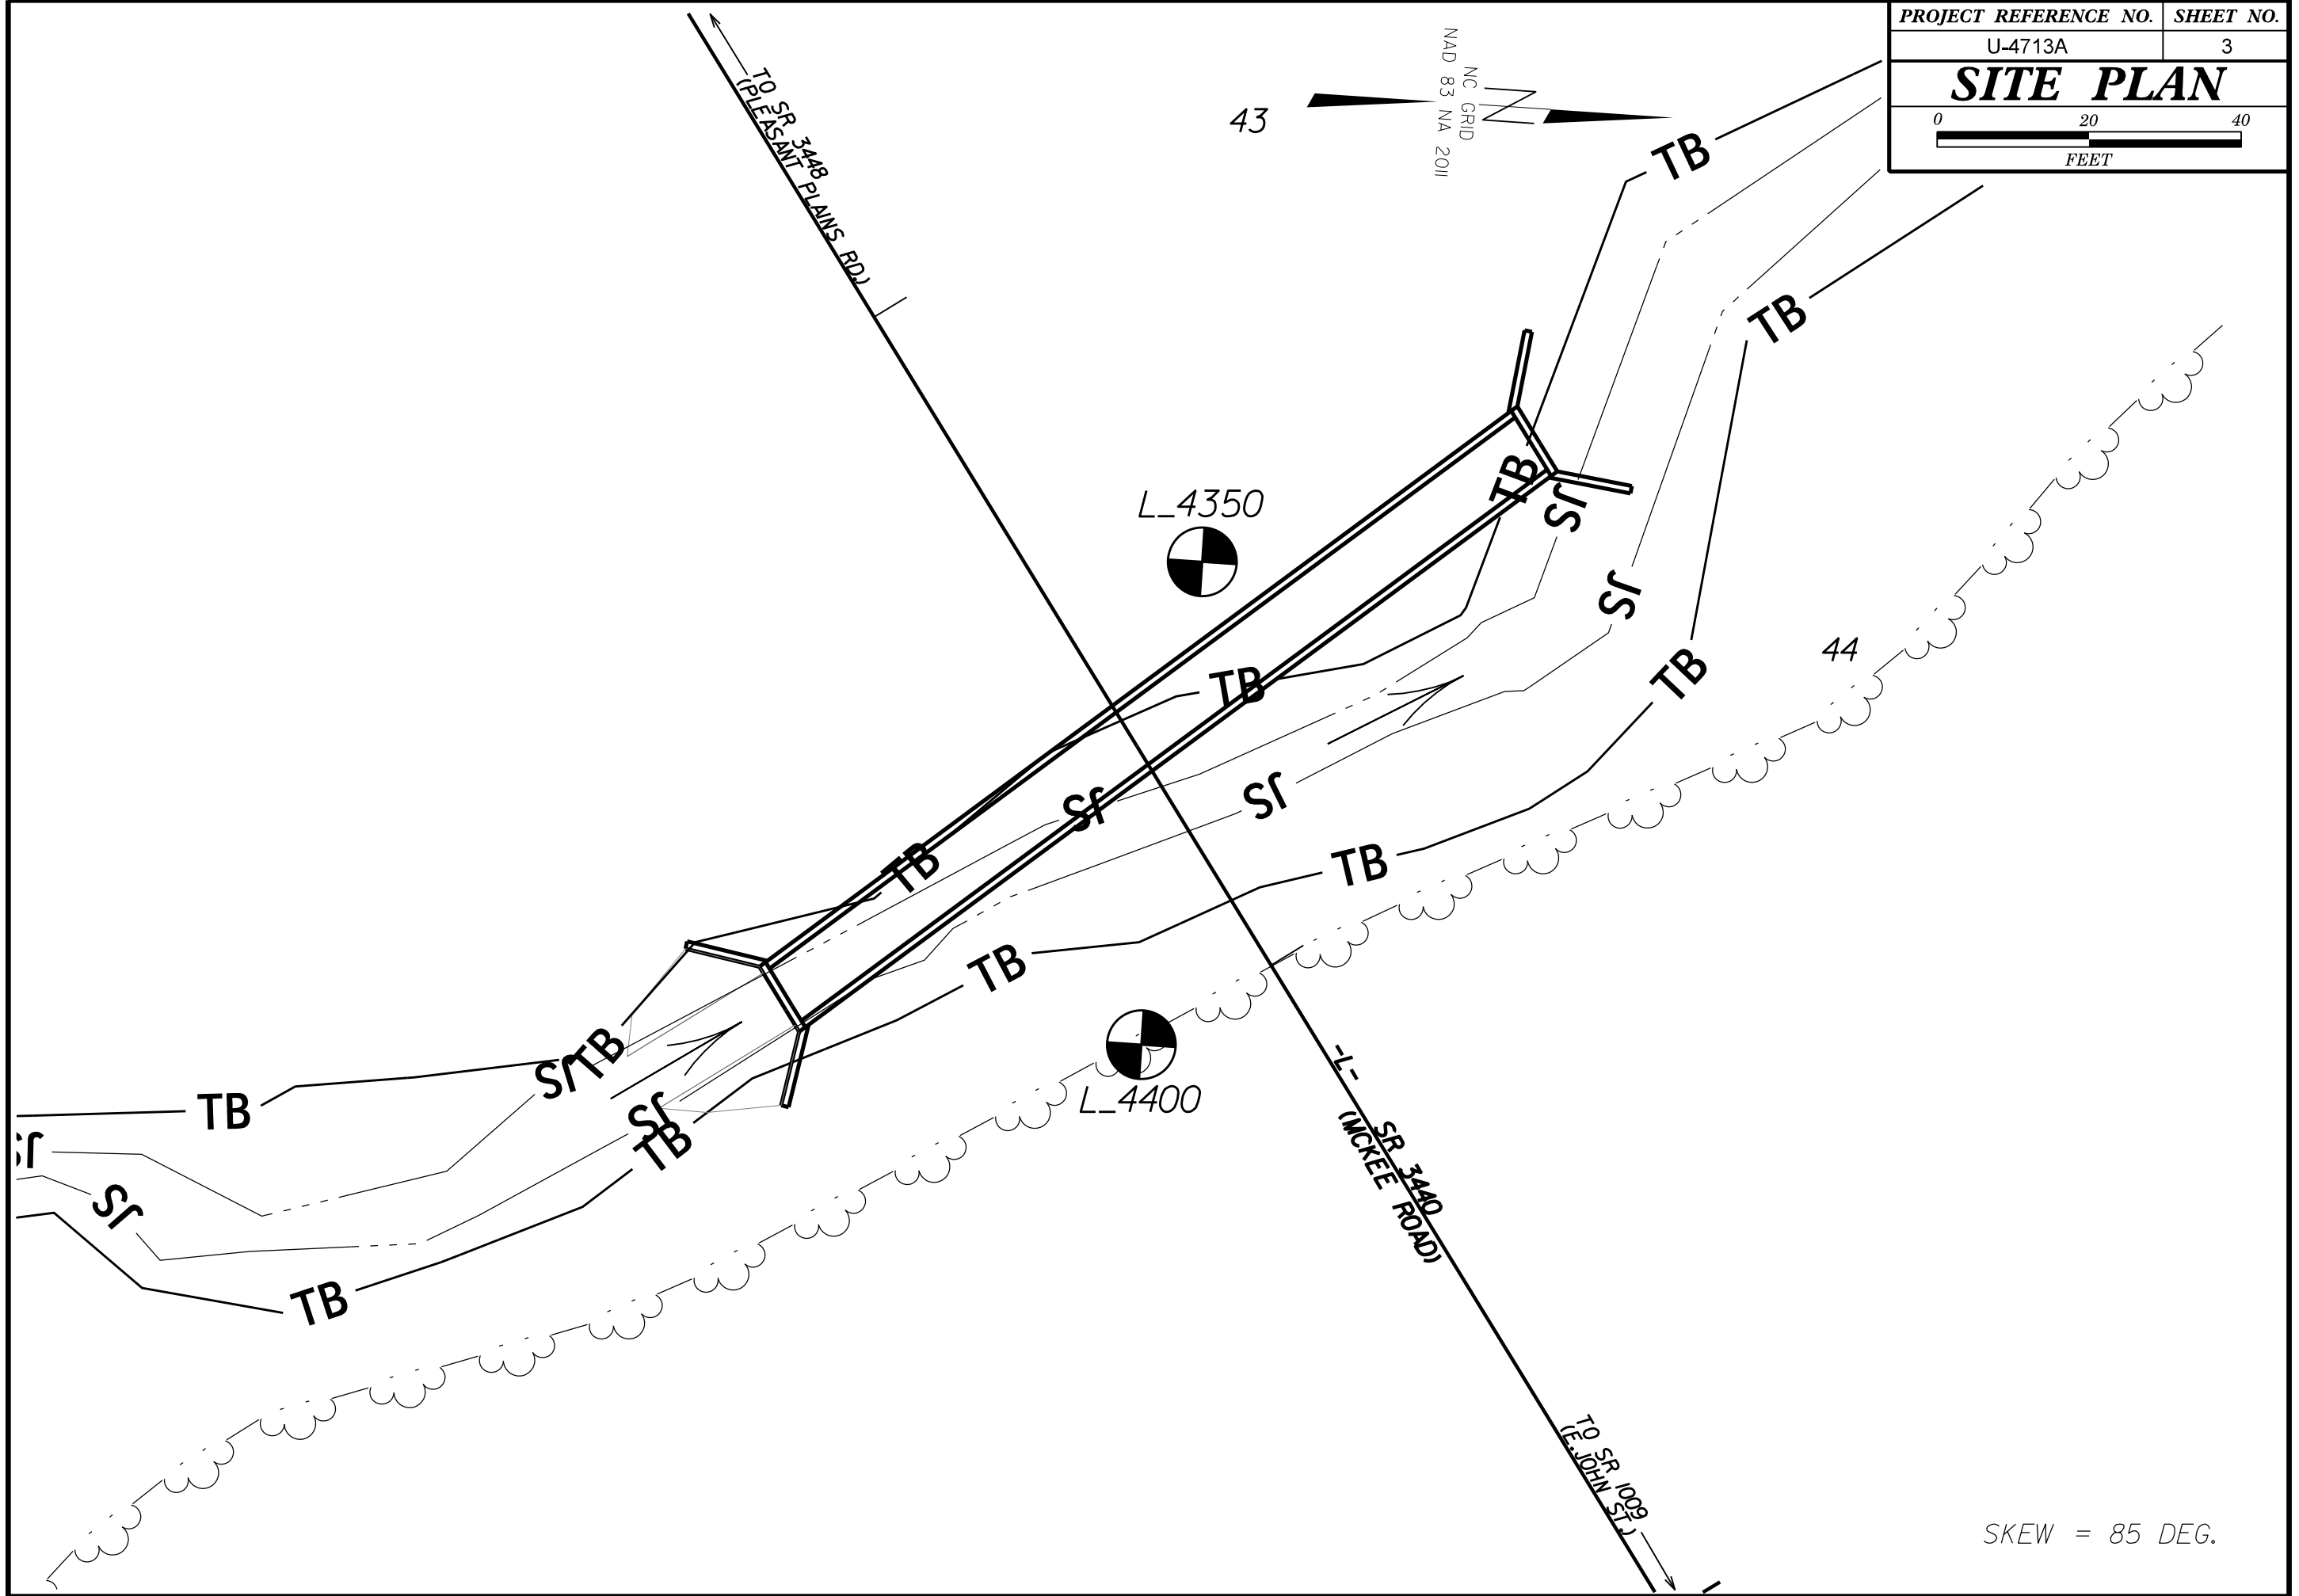

SKEW = 85 DEG.

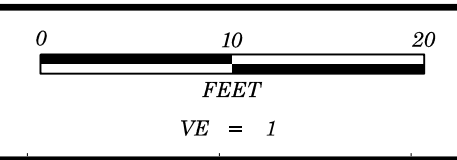

| | |
|---|------------------|
| PROJECT REFERENCE NO. | SHEET NO. |
| U-4713A | 4 |
| CROSS SECTION OF -L- AT CULVERT CROSSING | |

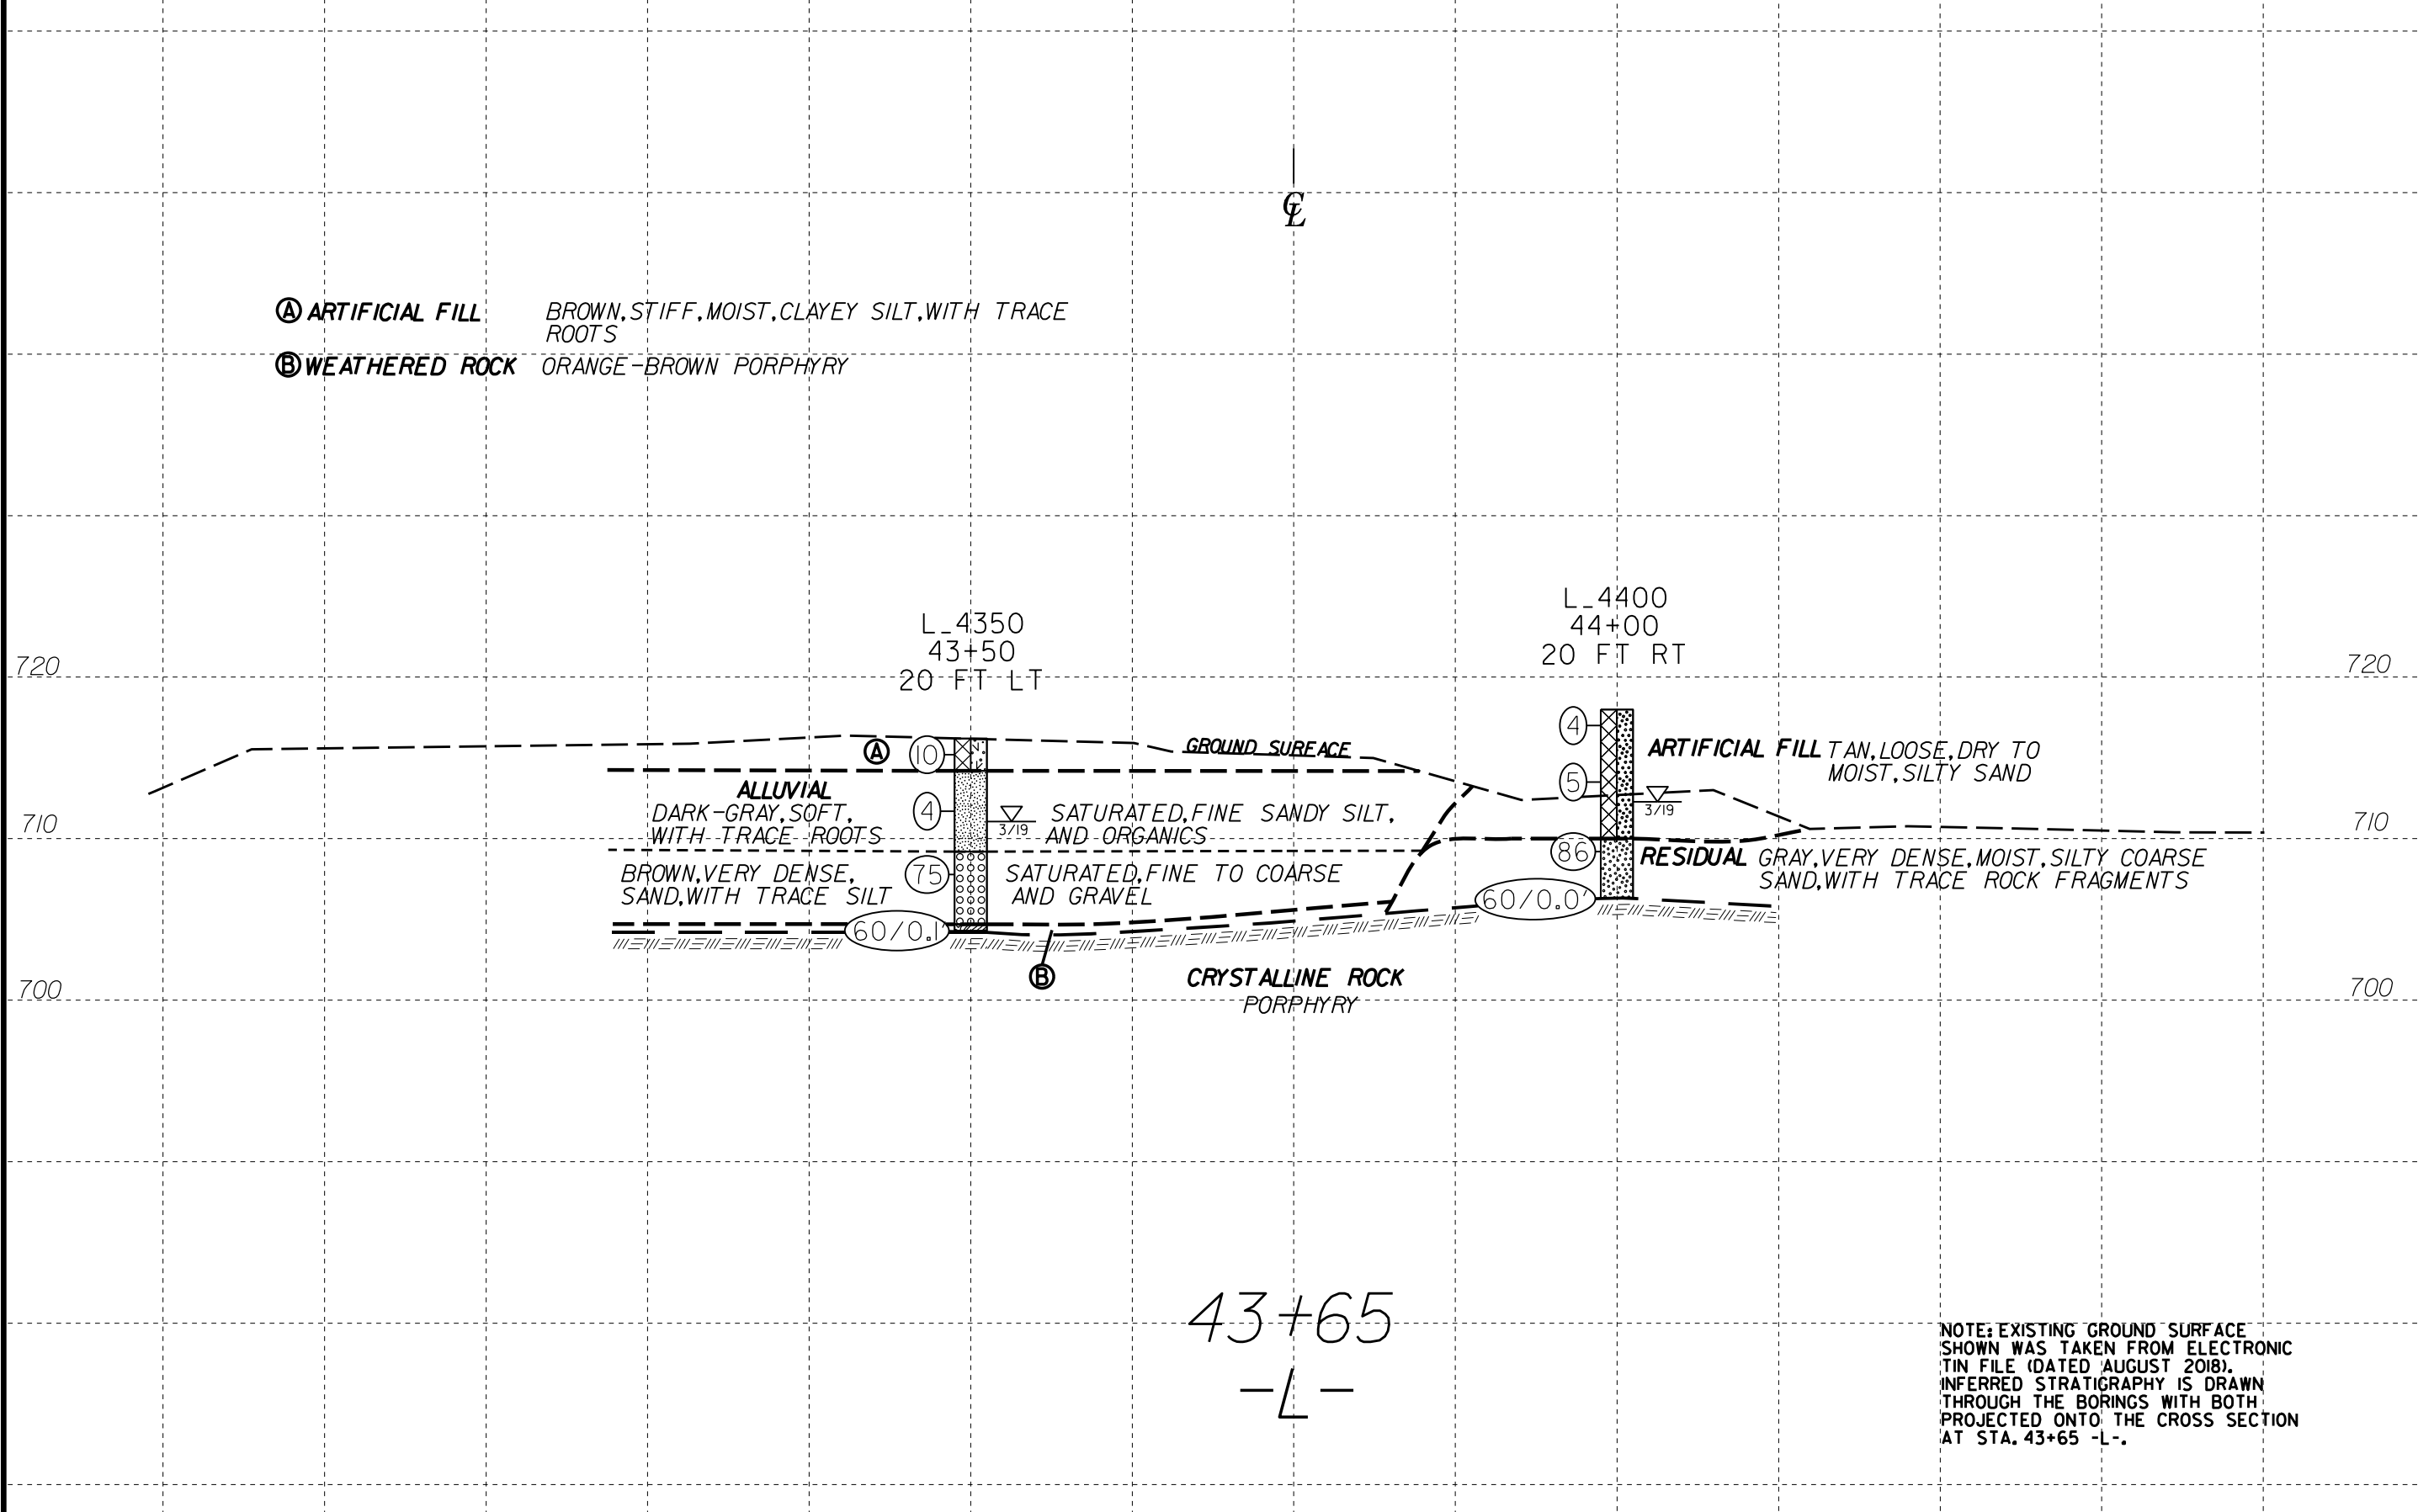

Ⓐ **ARTIFICIAL FILL** BROWN, STIFF, MOIST, CLAYEY SILT, WITH TRACE ROOTS
 Ⓑ **WEATHERED ROCK** ORANGE-BROWN PORPHYRY

L_4350
43+50
20 FT LT

L_4400
44+00
20 FT RT

43+65
-L-

NOTE: EXISTING GROUND SURFACE SHOWN WAS TAKEN FROM ELECTRONIC TIN FILE (DATED AUGUST 2018). INFERRED STRATIGRAPHY IS DRAWN THROUGH THE BORINGS WITH BOTH PROJECTED ONTO THE CROSS SECTION AT STA. 43+65 -L-.



GEOTECHNICAL BORING REPORT

BORE LOG

| WBS 39077.1.2 | | TIP U-4713A | | COUNTY MECKLENBURG | | GEOLOGIST S. Woods | | | | | | | | | |
|---|-----------------|---------------------|--------------------------|---------------------|-----------------------|-------------------------|-----------------|----|----|-----|-----------|---------|---------------------------|------------|--|
| SITE DESCRIPTION Culvert on SR 3440 (McKee Road) | | | | | | | GROUND WTR (ft) | | | | | | | | |
| BORING NO. L_4350 | | STATION 43+50 | | OFFSET 20 ft LT | | ALIGNMENT -L- | | | | | | | | | |
| COLLAR ELEV. 716.2 ft | | TOTAL DEPTH 11.9 ft | | NORTHING 491,823 | | EASTING 1,489,835 | | | | | | | | | |
| DRILL RIG/HAMMER EFF./DATE HPC8513 CME-550 89% 02/06/2019 | | | DRILL METHOD H.S. Augers | | HAMMER TYPE Automatic | | | | | | | | | | |
| DRILLER C. Odom | | START DATE 03/19/19 | | COMP. DATE 03/19/19 | | SURFACE WATER DEPTH N/A | | | | | | | | | |
| ELEV (ft) | DRIVE ELEV (ft) | DEPTH (ft) | BLOW COUNT | | | BLOWS PER FOOT | | | | | SAMP. NO. | LOG MOI | SOIL AND ROCK DESCRIPTION | DEPTH (ft) | |
| | | | 0.5ft | 0.5ft | 0.5ft | 0 | 25 | 50 | 75 | 100 | | | | | |
| 720 | | | | | | | | | | | | | | | |
| 715 | 716.2 | 0.0 | 2 | 8 | 2 | | | | | | | | | 716.2 | GROUND SURFACE |
| | 712.7 | 3.5 | 4 | 2 | 2 | | | | | | | | | 714.2 | ARTIFICIAL FILL Brown, clayey silt with trace roots |
| 710 | 707.7 | 8.5 | 12 | 35 | 40 | | | | | | | | | 709.2 | ALLUVIAL Dark-gray, fine sandy silt with trace roots and organics |
| | 704.4 | 11.8 | | | | | | | | | | | | 704.7 | Brown, fine to coarse sand with trace silt and gravel |
| 705 | | | | | | | | | | | | | | 704.3 | WEATHERED ROCK Orange-brown porphyry |
| | | | | | | | | | | | | | | 704.3 | CRYSTALLINE ROCK Orange-brown porphyry |

| WBS 39077.1.2 | | TIP U-4713A | | COUNTY MECKLENBURG | | GEOLOGIST C.T. Tang | | | | | | | | | |
|---|-----------------|---------------------|--------------------------|---------------------|-----------------------|-------------------------|-----------------|----|----|-----|-----------|---------|---------------------------|------------|---|
| SITE DESCRIPTION Culvert on SR 3440 (McKee Road) | | | | | | | GROUND WTR (ft) | | | | | | | | |
| BORING NO. L_4400 | | STATION 44+00 | | OFFSET 20 ft RT | | ALIGNMENT -L- | | | | | | | | | |
| COLLAR ELEV. 718.0 ft | | TOTAL DEPTH 11.7 ft | | NORTHING 491,820 | | EASTING 1,489,898 | | | | | | | | | |
| DRILL RIG/HAMMER EFF./DATE HPC8513 CME-550 89% 02/06/2019 | | | DRILL METHOD H.S. Augers | | HAMMER TYPE Automatic | | | | | | | | | | |
| DRILLER C. Odom | | START DATE 03/18/19 | | COMP. DATE 03/18/19 | | SURFACE WATER DEPTH N/A | | | | | | | | | |
| ELEV (ft) | DRIVE ELEV (ft) | DEPTH (ft) | BLOW COUNT | | | BLOWS PER FOOT | | | | | SAMP. NO. | LOG MOI | SOIL AND ROCK DESCRIPTION | DEPTH (ft) | |
| | | | 0.5ft | 0.5ft | 0.5ft | 0 | 25 | 50 | 75 | 100 | | | | | |
| 720 | | | | | | | | | | | | | | | |
| | 718.0 | 0.0 | 1 | 2 | 2 | | | | | | | | | 718.0 | GROUND SURFACE |
| 715 | 714.5 | 3.5 | WOH | 3 | 2 | | | | | | | | | 714.5 | ARTIFICIAL FILL Tan, silty sand |
| 710 | 709.5 | 8.5 | 9 | 26 | 60 | | | | | | | | | 710.0 | RESIDUAL Gray, silty coarse sand with trace rock fragments |
| | 706.3 | 11.7 | | | | | | | | | | | | 706.3 | Boring Terminated by Auger Refusal at Elevation 706.3 ft on Crystalline Rock (Porphyry) |

NCDOT BORE DOUBLE U4713A_GEO_CULV_BH.GPJ NC_DOT.GDT 8/6/19

REFERENCE: U-4713A

PROJECT: 39077

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT

STRUCTURE
SUBSURFACE INVESTIGATION

COUNTY Mecklenberg
SITE DESCRIPTION Noise Wall on SR 3440 (Mckee Rd.)
to SR 1009 (Monroe Rd.)

CONTENTS

| SHEET NO. | DESCRIPTION |
|-----------|----------------------|
| 1 | TITLE SHEET |
| 2 | LEGEND (SOIL & ROCK) |
| 3 | SITE PLAN |
| 4 | PROFILE |
| 5-9 | BORE LOG(S) |

| STATE | STATE PROJECT REFERENCE NO. | SHEET NO. | TOTAL SHEETS |
|-------|-----------------------------|-----------|--------------|
| N.C. | U-4713A | 1 | 9 |

CAUTION NOTICE

THE SUBSURFACE INFORMATION AND THE SUBSURFACE INVESTIGATION ON WHICH IT IS BASED WERE MADE FOR THE PURPOSE OF STUDY, PLANNING AND DESIGN, AND NOT FOR CONSTRUCTION OR PAY PURPOSES. THE VARIOUS FIELD BORING LOGS, ROCK CORES AND SOIL TEST DATA AVAILABLE MAY BE REVIEWED OR INSPECTED IN RALEIGH BY CONTACTING THE N. C. DEPARTMENT OF TRANSPORTATION, GEOTECHNICAL ENGINEERING UNIT AT (919) 707-6850. THE SUBSURFACE PLANS AND REPORTS, FIELD BORING LOGS, ROCK CORES AND SOIL TEST DATA ARE NOT PART OF THE CONTRACT.

GENERAL SOIL AND ROCK STRATA DESCRIPTIONS AND INDICATED BOUNDARIES ARE BASED ON A GEOTECHNICAL INTERPRETATION OF ALL AVAILABLE SUBSURFACE DATA AND MAY NOT NECESSARILY REFLECT THE ACTUAL SUBSURFACE CONDITIONS BETWEEN BORINGS OR BETWEEN SAMPLED STRATA WITHIN THE BOREHOLE. THE LABORATORY SAMPLE DATA AND THE IN SITU (IN-PLACE) TEST DATA CAN BE RELIED ON ONLY TO THE DEGREE OF RELIABILITY INHERENT IN THE STANDARD TEST METHOD. THE OBSERVED WATER LEVELS OR SOIL MOISTURE CONDITIONS INDICATED IN THE SUBSURFACE INVESTIGATIONS ARE AS RECORDED AT THE TIME OF THE INVESTIGATION. THESE WATER LEVELS OR SOIL MOISTURE CONDITIONS MAY VARY CONSIDERABLY WITH TIME ACCORDING TO CLIMATIC CONDITIONS INCLUDING TEMPERATURES, PRECIPITATION AND WIND, AS WELL AS OTHER NON-CLIMATIC FACTORS.

THE BIDDER OR CONTRACTOR IS CAUTIONED THAT DETAILS SHOWN ON THE SUBSURFACE PLANS ARE PRELIMINARY ONLY AND IN MANY CASES THE FINAL DESIGN DETAILS ARE DIFFERENT. FOR BIDDING AND CONSTRUCTION PURPOSES, REFER TO THE CONSTRUCTION PLANS AND DOCUMENTS FOR FINAL DESIGN INFORMATION ON THIS PROJECT. THE DEPARTMENT DOES NOT WARRANT OR GUARANTEE THE SUFFICIENCY OR ACCURACY OF THE INVESTIGATION MADE, NOR THE INTERPRETATIONS MADE, OR OPINION OF THE DEPARTMENT AS TO THE TYPE OF MATERIALS AND CONDITIONS TO BE ENCOUNTERED. THE BIDDER OR CONTRACTOR IS CAUTIONED TO MAKE SUCH INDEPENDENT SUBSURFACE INVESTIGATIONS AS HE DEEMS NECESSARY TO SATISFY HIMSELF AS TO CONDITIONS TO BE ENCOUNTERED ON THE PROJECT. THE CONTRACTOR SHALL HAVE NO CLAIM FOR ADDITIONAL COMPENSATION OR FOR AN EXTENSION OF TIME FOR ANY REASON RESULTING FROM THE ACTUAL CONDITIONS ENCOUNTERED AT THE SITE DIFFERING FROM THOSE INDICATED IN THE SUBSURFACE INFORMATION.

- NOTES:
1. THE INFORMATION CONTAINED HEREIN IS NOT IMPLIED OR GUARANTEED BY THE N. C. DEPARTMENT OF TRANSPORTATION AS ACCURATE NOR IS IT CONSIDERED PART OF THE PLANS, SPECIFICATIONS OR CONTRACT FOR THE PROJECT.
 2. BY HAVING REQUESTED THIS INFORMATION, THE CONTRACTOR SPECIFICALLY WAIVES ANY CLAIMS FOR INCREASED COMPENSATION OR EXTENSION OF TIME BASED ON DIFFERENCES BETWEEN THE CONDITIONS INDICATED HEREIN AND THE ACTUAL CONDITIONS AT THE PROJECT SITE.

PERSONNEL

J.K. Stickney

C.L. Smith

B.E. Foster


INVESTIGATED BY J.K. Stickney

DRAWN BY T.T. Walker, F&R Inc.

CHECKED BY J.E. Beverly

SUBMITTED BY K.B. Miller

DATE January 2020



DocuSigned by:

[Signature]

957A789AED704CB...

1/14/2020

SIGNATURE

DATE


DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

NORTH CAROLINA DEPARTMENT OF TRANSPORTATION DIVISION OF HIGHWAYS GEOTECHNICAL ENGINEERING UNIT

SUBSURFACE INVESTIGATION

SOIL AND ROCK LEGEND, TERMS, SYMBOLS, AND ABBREVIATIONS

| SOIL DESCRIPTION | | | | GRADATION | | | | ROCK DESCRIPTION | | | | TERMS AND DEFINITIONS | | | |
|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| SOIL IS CONSIDERED UNCONSOLIDATED, SEMI-CONSOLIDATED, OR WEATHERED EARTH MATERIALS THAT CAN BE PENETRATED WITH A CONTINUOUS FLIGHT POWER AUGER AND YIELD LESS THAN 100 BLOWS PER FOOT ACCORDING TO THE STANDARD PENETRATION TEST (AASHTO T 206, ASTM D1586). SOIL CLASSIFICATION IS BASED ON THE AASHTO SYSTEM. BASIC DESCRIPTIONS GENERALLY INCLUDE THE FOLLOWING: CONSISTENCY, COLOR, TEXTURE, MOISTURE, AASHTO CLASSIFICATION, AND OTHER PERTINENT FACTORS SUCH AS MINERALOGICAL COMPOSITION, ANGULARITY, STRUCTURE, PLASTICITY, ETC. FOR EXAMPLE, VERY STIFF GRAY SILTY CLAY MOST WITH INTERBEDDED FINE SAND LAYERS, HIGHLY PLASTIC, A-7-6 | | | | WELL GRADED - INDICATES A GOOD REPRESENTATION OF PARTICLE SIZES FROM FINE TO COARSE. UNIFORMLY GRADED - INDICATES THAT SOIL PARTICLES ARE ALL APPROXIMATELY THE SAME SIZE. GAP-GRADED - INDICATES A MIXTURE OF UNIFORM PARTICLE SIZES OF TWO OR MORE SIZES. | | | | HARD ROCK IS NON-COASTAL PLAIN MATERIAL THAT WOULD YIELD SPT REFUSAL IF TESTED. AN INFERRED ROCK LINE INDICATES THE LEVEL AT WHICH NON-COASTAL PLAIN MATERIAL WOULD YIELD SPT REFUSAL. SPT REFUSAL IS PENETRATION BY A SPLIT SPOON SAMPLER EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS IN NON-COASTAL PLAIN MATERIAL. THE TRANSITION BETWEEN SOIL AND ROCK IS OFTEN REPRESENTED BY A ZONE OF WEATHERED ROCK. ROCK MATERIALS ARE TYPICALLY DIVIDED AS FOLLOWS: NON-COASTAL PLAIN MATERIAL THAT WOULD YIELD SPT N VALUES > 100 BLOWS PER FOOT IF TESTED. FINE TO COARSE GRAIN IGNEOUS AND METAMORPHIC ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES GRANITE, GNEISS, GABBRO, SCHIST, ETC. FINE TO COARSE GRAIN METAMORPHIC AND NON-COASTAL PLAIN SEDIMENTARY ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES PHYLLITE, SLATE, SANDSTONE, ETC. COASTAL PLAIN SEDIMENTS CEMENTED INTO ROCK, BUT MAY NOT YIELD SPT REFUSAL. ROCK TYPE INCLUDES LIMESTONE, SANDSTONE, CEMENTED SHELL BEDS, ETC. | | | | ALLUVIUM (ALLUV.) - SOILS THAT HAVE BEEN TRANSPORTED BY WATER. AQUIFER - A WATER BEARING FORMATION OR STRATA. ARENACEOUS - APPLIED TO ROCKS THAT HAVE BEEN DERIVED FROM SAND OR THAT CONTAIN SAND. ARGILLACEOUS - APPLIED TO ALL ROCKS OR SUBSTANCES COMPOSED OF CLAY MINERALS, OR HAVING A NOTABLE PROPORTION OF CLAY IN THEIR COMPOSITION, SUCH AS SHALE, SLATE, ETC. ARTESIAN - GROUND WATER THAT IS UNDER SUFFICIENT PRESSURE TO RISE ABOVE THE LEVEL AT WHICH IT IS ENCOUNTERED, BUT WHICH DOES NOT NECESSARILY RISE TO OR ABOVE THE GROUND SURFACE. CALCAREOUS (CALC.) - SOILS THAT CONTAIN APPRECIABLE AMOUNTS OF CALCIUM CARBONATE. COLLUVIUM - ROCK FRAGMENTS MIXED WITH SOIL DEPOSITED BY GRAVITY ON SLOPE OR AT BOTTOM OF SLOPE. CORE RECOVERY (REC.) - TOTAL LENGTH OF ALL MATERIAL RECOVERED IN THE CORE BARREL DIVIDED BY TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. DIKE - A TABULAR BODY OF IGNEOUS ROCK THAT CUTS ACROSS THE STRUCTURE OF ADJACENT ROCKS OR CUTS MASSIVE ROCK. DIP - THE ANGLE AT WHICH A STRATUM OR ANY PLANAR FEATURE IS INCLINED FROM THE HORIZONTAL. DIP DIRECTION (DIP AZIMUTH) - THE DIRECTION OR BEARING OF THE HORIZONTAL TRACE OF THE LINE OF DIP, MEASURED CLOCKWISE FROM NORTH. FAULT - A FRACTURE OR FRACTURE ZONE ALONG WHICH THERE HAS BEEN DISPLACEMENT OF THE SIDES RELATIVE TO ONE ANOTHER PARALLEL TO THE FRACTURE. FISSILE - A PROPERTY OF SPLITTING ALONG CLOSELY SPACED PARALLEL PLANES. FLOAT - ROCK FRAGMENTS ON SURFACE NEAR THEIR ORIGINAL POSITION AND DISLODGED FROM PARENT MATERIAL. FLOOD PLAIN (FP) - LAND BORDERING A STREAM, BUILT OF SEDIMENTS DEPOSITED BY THE STREAM. FORMATION (FM) - A MAPPABLE GEOLOGIC UNIT THAT CAN BE RECOGNIZED AND TRACED IN THE FIELD. JOINT - FRACTURE IN ROCK ALONG WHICH NO APPRECIABLE MOVEMENT HAS OCCURRED. LEDGE - A SHELF-LIKE RIDGE OR PROJECTION OF ROCK WHOSE THICKNESS IS SMALL COMPARED TO ITS LATERAL EXTENT. LENS - A BODY OF SOIL OR ROCK THAT THINS OUT IN ONE OR MORE DIRECTIONS. MOTTLED (MOT.) - IRREGULARLY MARKED WITH SPOTS OF DIFFERENT COLORS. MOTTLING IN SOILS USUALLY INDICATES POOR AERATION AND LACK OF GOOD DRAINAGE. PERCHED WATER - WATER MAINTAINED ABOVE THE NORMAL GROUND WATER LEVEL BY THE PRESENCE OF AN INTERVENING IMPERVIOUS STRATUM. RESIDUAL (RES.) SOIL - SOIL FORMED IN PLACE BY THE WEATHERING OF ROCK. ROCK QUALITY DESIGNATION (RQD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. SAPROLITE (SAP.) - RESIDUAL SOIL THAT RETAINS THE RELIC STRUCTURE OR FABRIC OF THE PARENT ROCK. SILL - AN INTRUSIVE BODY OF IGNEOUS ROCK OF APPROXIMATELY UNIFORM THICKNESS AND RELATIVELY THIN COMPARED WITH ITS LATERAL EXTENT, THAT HAS BEEN EMPLACED PARALLEL TO THE BEDDING OR SCHISTOSITY OF THE INTRUDED ROCKS. SLICKENSIDE - POLISHED AND STRIATED SURFACE THAT RESULTS FROM FRICTION ALONG A FAULT OR SLIP PLANE. STANDARD PENETRATION TEST (PENETRATION RESISTANCE) (SPT) - NUMBER OF BLOWS (N OR BPF) OF A 140 LB. HAMMER FALLING 30 INCHES REQUIRED TO PRODUCE A PENETRATION OF 1 FOOT INTO SOIL WITH A 2 INCH OUTSIDE DIAMETER SPLIT SPOON SAMPLER. SPT REFUSAL IS PENETRATION EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS. STRATA CORE RECOVERY (SREC.) - TOTAL LENGTH OF STRATA MATERIAL RECOVERED DIVIDED BY TOTAL LENGTH OF STRATUM AND EXPRESSED AS A PERCENTAGE. STRATA ROCK QUALITY DESIGNATION (SROD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS WITHIN A STRATUM EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF STRATA AND EXPRESSED AS A PERCENTAGE. TOPSOIL (TS) - SURFACE SOILS USUALLY CONTAINING ORGANIC MATTER. | | | |
| SOIL LEGEND AND AASHTO CLASSIFICATION | | | | ANGULARITY OF GRAINS | | | | WEATHERING | | | | MINERALOGICAL COMPOSITION | | | |
| GENERAL CLASS. GRANULAR MATERIALS (< 35% PASSING #200) SILT-CLAY MATERIALS (> 35% PASSING #200) ORGANIC MATERIALS | | | | THE ANGULARITY OR ROUNDNESS OF SOIL GRAINS IS DESIGNATED BY THE TERMS: ANGULAR, SUBANGULAR, SUBROUNDED, OR ROUNDED. | | | | MINERAL NAMES SUCH AS QUARTZ, FELDSPAR, MICA, TALC, KAOLIN, ETC. ARE USED IN DESCRIPTIONS WHEN THEY ARE CONSIDERED OF SIGNIFICANCE. | | | | COMPRESSION | | | |
| GROUP CLASS. A-1-a, A-1-b, A-3, A-2-4, A-2-5, A-2-6, A-2-7, A-4, A-5, A-6, A-7, A-7.5, A-7.6, A-1-A-2, A-3, A-4, A-5, A-6, A-7 | | | | MINERALOGICAL COMPOSITION | | | | SLIGHTLY COMPRESSIBLE LL < 31 MODERATELY COMPRESSIBLE LL = 31 - 50 HIGHLY COMPRESSIBLE LL > 50 | | | | PERCENTAGE OF MATERIAL | | | |
| SYMBOL | | | | COMPRESSION | | | | ORGANIC MATERIAL GRANULAR SOILS SILT - CLAY SOILS OTHER MATERIAL | | | | GROUND WATER | | | |
| % PASSING #10 #40 #200 | | | | PERCENTAGE OF MATERIAL | | | | TRACE OF ORGANIC MATTER 2 - 3% LITTLE ORGANIC MATTER 3 - 5% MODERATELY ORGANIC 5 - 10% HIGHLY ORGANIC > 10% | | | | WATER LEVEL IN BORE HOLE IMMEDIATELY AFTER DRILLING | | | |
| MATERIAL PASSING #40 LL PI | | | | PERCENTAGE OF MATERIAL | | | | TRACE OF ORGANIC MATTER 2 - 3% LITTLE ORGANIC MATTER 3 - 5% MODERATELY ORGANIC 5 - 10% HIGHLY ORGANIC > 10% | | | | STATIC WATER LEVEL AFTER 24 HOURS | | | |
| GROUP INDEX | | | | PERCENTAGE OF MATERIAL | | | | TRACE OF ORGANIC MATTER 2 - 3% LITTLE ORGANIC MATTER 3 - 5% MODERATELY ORGANIC 5 - 10% HIGHLY ORGANIC > 10% | | | | PERCHED WATER, SATURATED ZONE, OR WATER BEARING STRATA | | | |
| USUAL TYPES OF MAJOR MATERIALS | | | | PERCENTAGE OF MATERIAL | | | | TRACE OF ORGANIC MATTER 2 - 3% LITTLE ORGANIC MATTER 3 - 5% MODERATELY ORGANIC 5 - 10% HIGHLY ORGANIC > 10% | | | | SPRING OR SEEP | | | |
| GEN. RATING AS SUBGRADE | | | | PERCENTAGE OF MATERIAL | | | | TRACE OF ORGANIC MATTER 2 - 3% LITTLE ORGANIC MATTER 3 - 5% MODERATELY ORGANIC 5 - 10% HIGHLY ORGANIC > 10% | | | | MISCELLANEOUS SYMBOLS | | | |
| EXCELLENT TO GOOD FAIR TO POOR FAIR TO POOR POOR UNSUITABLE | | | | PERCENTAGE OF MATERIAL | | | | TRACE OF ORGANIC MATTER 2 - 3% LITTLE ORGANIC MATTER 3 - 5% MODERATELY ORGANIC 5 - 10% HIGHLY ORGANIC > 10% | | | | ROADWAY EMBANKMENT (RE) WITH SOIL DESCRIPTION | | | |
| PI OF A-7-5 SUBGROUP IS ≤ LL - 30 ; PI OF A-7-6 SUBGROUP IS > LL - 30 | | | | PERCENTAGE OF MATERIAL | | | | TRACE OF ORGANIC MATTER 2 - 3% LITTLE ORGANIC MATTER 3 - 5% MODERATELY ORGANIC 5 - 10% HIGHLY ORGANIC > 10% | | | | SOIL SYMBOL | | | |
| CONSISTENCY OR DENSENESS | | | | RECOMMENDATION SYMBOLS | | | | ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. IN GRANITOID ROCKS, ALL FELDSPARS DULL AND DISCOLORED AND A MAJORITY SHOW KAOLINIZATION. ROCK SHOWS SEVERE LOSS OF STRENGTH AND CAN BE EXCAVATED WITH A GEOLOGIST'S PICK. ROCK GIVES "CLUNK" SOUND WHEN STRUCK. IF TESTED, WOULD YIELD SPT REFUSAL | | | | DIP & DIP DIRECTION OF ROCK STRUCTURES | | | |
| PRIMARY SOIL TYPE COMPACTNESS OR CONSISTENCY RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE) RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/FT ²) | | | | RECOMMENDATION SYMBOLS | | | | ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. ROCK FABRIC CLEAR AND EVIDENT BUT REDUCED IN STRENGTH TO STRONG SOIL. IN GRANITOID ROCKS ALL FELDSPARS ARE KAOLINIZED TO SOME EXTENT. SOME FRAGMENTS OF STRONG ROCK USUALLY REMAIN. IF TESTED, WOULD YIELD SPT N VALUES > 100 BPF | | | | SLOPE INDICATOR INSTALLATION | | | |
| GENERALLY GRANULAR MATERIAL (NON-COHESIVE) VERY LOOSE MEDIUM DENSE DENSE VERY DENSE | | | | RECOMMENDATION SYMBOLS | | | | ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. ROCK FABRIC ELEMENTS ARE DISCERNIBLE BUT MASS IS EFFECTIVELY REDUCED TO SOIL STATUS, WITH ONLY FRAGMENTS OF STRONG ROCK REMAINING. SAPROLITE IS AN EXAMPLE OF ROCK WEATHERED TO A DEGREE THAT ONLY MINOR VESTIGES OF ORIGINAL ROCK FABRIC REMAIN. IF TESTED, WOULD YIELD SPT N VALUES < 100 BPF | | | | CONE PENETROMETER TEST | | | |
| GENERALLY SILT-CLAY MATERIAL (COHESIVE) VERY SOFT MEDIUM STIFF STIFF VERY STIFF HARD | | | | RECOMMENDATION SYMBOLS | | | | ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. QUARTZ MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE. | | | | SOUNDING ROD | | | |
| TEXTURE OR GRAIN SIZE | | | | ABBREVIATIONS | | | | ROCK REDUCED TO SOIL. ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. QUARTZ MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE. | | | | TEST BORING WITH CORE | | | |
| U.S. STD. SIEVE SIZE OPENING (MM) 4 10 40 60 200 270 4.76 2.00 0.42 0.25 0.075 0.053 | | | | ABBREVIATIONS | | | | ROCK REDUCED TO SOIL. ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. QUARTZ MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE. | | | | SPT N-VALUE | | | |
| BOULDER (BLDR.) COBBLE (COB.) GRAVEL (GR.) COARSE SAND (CSE. SD.) FINE SAND (F. SD.) SILT (SL.) CLAY (CL.) | | | | ABBREVIATIONS | | | | ROCK REDUCED TO SOIL. ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. QUARTZ MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE. | | | | ROCK HARDNESS | | | |
| GRAIN SIZE MM IN. 305 75 2.0 0.25 0.05 0.005 | | | | ABBREVIATIONS | | | | ROCK REDUCED TO SOIL. ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. QUARTZ MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE. | | | | VERY HARD CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF HAND SPECIMENS REQUIRES SEVERAL HARD BLOWS OF THE GEOLOGIST'S PICK. | | | |
| SOIL MOISTURE - CORRELATION OF TERMS | | | | EQUIPMENT USED ON SUBJECT PROJECT | | | | ROCK REDUCED TO SOIL. ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. QUARTZ MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE. | | | | HARD CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH HAND SPECIMEN. | | | |
| SOIL MOISTURE SCALE (ATTERBERG LIMITS) FIELD MOISTURE DESCRIPTION GUIDE FOR FIELD MOISTURE DESCRIPTION | | | | EQUIPMENT USED ON SUBJECT PROJECT | | | | ROCK REDUCED TO SOIL. ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. QUARTZ MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE. | | | | MODERATELY HARD CAN BE SCRATCHED BY KNIFE OR PICK. GOUGES OR GROOVES TO 0.25 INCHES DEEP CAN BE EXCAVATED BY HARD BLOW OF A GEOLOGIST'S PICK. HAND SPECIMENS CAN BE DETACHED BY MODERATE BLOWS. | | | |
| LL LIQUID LIMIT PLASTIC RANGE (PI) PL PLASTIC LIMIT OM OPTIMUM MOISTURE SL SHRINKAGE LIMIT | | | | EQUIPMENT USED ON SUBJECT PROJECT | | | | ROCK REDUCED TO SOIL. ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. QUARTZ MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE. | | | | MEDIUM HARD CAN BE GROOVED OR GOUGED 0.05 INCHES DEEP BY FIRM PRESSURE OF KNIFE OR PICK POINT. CAN BE EXCAVATED IN SMALL CHIPS TO PIECES 1 INCH MAXIMUM SIZE BY HARD BLOWS OF THE POINT OF A GEOLOGIST'S PICK. | | | |
| - SATURATED - (SAT.) USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE | | | | EQUIPMENT USED ON SUBJECT PROJECT | | | | ROCK REDUCED TO SOIL. ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. QUARTZ MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE. | | | | SOFT CAN BE GROVED OR GOUGED READILY BY KNIFE OR PICK. CAN BE EXCAVATED IN FRAGMENTS FROM CHIPS TO SEVERAL INCHES IN SIZE BY MODERATE BLOWS OF A PICK POINT. SMALL, THIN PIECES CAN BE BROKEN BY FINGER PRESSURE. | | | |
| - WET - (W) SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE | | | | EQUIPMENT USED ON SUBJECT PROJECT | | | | ROCK REDUCED TO SOIL. ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. QUARTZ MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE. | | | | VERY SOFT CAN BE CARVED WITH KNIFE. CAN BE EXCAVATED READILY WITH POINT OF PICK. PIECES 1 INCH OR MORE IN THICKNESS CAN BE BROKEN BY FINGER PRESSURE. CAN BE SCRATCHED READILY BY FINGER NAIL. | | | |
| - MOIST - (M) SOLID; AT OR NEAR OPTIMUM MOISTURE | | | | EQUIPMENT USED ON SUBJECT PROJECT | | | | ROCK REDUCED TO SOIL. ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. QUARTZ MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE. | | | | FRACTURE SPACING | | | |
| - DRY - (D) REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE | | | | EQUIPMENT USED ON SUBJECT PROJECT | | | | ROCK REDUCED TO SOIL. ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. QUARTZ MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE. | | | | BEDDING | | | |
| PLASTICITY | | | | EQUIPMENT USED ON SUBJECT PROJECT | | | | ROCK REDUCED TO SOIL. ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. QUARTZ MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE. | | | | TERM THICKNESS | | | |
| NON PLASTIC 0-5 DRY STRENGTH VERY LOW SLIGHT MEDIUM HIGH | | | | EQUIPMENT USED ON SUBJECT PROJECT | | | | ROCK REDUCED TO SOIL. ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. QUARTZ MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE. | | | | VERY THICKLY BEDDED 4 FEET | | | |
| COLOR | | | | EQUIPMENT USED ON SUBJECT PROJECT | | | | ROCK REDUCED TO SOIL. ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. QUARTZ MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE. | | | | THICKLY BEDDED 1.5 - 4 FEET | | | |
| NON PLASTIC 0-5 DRY STRENGTH VERY LOW SLIGHT MEDIUM HIGH | | | | EQUIPMENT USED ON SUBJECT PROJECT | | | | ROCK REDUCED TO SOIL. ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. QUARTZ MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE. | | | | THINLY BEDDED 0.16 - 1.5 FEET | | | |
| MODERATELY PLASTIC 16-25 DRY STRENGTH MEDIUM HIGH | | | | EQUIPMENT USED ON SUBJECT PROJECT | | | | ROCK REDUCED TO SOIL. ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. QUARTZ MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE. | | | | VERY THINLY BEDDED 0.03 - 0.16 FEET | | | |
| HIGHLY PLASTIC 26 OR MORE DRY STRENGTH HIGH | | | | EQUIPMENT USED ON SUBJECT PROJECT | | | | ROCK REDUCED TO SOIL. ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. QUARTZ MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE. | | | | THICKLY LAMINATED 0.008 - 0.03 FEET | | | |
| DESCRIPTIONS MAY INCLUDE COLOR OR COLOR COMBINATIONS (TAN, RED, YELLOW-BROWN, BLUE-GRAY). MODIFIERS SUCH AS LIGHT, DARK, STREAKED, ETC. ARE USED TO DESCRIBE APPEARANCE. | | | | EQUIPMENT USED ON SUBJECT PROJECT | | | | ROCK REDUCED TO SOIL. ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. QUARTZ MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE. | | | | THINLY LAMINATED < 0.008 FEET | | | |

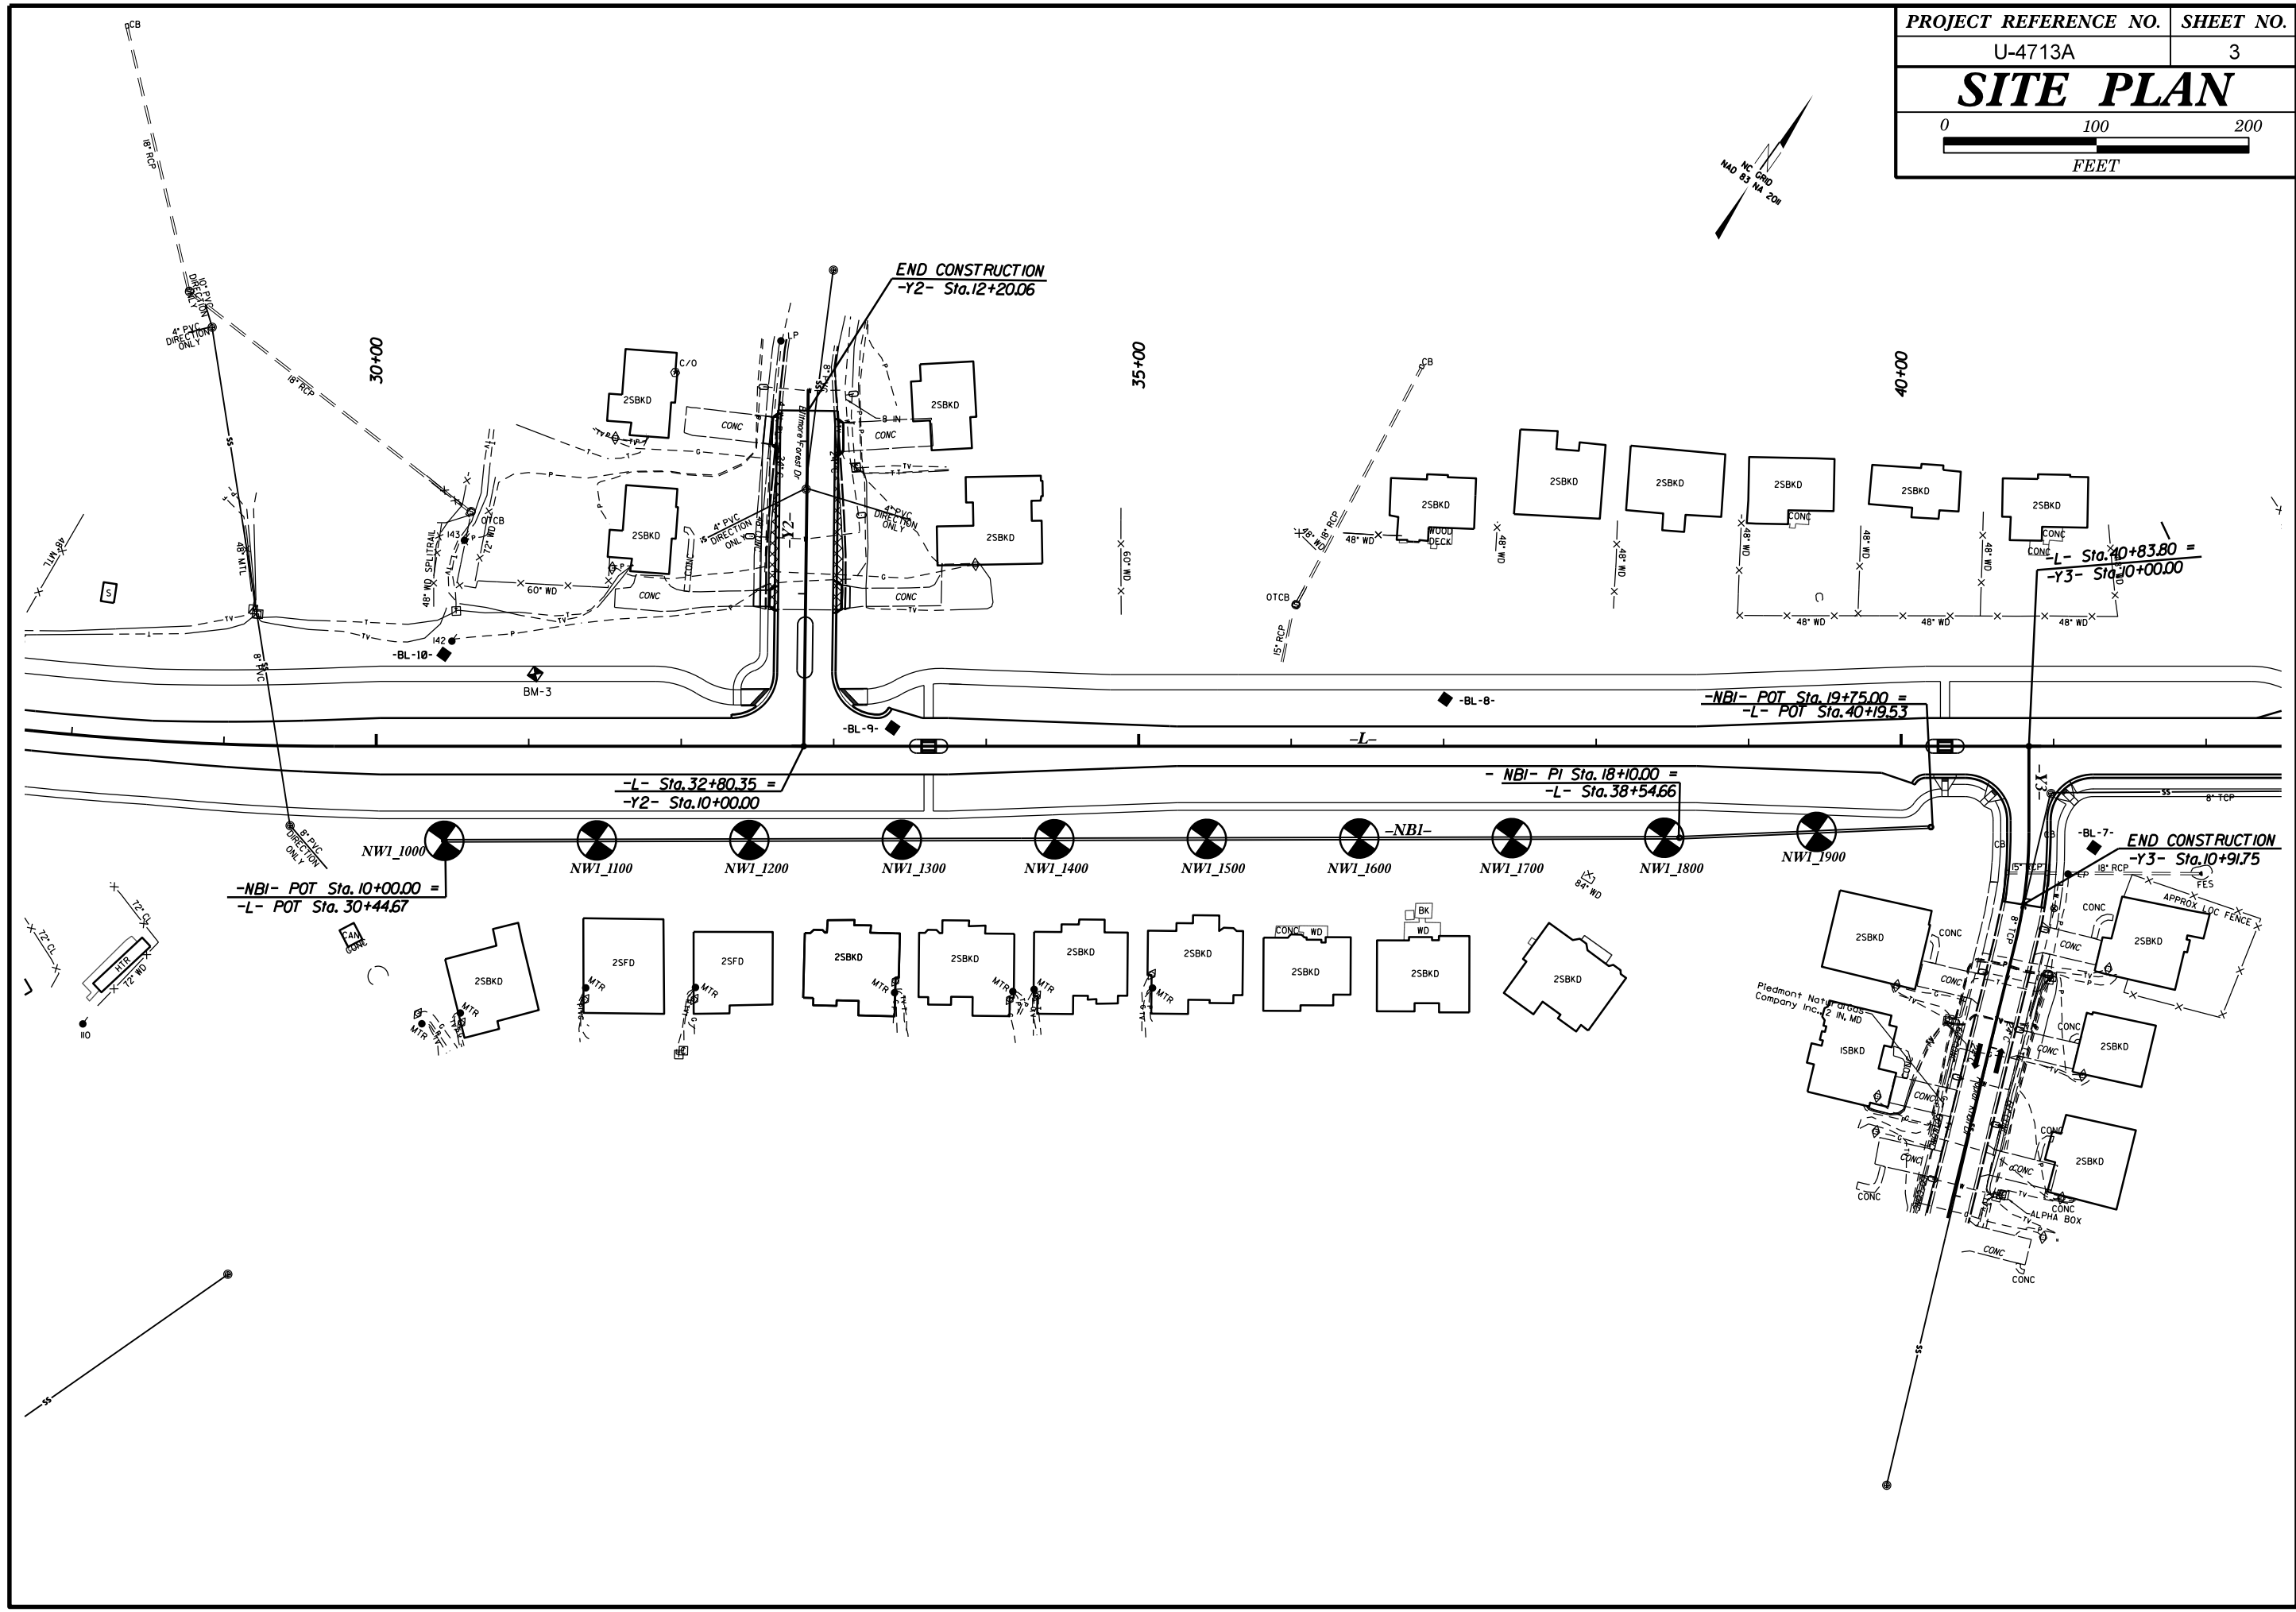

END CONSTRUCTION
-Y2- Sta.12+20.06

-L- Sta.40+83.80 =
-Y3- Sta.40+00.00

-NBI- POT Sta.19+75.00 =
-L- POT Sta.40+19.53

-L- Sta.32+80.35 =
-Y2- Sta.10+00.00

-NBI- PI Sta.18+10.00 =
-L- Sta.38+54.66

-NBI- POT Sta.10+00.00 =
-L- POT Sta.30+44.67

END CONSTRUCTION
-Y3- Sta.10+91.75


NW1_1000 NW1_1100 NW1_1200 NW1_1300 NW1_1400 NW1_1500 NW1_1600 -NBI- NW1_1700 NW1_1800 NW1_1900

Piedmont Natural Gas
Company Inc. 2 IN. MD

ALPHA BOX

5/14/99

| | |
|---|---------------------|
| PROJECT REFERENCE NO. U-4713A | SHEET NO. 4 |
| ROADWAY DESIGN ENGINEER | HYDRAULICS ENGINEER |
| INCOMPLETE PLANS DO NOT USE FOR R/W ACQUISITION | |
| DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED | |

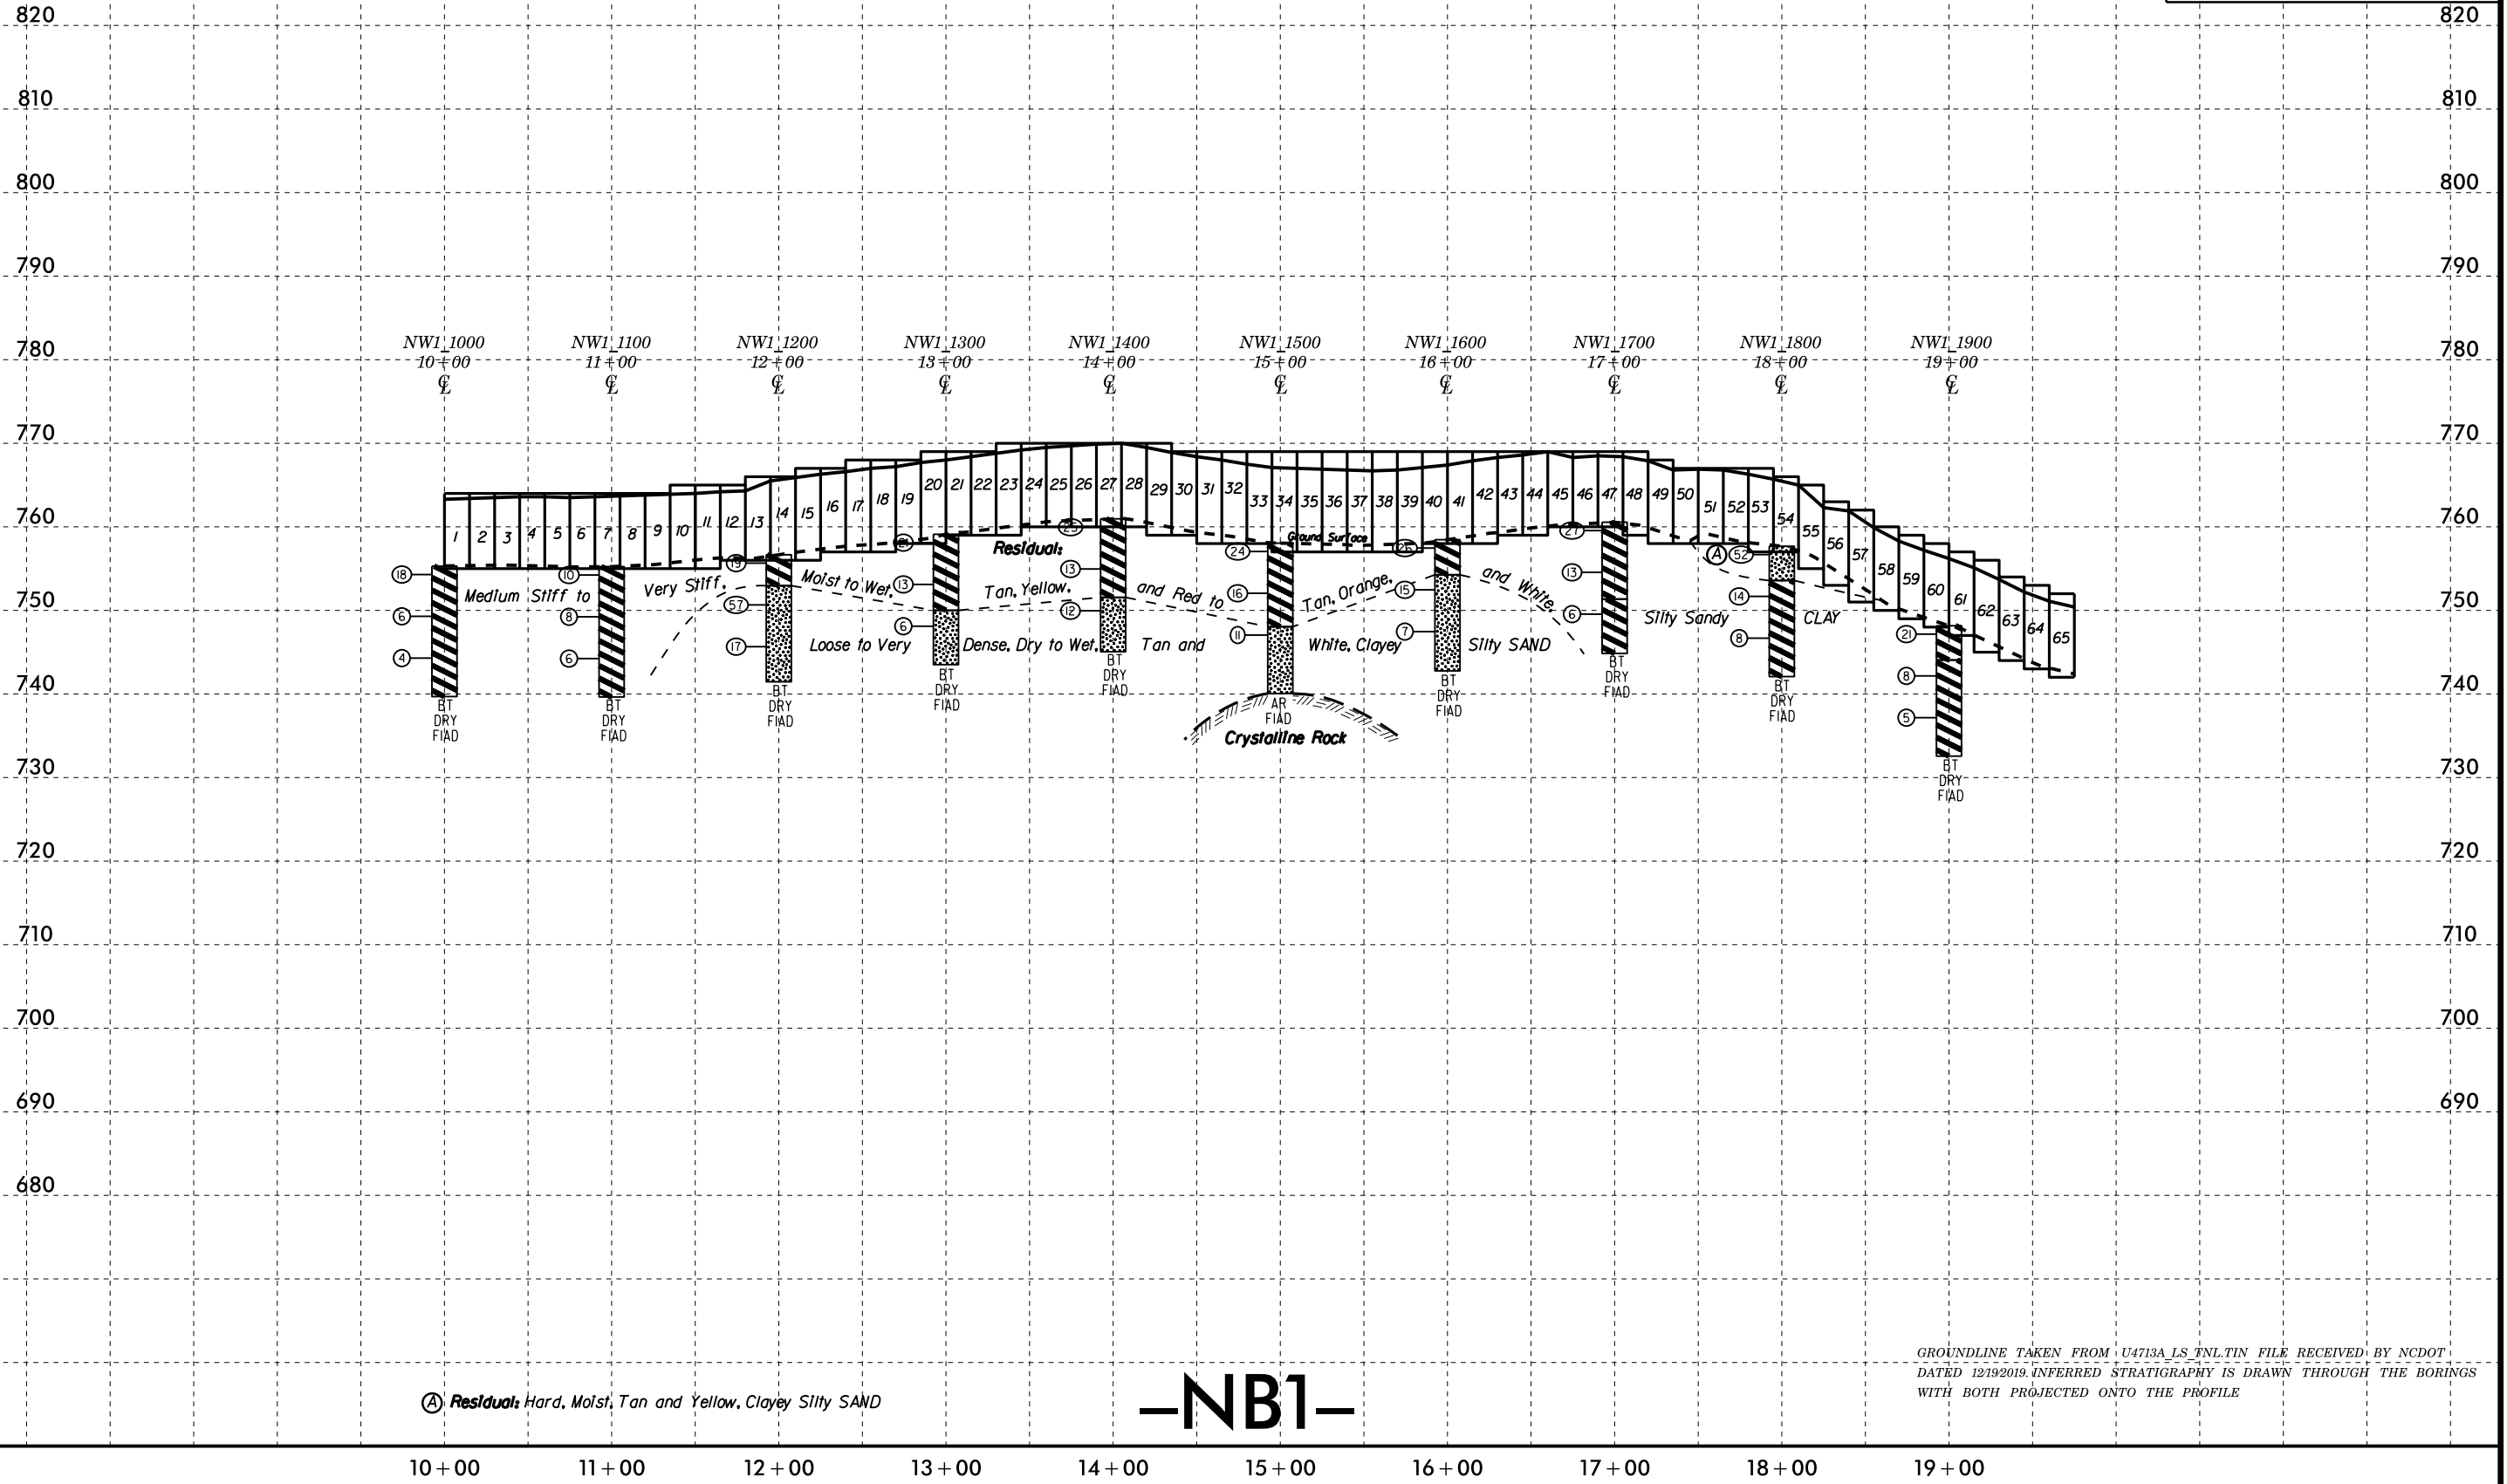

I:\JAN-2020\56X-0369 (NCDDT-U4713A) MECKLENBURG CO. CADD\U4713A_GEO_SWAL\CADD_GEO\TECHN\Site\Sub\U4713A_geo_pf1_SWAL.dgn
5/14/99
6/26/2019
6/26/2019
6/26/2019

Ⓐ Residual: Hard, Moist, Tan and Yellow, Clayey Silty SAND

-NB1-

GROUNDLINE TAKEN FROM U4713A_LS_TNL.TIN FILE RECEIVED BY NCDOT
DATED 12/19/2019. INFERRED STRATIGRAPHY IS DRAWN THROUGH THE BORINGS
WITH BOTH PROJECTED ONTO THE PROFILE

GEOTECHNICAL BORING REPORT

BORE LOG

| WBS 39077.1.2 | | TIP U-4713A | | COUNTY MECKLENBURG | | GEOLOGIST Stickney, J. K. | | | | | | | | | |
|--|-----------------|---------------------|------------|--------------------------|-------|---------------------------|-----------------|----|----|-----|-----------|-----|---------------------------|------------|-----|
| SITE DESCRIPTION Noise Wall on SR 3440 (Mckee Rd.) to SR 1009 (Monroe Rd.) | | | | | | | GROUND WTR (ft) | | | | | | | | |
| BORING NO. NW1_1000 | | STATION 10+00 | | OFFSET CL | | ALIGNMENT -NB1- | | | | | | | | | |
| COLLAR ELEV. 755.3 ft | | TOTAL DEPTH 15.6 ft | | NORTHING 491,001 | | EASTING 1,488,817 | | | | | | | | | |
| DRILL RIG/HAMMER EFF./DATE HFC0070 CME-550X 81% 06/04/2018 | | | | DRILL METHOD H.S. Augers | | HAMMER TYPE Automatic | | | | | | | | | |
| DRILLER Foster, B.E. | | START DATE 11/21/19 | | COMP. DATE 11/22/19 | | SURFACE WATER DEPTH N/A | | | | | | | | | |
| ELEV (ft) | DRIVE ELEV (ft) | DEPTH (ft) | BLOW COUNT | | | BLOWS PER FOOT | | | | | SAMP. NO. | LOG | SOIL AND ROCK DESCRIPTION | DEPTH (ft) | |
| | | | 0.5ft | 0.5ft | 0.5ft | 0 | 25 | 50 | 75 | 100 | | | | | |
| 760 | | | | | | | | | | | | | | | |
| 755 | 755.3 | 0.0 | 5 | 6 | 12 | | | | | | | | | 755.3 | 0.0 |
| 750 | 750.3 | 5.0 | 1 | 2 | 4 | | | | | | | | | | |
| 745 | 745.3 | 10.0 | 2 | 2 | 2 | | | | | | | | | | |
| 740 | | | | | | | | | | | | | | | |
| Boring Terminated at Elevation 739.7 ft in Residual (Silty Sandy CLAY) | | | | | | | | | | | | | | | |

| WBS 39077.1.2 | | TIP U-4713A | | COUNTY MECKLENBURG | | GEOLOGIST Stickney, J. K. | | | | | | | | | |
|--|-----------------|---------------------|------------|--------------------------|-------|---------------------------|-----------------|----|----|-----|-----------|-----|---------------------------|------------|-----|
| SITE DESCRIPTION Noise Wall on SR 3440 (Mckee Rd.) to SR 1009 (Monroe Rd.) | | | | | | | GROUND WTR (ft) | | | | | | | | |
| BORING NO. NW1_1100 | | STATION 11+00 | | OFFSET CL | | ALIGNMENT -NB1- | | | | | | | | | |
| COLLAR ELEV. 755.2 ft | | TOTAL DEPTH 15.6 ft | | NORTHING 491,059 | | EASTING 1,488,898 | | | | | | | | | |
| DRILL RIG/HAMMER EFF./DATE HFC0070 CME-550X 81% 06/04/2018 | | | | DRILL METHOD H.S. Augers | | HAMMER TYPE Automatic | | | | | | | | | |
| DRILLER Foster, B.E. | | START DATE 11/21/19 | | COMP. DATE 11/22/19 | | SURFACE WATER DEPTH N/A | | | | | | | | | |
| ELEV (ft) | DRIVE ELEV (ft) | DEPTH (ft) | BLOW COUNT | | | BLOWS PER FOOT | | | | | SAMP. NO. | LOG | SOIL AND ROCK DESCRIPTION | DEPTH (ft) | |
| | | | 0.5ft | 0.5ft | 0.5ft | 0 | 25 | 50 | 75 | 100 | | | | | |
| 760 | | | | | | | | | | | | | | | |
| 755 | 755.2 | 0.0 | 2 | 3 | 7 | | | | | | | | | 755.2 | 0.0 |
| 750 | 750.2 | 5.0 | 2 | 3 | 5 | | | | | | | | | | |
| 745 | 745.2 | 10.0 | 3 | 3 | 3 | | | | | | | | | | |
| 740 | | | | | | | | | | | | | | | |
| Boring Terminated at Elevation 739.6 ft in Residual (Silty Sandy CLAY) | | | | | | | | | | | | | | | |

GEOTECHNICAL BORING REPORT BORE LOG

| WBS 39077.1.2 | | TIP U-4713A | | COUNTY MECKLENBURG | | GEOLOGIST Stickney, J. K. | | | | | | | | | |
|--|-----------------|---------------------|------------|--------------------------|-------|---------------------------|-----------------|----|----|-----|-----------|---------|---------------------------|--|------|
| SITE DESCRIPTION Noise Wall on SR 3440 (Mckee Rd.) to SR 1009 (Monroe Rd.) | | | | | | | GROUND WTR (ft) | | | | | | | | |
| BORING NO. NW1_1200 | | STATION 12+00 | | OFFSET CL | | ALIGNMENT -NB1- | | | | | | | | | |
| COLLAR ELEV. 756.7 ft | | TOTAL DEPTH 15.2 ft | | NORTHING 491,118 | | EASTING 1,488,980 | | | | | | | | | |
| DRILL RIG/HAMMER EFF./DATE HFC0070 CME-550X 81% 06/04/2018 | | | | DRILL METHOD H.S. Augers | | HAMMER TYPE Automatic | | | | | | | | | |
| DRILLER Foster, B.E. | | START DATE 11/21/19 | | COMP. DATE 11/22/19 | | SURFACE WATER DEPTH N/A | | | | | | | | | |
| ELEV (ft) | DRIVE ELEV (ft) | DEPTH (ft) | BLOW COUNT | | | BLOWS PER FOOT | | | | | SAMP. NO. | LOG MOI | SOIL AND ROCK DESCRIPTION | DEPTH (ft) | |
| | | | 0.5ft | 0.5ft | 0.5ft | 0 | 25 | 50 | 75 | 100 | | | | | |
| 760 | | | | | | | | | | | | | | | |
| | 756.7 | 0.0 | | | | | | | | | | | | 756.7 | 0.0 |
| 755 | | | 8 | 9 | 10 | | | | | | | | M | RESIDUAL Tan, Yellow, and Red, Silty Sandy CLAY | |
| | 751.7 | 5.0 | | | | | | | | | | | | 753.0 | 3.7 |
| 750 | | | 10 | 15 | 42 | | | | | | | | D | Tan and White, Clayey Silty SAND | |
| | 746.7 | 10.0 | | | | | | | | | | | | | |
| 745 | | | 9 | 9 | 8 | | | | | | | | W | | |
| | | | | | | | | | | | | | | 741.5 | 15.2 |
| Boring Terminated at Elevation 741.5 ft in Residual (Clayey Silty SAND) | | | | | | | | | | | | | | | |

| WBS 39077.1.2 | | TIP U-4713A | | COUNTY MECKLENBURG | | GEOLOGIST Stickney, J. K. | | | | | | | | | |
|--|-----------------|---------------------|------------|--------------------------|-------|---------------------------|-----------------|----|----|-----|-----------|---------|---------------------------|--|------|
| SITE DESCRIPTION Noise Wall on SR 3440 (Mckee Rd.) to SR 1009 (Monroe Rd.) | | | | | | | GROUND WTR (ft) | | | | | | | | |
| BORING NO. NW1_1300 | | STATION 13+00 | | OFFSET CL | | ALIGNMENT -NB1- | | | | | | | | | |
| COLLAR ELEV. 759.1 ft | | TOTAL DEPTH 15.6 ft | | NORTHING 491,176 | | EASTING 1,489,061 | | | | | | | | | |
| DRILL RIG/HAMMER EFF./DATE HFC0070 CME-550X 81% 06/04/2018 | | | | DRILL METHOD H.S. Augers | | HAMMER TYPE Automatic | | | | | | | | | |
| DRILLER Foster, B.E. | | START DATE 11/21/19 | | COMP. DATE 11/22/19 | | SURFACE WATER DEPTH N/A | | | | | | | | | |
| ELEV (ft) | DRIVE ELEV (ft) | DEPTH (ft) | BLOW COUNT | | | BLOWS PER FOOT | | | | | SAMP. NO. | LOG MOI | SOIL AND ROCK DESCRIPTION | DEPTH (ft) | |
| | | | 0.5ft | 0.5ft | 0.5ft | 0 | 25 | 50 | 75 | 100 | | | | | |
| 760 | | | | | | | | | | | | | | | |
| | 759.1 | 0.0 | | | | | | | | | | | | 759.1 | 0.0 |
| 755 | | | 5 | 10 | 11 | | | | | | | | M | RESIDUAL Tan, Yellow, and Red, Silty Sandy CLAY | |
| | 754.1 | 5.0 | | | | | | | | | | | | | |
| 750 | | | 4 | 6 | 7 | | | | | | | | M | | |
| | 749.1 | 10.0 | | | | | | | | | | | | 750.0 | 9.1 |
| 745 | | | 2 | 3 | 3 | | | | | | | | W | Tan and White, Clayey Silty SAND | |
| | | | | | | | | | | | | | | 743.5 | 15.6 |
| Boring Terminated at Elevation 743.5 ft in Residual (Clayey Silty SAND) | | | | | | | | | | | | | | | |

NCDOT BORE DOUBLE U4713_GEO_BH_SWALL.GPJ NC_DOT.GDT 1/8/20

GEOTECHNICAL BORING REPORT

BORE LOG

| WBS 39077.1.2 | | TIP U-4713A | | COUNTY MECKLENBURG | | GEOLOGIST Stickney, J. K. | | | | | | | | | |
|--|-----------------|---------------------|------------|--------------------------|-------|---------------------------|-----------------|----|----|-----|-----------|-----|---------------------------|--|-------|
| SITE DESCRIPTION Noise Wall on SR 3440 (Mckee Rd.) to SR 1009 (Monroe Rd.) | | | | | | | GROUND WTR (ft) | | | | | | | | |
| BORING NO. NW1_1400 | | STATION 14+00 | | OFFSET CL | | ALIGNMENT -NB1- | | | | | | | | | |
| COLLAR ELEV. 761.0 ft | | TOTAL DEPTH 15.9 ft | | NORTHING 491,234 | | EASTING 1,489,143 | | | | | | | | | |
| DRILL RIG/HAMMER EFF./DATE HFC0070 CME-550X 81% 06/04/2018 | | | | DRILL METHOD H.S. Augers | | HAMMER TYPE Automatic | | | | | | | | | |
| DRILLER Foster, B.E. | | START DATE 11/21/19 | | COMP. DATE 11/22/19 | | SURFACE WATER DEPTH N/A | | | | | | | | | |
| ELEV (ft) | DRIVE ELEV (ft) | DEPTH (ft) | BLOW COUNT | | | BLOWS PER FOOT | | | | | SAMP. NO. | LOG | SOIL AND ROCK DESCRIPTION | DEPTH (ft) | |
| | | | 0.5ft | 0.5ft | 0.5ft | 0 | 25 | 50 | 75 | 100 | | | | | |
| 765 | | | | | | | | | | | | | | | |
| 760 | 761.0 | 0.0 | 6 | 10 | 15 | | | | | | | | M | GROUND SURFACE RESIDUAL Tan, Yellow, and Red, Silty Sandy CLAY | 0.0 |
| 755 | 756.0 | 5.0 | 5 | 6 | 7 | | | | | | | | M | | |
| 750 | 751.0 | 10.0 | 5 | 5 | 7 | | | | | | | | W | Tan and White Clayey Silty SAND | 9.4 |
| | | | | | | | | | | | | | | | 745.1 |
| Boring Terminated at Elevation 745.1 ft in Residual (Clayey Silty SAND) | | | | | | | | | | | | | | | |

| WBS 39077.1.2 | | TIP U-4713A | | COUNTY MECKLENBURG | | GEOLOGIST Stickney, J. K. | | | | | | | | | |
|--|-----------------|---------------------|------------|--------------------------|-------|---------------------------|-----------------|----|----|-----|-----------|-----|---------------------------|--|-------|
| SITE DESCRIPTION Noise Wall on SR 3440 (Mckee Rd.) to SR 1009 (Monroe Rd.) | | | | | | | GROUND WTR (ft) | | | | | | | | |
| BORING NO. NW1_1500 | | STATION 15+00 | | OFFSET CL | | ALIGNMENT -NB1- | | | | | | | | | |
| COLLAR ELEV. 758.1 ft | | TOTAL DEPTH 18.0 ft | | NORTHING 491,292 | | EASTING 1,489,224 | | | | | | | | | |
| DRILL RIG/HAMMER EFF./DATE HFC0070 CME-550X 81% 06/04/2018 | | | | DRILL METHOD H.S. Augers | | HAMMER TYPE Automatic | | | | | | | | | |
| DRILLER Foster, B.E. | | START DATE 11/21/19 | | COMP. DATE 11/22/19 | | SURFACE WATER DEPTH N/A | | | | | | | | | |
| ELEV (ft) | DRIVE ELEV (ft) | DEPTH (ft) | BLOW COUNT | | | BLOWS PER FOOT | | | | | SAMP. NO. | LOG | SOIL AND ROCK DESCRIPTION | DEPTH (ft) | |
| | | | 0.5ft | 0.5ft | 0.5ft | 0 | 25 | 50 | 75 | 100 | | | | | |
| 760 | | | | | | | | | | | | | | | |
| 755 | 758.1 | 0.0 | 5 | 10 | 14 | | | | | | | | M | GROUND SURFACE RESIDUAL Tan, Yellow, and Red, Silty Sandy CLAY | 0.0 |
| 750 | 753.1 | 5.0 | 4 | 6 | 10 | | | | | | | | M | | |
| 745 | 748.1 | 10.0 | 3 | 5 | 6 | | | | | | | | W | Tan and White, Clayey Silty SAND | 10.0 |
| | | | | | | | | | | | | | | | 740.1 |
| Boring Terminated by Auger Refusal at Elevation 740.1 ft on Crystalline Rock | | | | | | | | | | | | | | | |

NCDOT BORE DOUBLE U4713_GEO_BH_SWALL.GPJ NC_DOT.GDT 1/8/20

GEOTECHNICAL BORING REPORT

BORE LOG

| | | | | | | | |
|--|--|---------------------|--|--------------------------|--|---------------------------|-----------------|
| WBS 39077.1.2 | | TIP U-4713A | | COUNTY MECKLENBURG | | GEOLOGIST Stickney, J. K. | |
| SITE DESCRIPTION Noise Wall on SR 3440 (Mckee Rd.) to SR 1009 (Monroe Rd.) | | | | | | | GROUND WTR (ft) |
| BORING NO. NW1_1600 | | STATION 16+00 | | OFFSET CL | | ALIGNMENT -NB1- | |
| COLLAR ELEV. 758.5 ft | | TOTAL DEPTH 15.7 ft | | NORTHING 491,350 | | EASTING 1,489,306 | |
| DRILL RIG/HAMMER EFF./DATE HFC0070 CME-550X 81% 06/04/2018 | | | | DRILL METHOD H.S. Augers | | HAMMER TYPE Automatic | |
| DRILLER Foster, B.E. | | START DATE 11/21/19 | | COMP. DATE 11/22/19 | | SURFACE WATER DEPTH N/A | |

| ELEV (ft) | DRIVE ELEV (ft) | DEPTH (ft) | BLOW COUNT | | | BLOWS PER FOOT | | | | | SAMP. NO. | LOG MOI | LOG | SOIL AND ROCK DESCRIPTION | | | |
|-----------|-----------------|------------|------------|-------|-------|----------------|----|----|----|-----|-----------|---------|-----|---------------------------|------------|-----|---|
| | | | 0.5ft | 0.5ft | 0.5ft | 0 | 25 | 50 | 75 | 100 | | | | ELEV. (ft) | DEPTH (ft) | | |
| 760 | 758.5 | 0.0 | | | | | | | | | | | | | 758.5 | 0.0 | GROUND SURFACE |
| 755 | 753.5 | 5.0 | 10 | 12 | 14 | | | | | | | | | M | 754.3 | 4.2 | RESIDUAL Tan, Yellow, and Red, Silty Sandy CLAY |
| 750 | 748.5 | 10.0 | 5 | 7 | 8 | | | | | | | | | M | | | Tan and White, Clayey Silty SAND |
| 745 | | | 2 | 3 | 4 | | | | | | | | | M | | | Boring Terminated at Elevation 742.8 ft in Residual (Clayey Silty SAND) |

| | | | | | | | |
|--|--|---------------------|--|--------------------------|--|---------------------------|-----------------|
| WBS 39077.1.2 | | TIP U-4713A | | COUNTY MECKLENBURG | | GEOLOGIST Stickney, J. K. | |
| SITE DESCRIPTION Noise Wall on SR 3440 (Mckee Rd.) to SR 1009 (Monroe Rd.) | | | | | | | GROUND WTR (ft) |
| BORING NO. NW1_1700 | | STATION 17+00 | | OFFSET CL | | ALIGNMENT -NB1- | |
| COLLAR ELEV. 760.6 ft | | TOTAL DEPTH 15.7 ft | | NORTHING 491,408 | | EASTING 1,489,387 | |
| DRILL RIG/HAMMER EFF./DATE HFC0070 CME-550X 81% 06/04/2018 | | | | DRILL METHOD H.S. Augers | | HAMMER TYPE Automatic | |
| DRILLER Foster, B.E. | | START DATE 11/21/19 | | COMP. DATE 11/22/19 | | SURFACE WATER DEPTH N/A | |

| ELEV (ft) | DRIVE ELEV (ft) | DEPTH (ft) | BLOW COUNT | | | BLOWS PER FOOT | | | | | SAMP. NO. | LOG MOI | LOG | SOIL AND ROCK DESCRIPTION | | | |
|-----------|-----------------|------------|------------|-------|-------|----------------|----|----|----|-----|-----------|---------|-----|---------------------------|------------|------|--|
| | | | 0.5ft | 0.5ft | 0.5ft | 0 | 25 | 50 | 75 | 100 | | | | ELEV. (ft) | DEPTH (ft) | | |
| 765 | | | | | | | | | | | | | | | | | |
| 760 | 760.6 | 0.0 | | | | | | | | | | | | | 760.6 | 0.0 | GROUND SURFACE |
| 755 | 755.6 | 5.0 | 4 | 11 | 16 | | | | | | | | | M | | | RESIDUAL Tan, Orange, and White, Silty Sandy CLAY |
| 750 | 750.6 | 10.0 | 3 | 6 | 7 | | | | | | | | | M | | | |
| 745 | | | 2 | 3 | 3 | | | | | | | | | W | | | Orange and White, Silty Sandy CLAY |
| | | | | | | | | | | | | | | | 744.9 | 15.7 | Boring Terminated at Elevation 744.9 ft in Residual (Silty Sandy CLAY) |

NCDOT BORE DOUBLE U4713_GEO_BH_SWall.GPJ NC_DOT.GDT 1/13/20

GEOTECHNICAL BORING REPORT BORE LOG

| WBS 39077.1.2 | | TIP U-4713A | | COUNTY MECKLENBURG | | GEOLOGIST Stickney, J. K. | | | | | | | | | | | |
|--|-----------------|---------------------|------------|--------------------------|-------|---------------------------|-----------------|-----|-----|-----|-----------|-----|---------------------------|---|------|--|--|
| SITE DESCRIPTION Noise Wall on SR 3440 (Mckee Rd.) to SR 1009 (Monroe Rd.) | | | | | | | GROUND WTR (ft) | | | | | | | | | | |
| BORING NO. NW1_1800 | | STATION 18+00 | | OFFSET CL | | ALIGNMENT -NB1- | | | | | | | | | | | |
| COLLAR ELEV. 757.7 ft | | TOTAL DEPTH 15.6 ft | | NORTHING 491,466 | | EASTING 1,489,468 | | | | | | | | | | | |
| DRILL RIG/HAMMER EFF./DATE HFC0070 CME-550X 81% 06/04/2018 | | | | DRILL METHOD H.S. Augers | | HAMMER TYPE Automatic | | | | | | | | | | | |
| DRILLER Foster, B.E. | | START DATE 11/21/19 | | COMP. DATE 11/22/19 | | SURFACE WATER DEPTH N/A | | | | | | | | | | | |
| ELEV (ft) | DRIVE ELEV (ft) | DEPTH (ft) | BLOW COUNT | | | BLOWS PER FOOT | | | | | SAMP. NO. | LOG | SOIL AND ROCK DESCRIPTION | DEPTH (ft) | | | |
| | | | 0.5ft | 0.5ft | 0.5ft | 0 | 25 | 50 | 75 | 100 | | | | | | | |
| 760 | 757.7 | 0.0 | | | | | | | | | | | | | | | |
| 755 | 752.7 | 5.0 | 6 | 22 | 30 | ... | ... | ... | ... | ... | ... | ... | D | RESIDUAL Tan and Yellow, Clayey Silty SAND | 4.1 | | |
| 750 | 747.7 | 10.0 | 6 | 6 | 8 | ... | ... | ... | ... | ... | ... | ... | M | Tan, Orange, and White, Silty SANDY CLAY | 4.1 | | |
| 745 | | | 3 | 3 | 5 | ... | ... | ... | ... | ... | ... | ... | M | | 15.6 | | |
| Boring Terminated at Elevation 742.1 ft in Residual (Silty Sandy CLAY) | | | | | | | | | | | | | | | | | |

| WBS 39077.1.2 | | TIP U-4713A | | COUNTY MECKLENBURG | | GEOLOGIST Stickney, J. K. | | | | | | | | | | | |
|--|-----------------|---------------------|------------|--------------------------|-------|---------------------------|-----------------|-----|-----|-----|-----------|-----|---------------------------|--|------|--|--|
| SITE DESCRIPTION Noise Wall on SR 3440 (Mckee Rd.) to SR 1009 (Monroe Rd.) | | | | | | | GROUND WTR (ft) | | | | | | | | | | |
| BORING NO. NW1_1900 | | STATION 19+00 | | OFFSET CL | | ALIGNMENT -NB1- | | | | | | | | | | | |
| COLLAR ELEV. 748.2 ft | | TOTAL DEPTH 15.6 ft | | NORTHING 491,527 | | EASTING 1,489,548 | | | | | | | | | | | |
| DRILL RIG/HAMMER EFF./DATE HFC0070 CME-550X 81% 06/04/2018 | | | | DRILL METHOD H.S. Augers | | HAMMER TYPE Automatic | | | | | | | | | | | |
| DRILLER Foster, B.E. | | START DATE 11/21/19 | | COMP. DATE 11/22/19 | | SURFACE WATER DEPTH N/A | | | | | | | | | | | |
| ELEV (ft) | DRIVE ELEV (ft) | DEPTH (ft) | BLOW COUNT | | | BLOWS PER FOOT | | | | | SAMP. NO. | LOG | SOIL AND ROCK DESCRIPTION | DEPTH (ft) | | | |
| | | | 0.5ft | 0.5ft | 0.5ft | 0 | 25 | 50 | 75 | 100 | | | | | | | |
| 750 | 748.2 | 0.0 | | | | | | | | | | | | | | | |
| 745 | 743.2 | 5.0 | 4 | 8 | 13 | ... | ... | ... | ... | ... | ... | ... | M | RESIDUAL Tan, Orange, and White, Silty SANDY CLAY with Boulders | 4.1 | | |
| 740 | | | 3 | 4 | 4 | ... | ... | ... | ... | ... | ... | ... | M | Orange and White, Silty SANDY CLAY | 4.1 | | |
| 735 | 738.2 | 10.0 | 2 | 2 | 3 | ... | ... | ... | ... | ... | ... | ... | M | | 15.6 | | |
| Boring Terminated at Elevation 732.6 ft in Residual (Silty SANDY CLAY) | | | | | | | | | | | | | | | | | |

NCDOT BORE DOUBLE U4713_GEO_BH_SWall.GPJ NC_DOT.GDT 1/8/20