

**CUR DATA -L-**  
 Plc 8+56.77  
 $\Delta c = 18^{\circ}56'14.8''$  (LT)  
 D = 06°05'43.1"  
 Lc = 310.6896"  
 Tc = 156.7746"  
 R = 940.0000"  
 SE = EXIST.


**CUR DATA -L-**  
 Plc 13+93.64  
 $\Delta c = 34^{\circ}03'56.3''$  (LT)  
 D = 04°35'01.2"  
 Lc = 743.1970"  
 Tc = 382.9464"  
 R = 1250.0000"  
 V = 50MPH  
 SE = 0.06

NOTE:  
 PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B  
 AND TEMPORARY ROCK SILT CHECKS TYPE - A AT  
 DRAINAGE OUTLETS.

NOTE:  
 UTILIZE TURBIDITY CURTAIN DURING BRIDGE  
 REMOVAL AND CONSTRUCTION WHERE APPLICABLE.


CLEARING AND GRUBBING  
 EROSION CONTROL FOR  
 CONSTRUCTION SHEET 4

HYDRAULICS  
 ENGINEER



10/2/2024

PREPARED BY  
**ARCADIS**

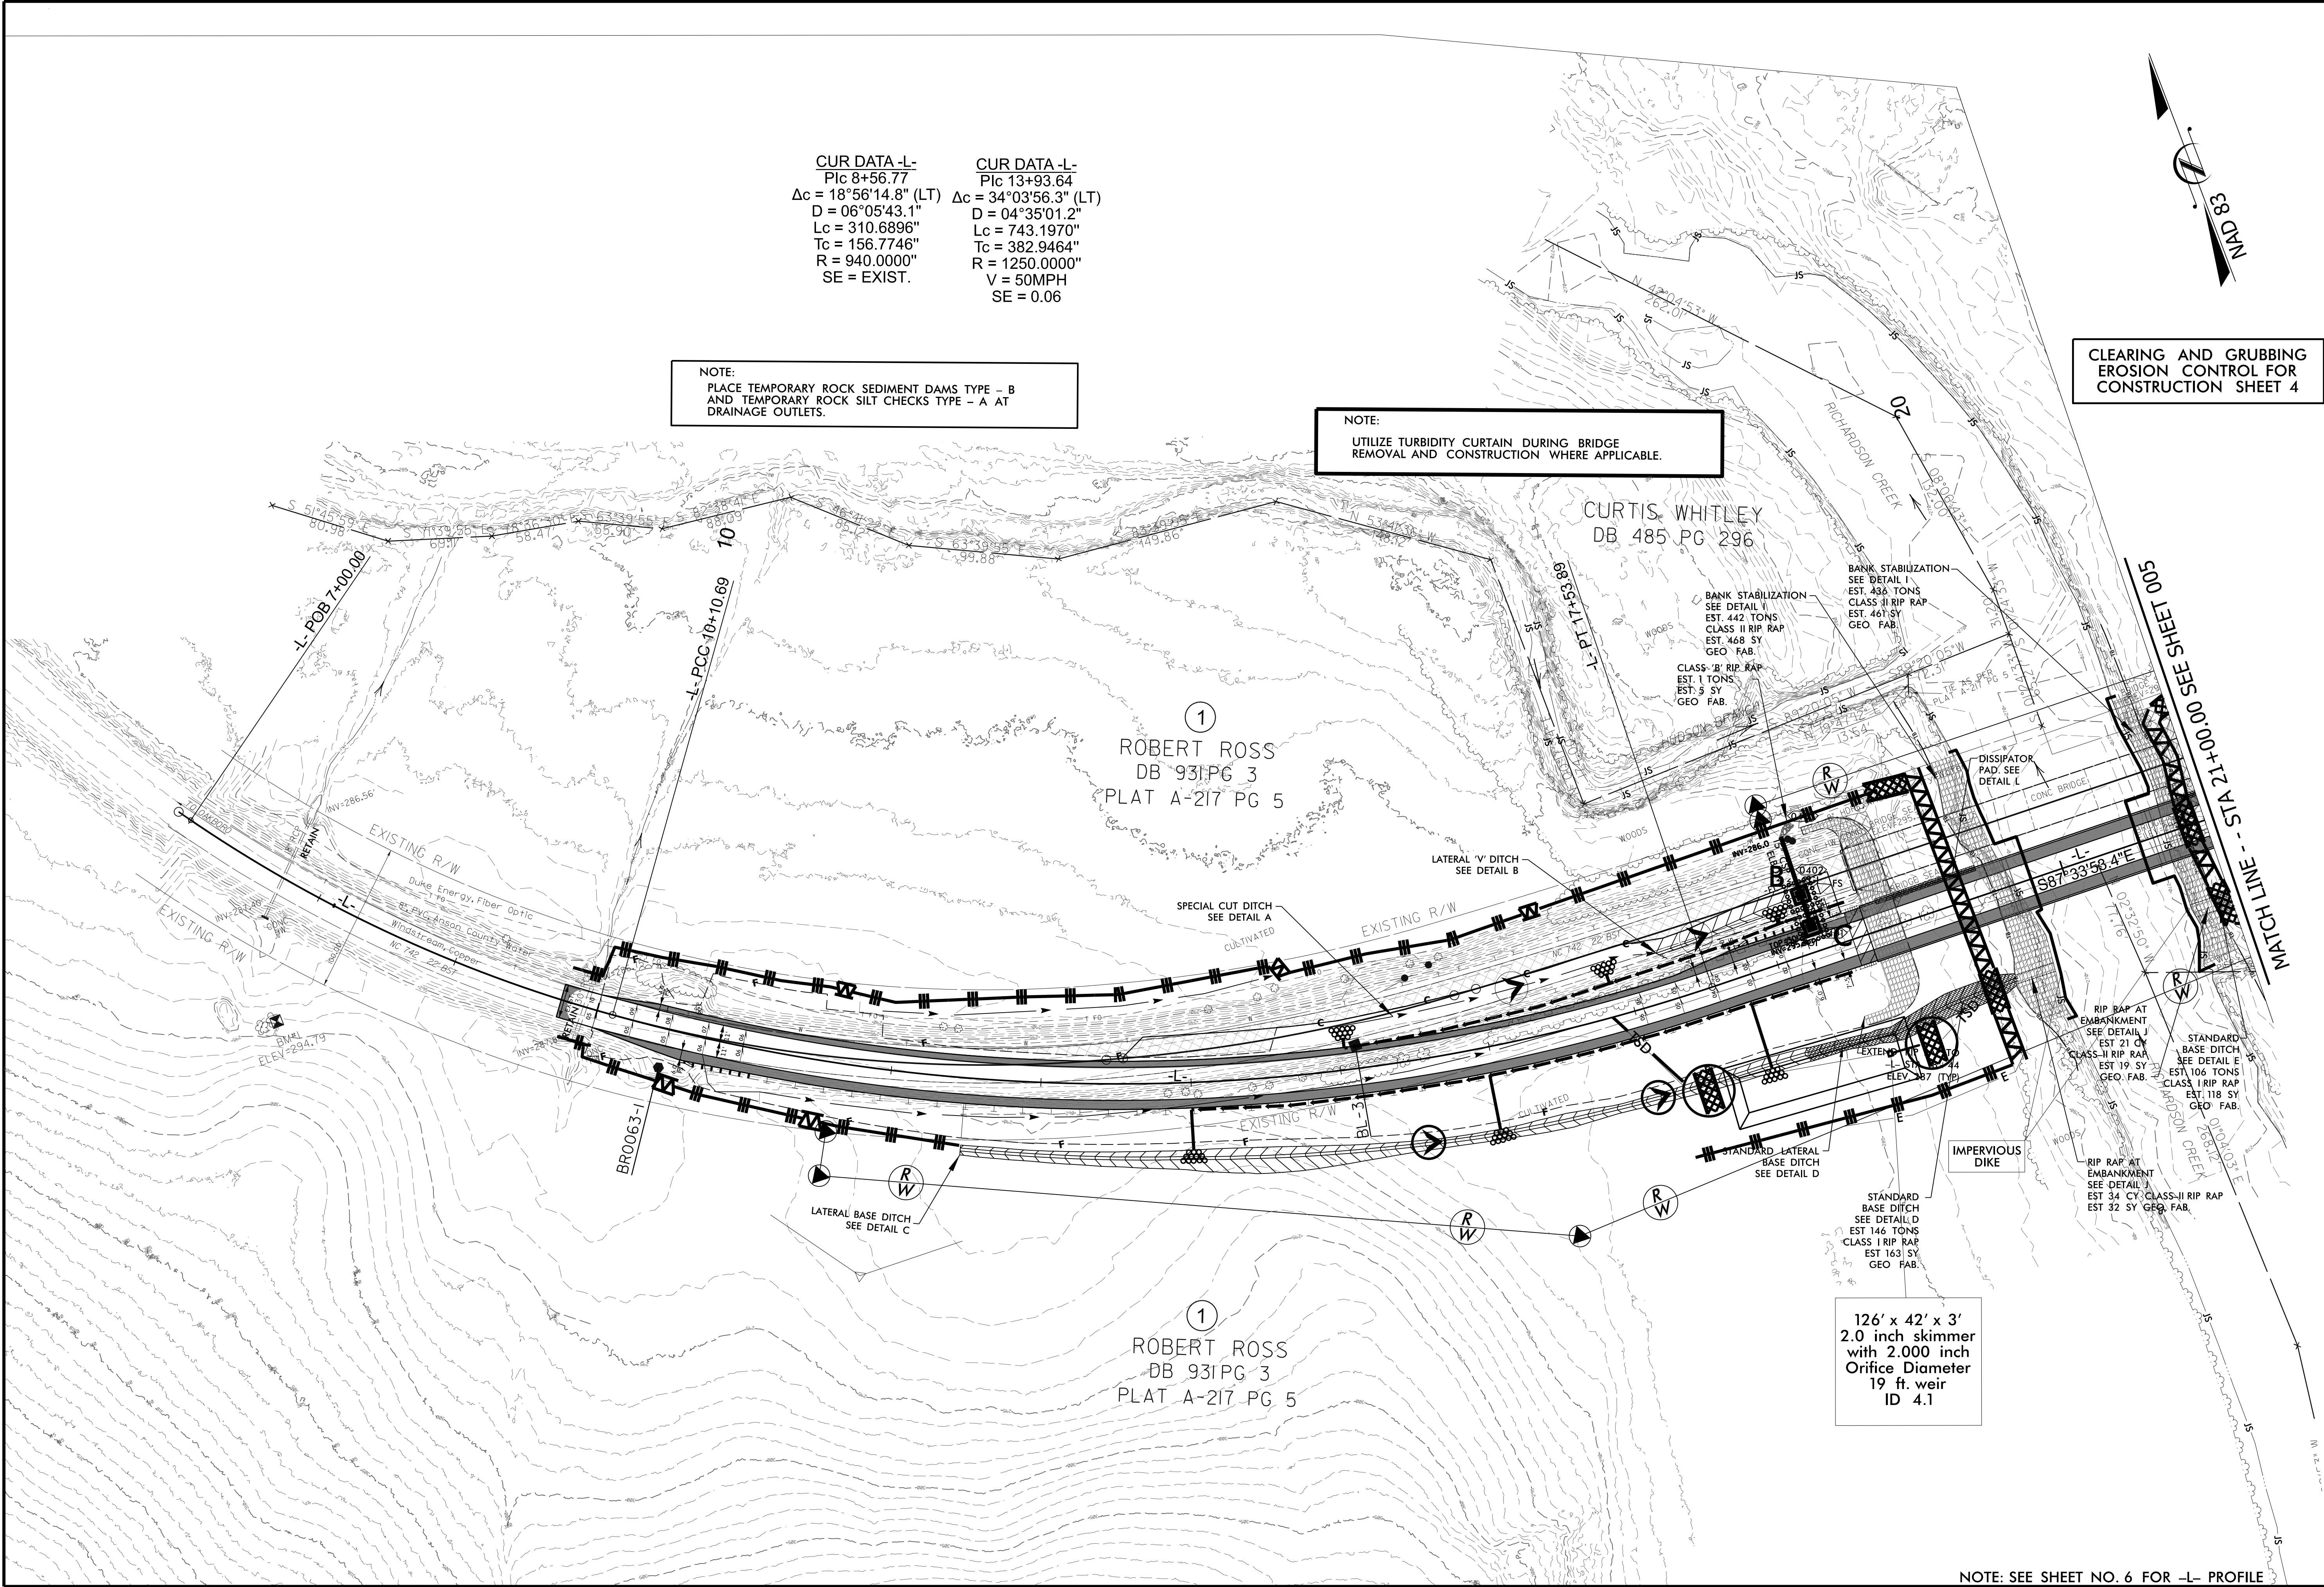

126' x 42' x 3'  
 2.0 inch skimmer  
 with 2,000 inch  
 Orifice Diameter  
 19 ft. weir  
 ID 4.1

NOTE: SEE SHEET NO. 6 FOR -L- PROFILE

REVISIONS