


FINAL PAVEMENT SCHEDULE	
C1	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.
C2	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT TO EXCEED 2" IN DEPTH.
D1	PROP. APPROX. 4" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
D2	PROP. VAR. DEPTH ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH TO BE PLACED IN LAYERS NOT LESS THAN $2\frac{1}{2}$ " OR GREATER THAN 4" IN DEPTH.
E1	PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
E2	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 5½" IN DEPTH.
R1	2' - 6" CONCRETE CURB AND GUTTER
S	4" CONCRETE SIDEWALK
Т	EARTH MATERIAL
U	EXISTING PAVEMENT
V1	MILLING ASPHALT PAVEMENT. 1½" DEPTH
V2	INCIDENTAL MILLING
W	WEDGING


NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE

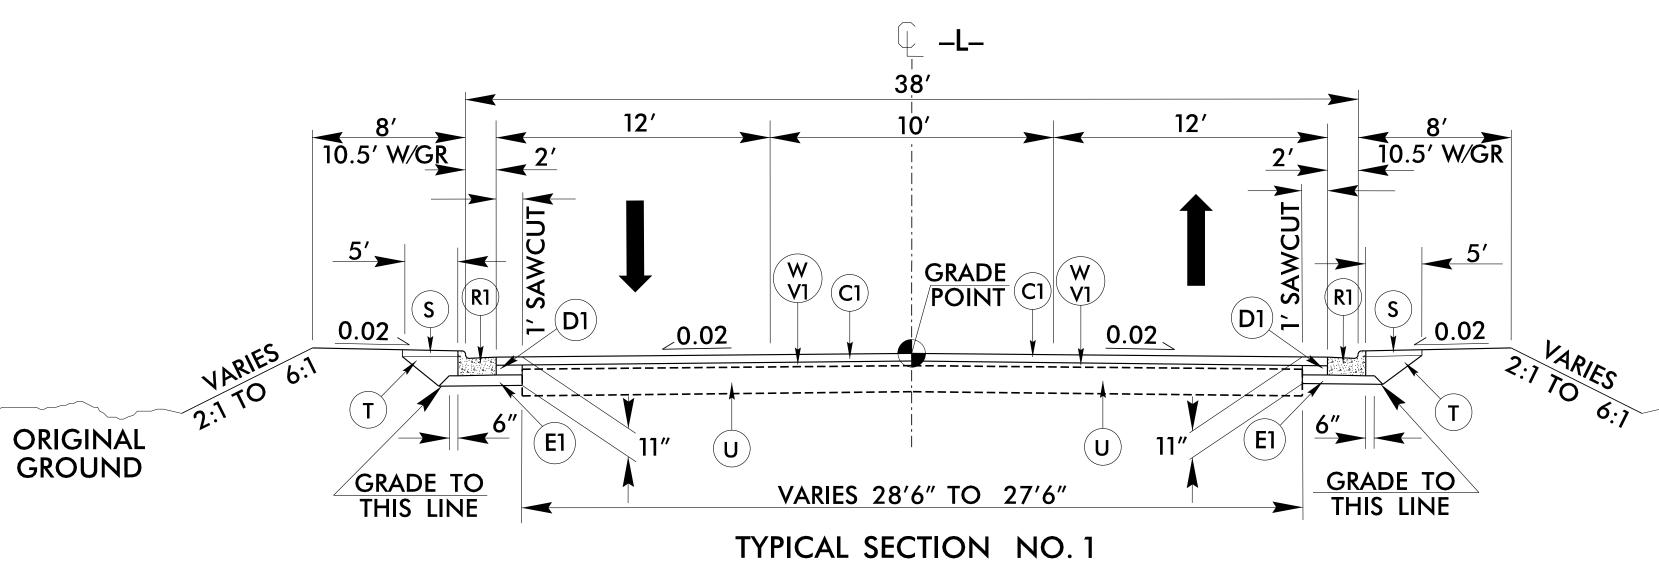

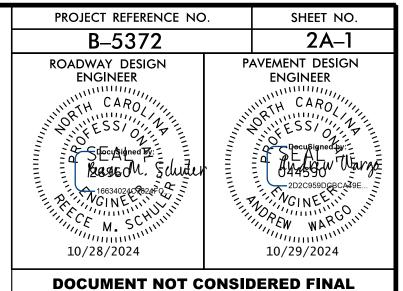

Johnson, Mirmiran, & Thompson Inc. 2550 West Tyvola Road, Suite 120, Charlotte, NC, 28217 License No: C-3097

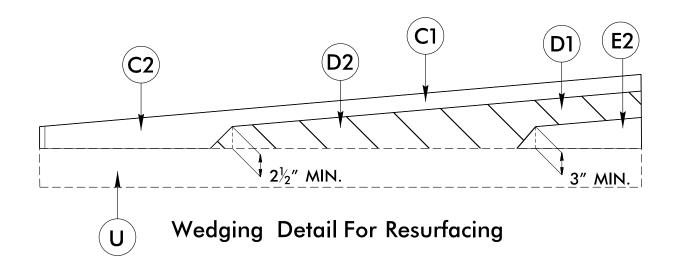

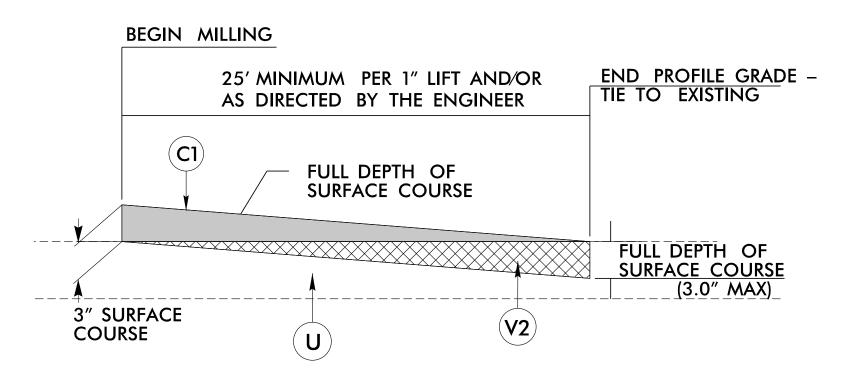

Incidental Milling

-L- STA. 17+00.00 to -L- STA. 17+50.00 -L- STA. 25+35.00 to -L- STA. 25+85.00 -Y- STA. 16+71.30 to -Y- STA. 17+21.30 -Y- STA. 21+09.64 to -Y- STA. 21+59.64 -Y2- STA. 10+69.76 to -Y2- STA. 11+19.76 -LPC- STA. 13+50.00 to -LPC- STA. 14+00.00

USE TYPICAL SECTION NO. 1

ORIGINAL GROUND

-L- STA. 17 + 00.00 to -L- STA. 18 + 00.00

Ji4jiju FM -5372_rdy_typ.dgn zpatrick