


DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

-L- SR 1114 BIG PLUMTREE CREEK RD.

BEGIN GRADE
-L- STA 11+00.00
ELEV. 3,066.35'

END GRADE
-L- STA 13+50.00
ELEV. 3,068.66'

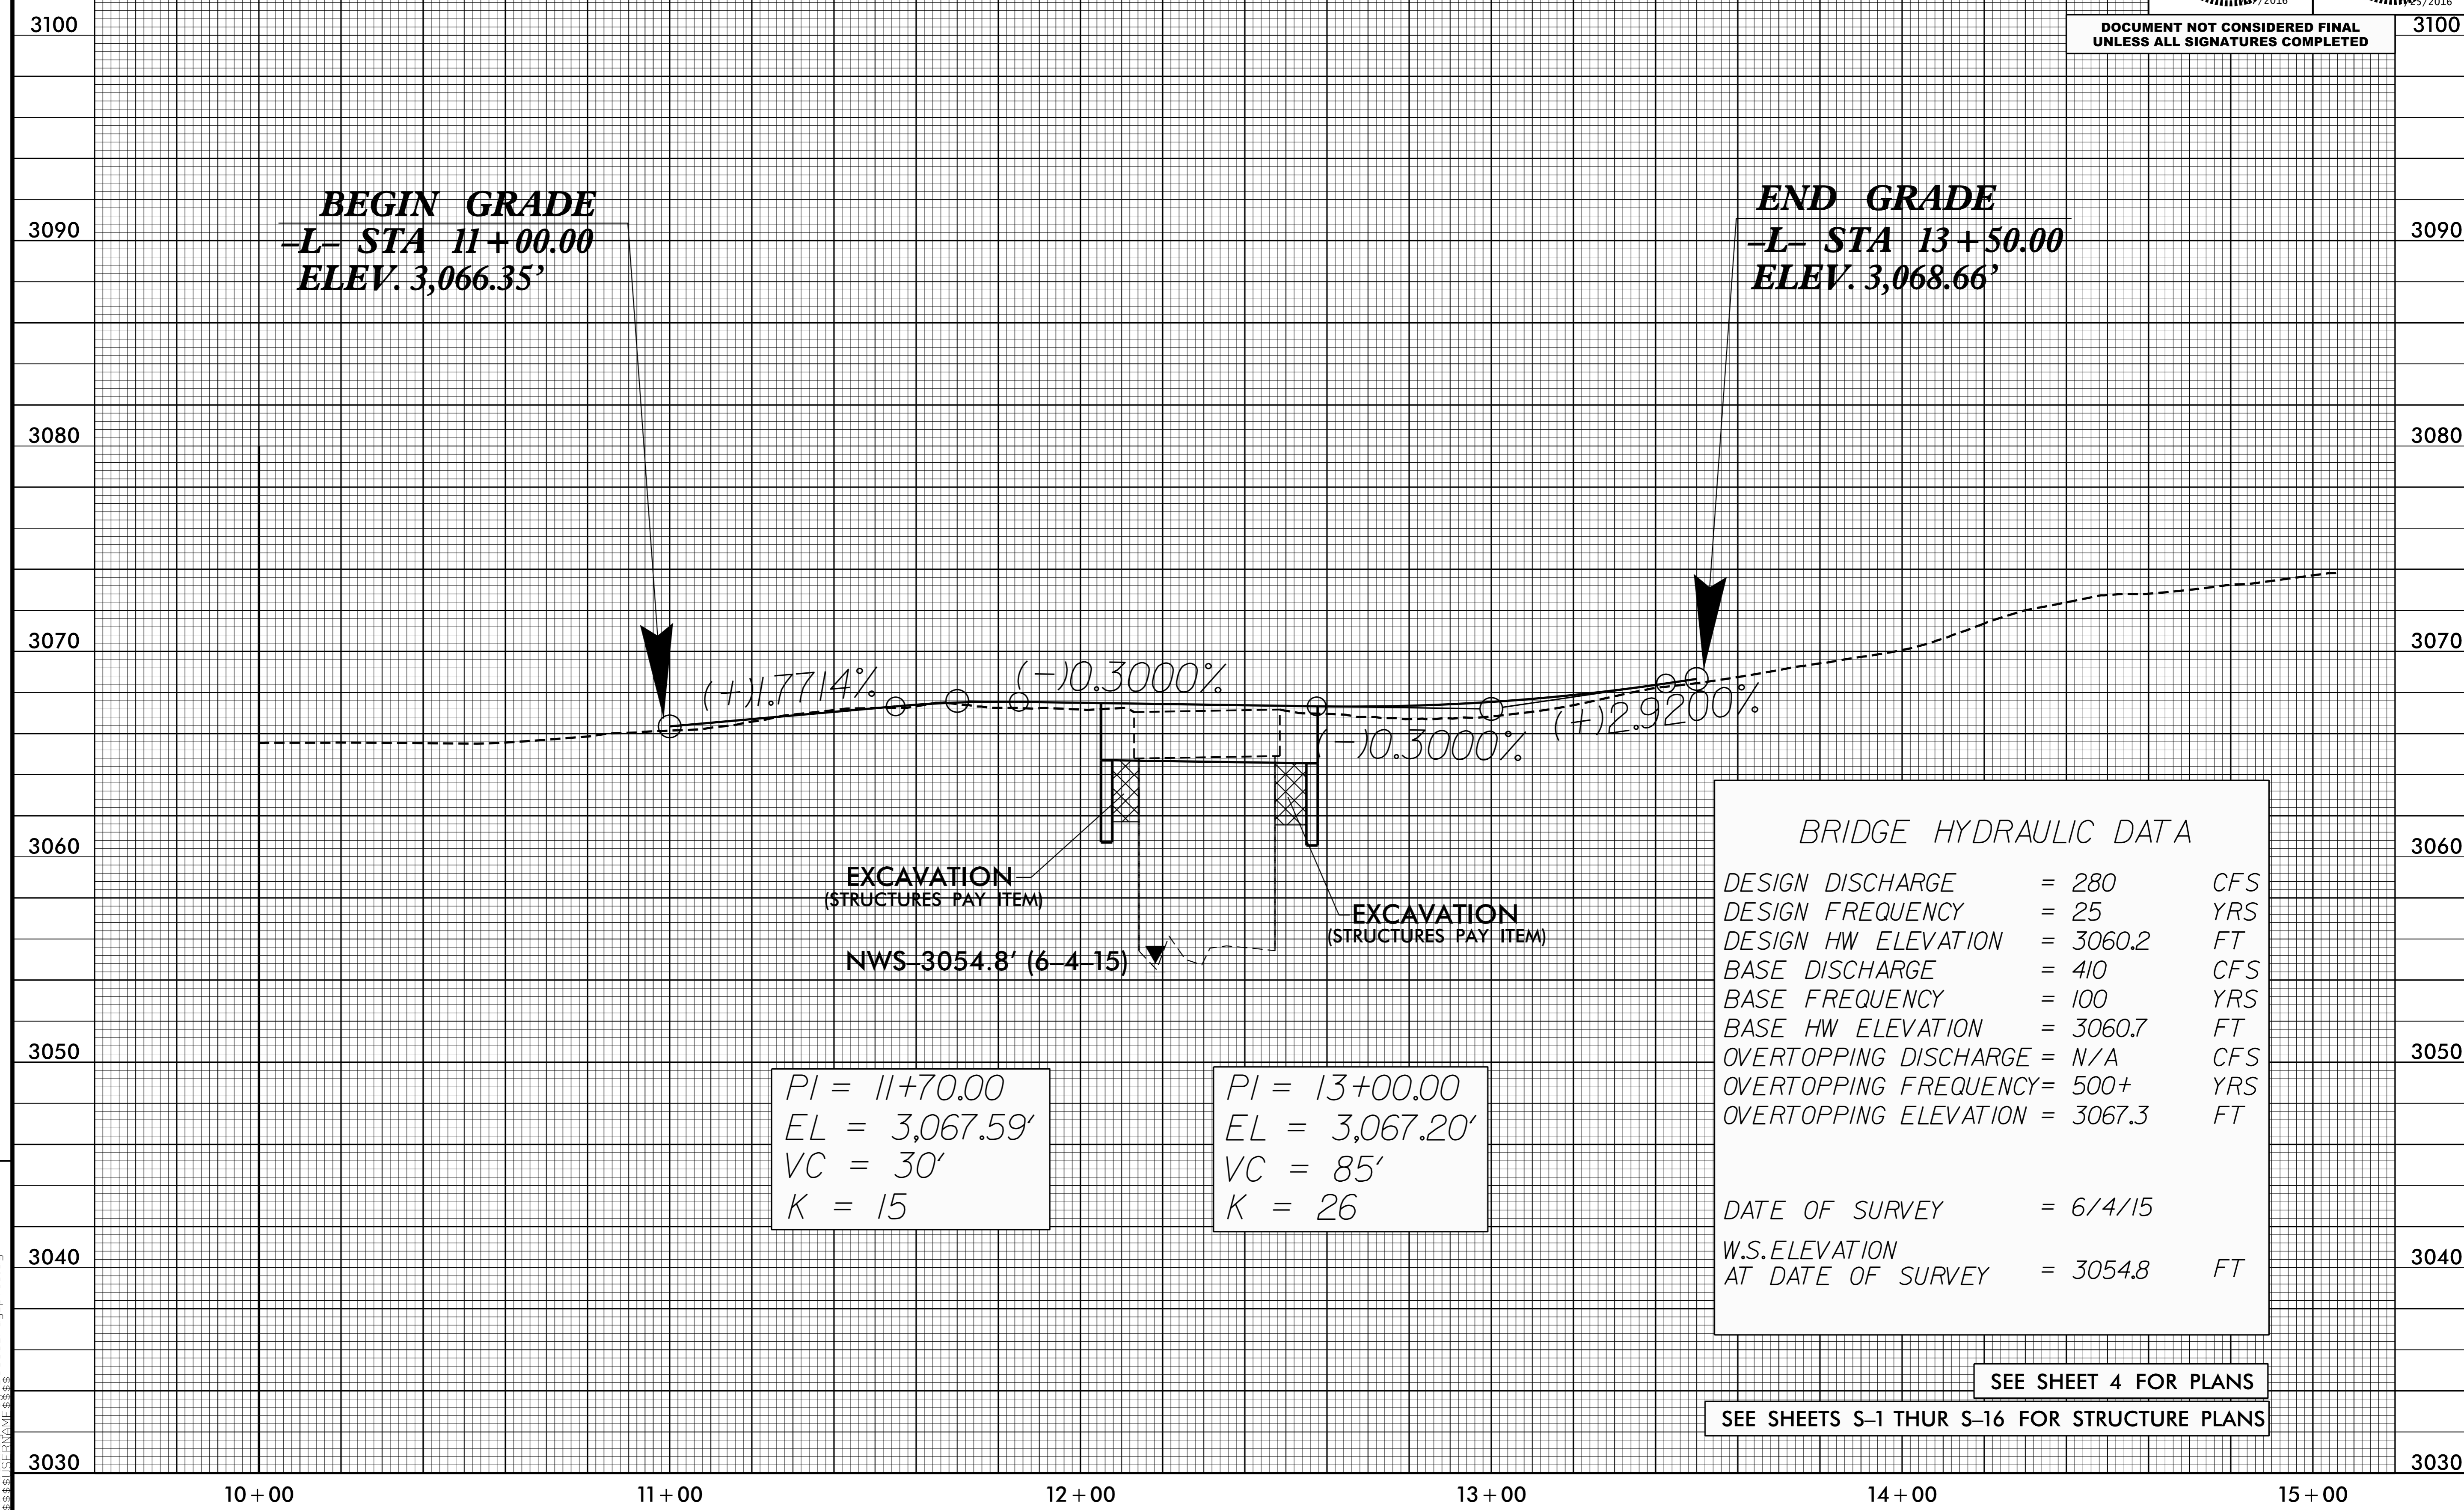

EXCAVATION
(STRUCTURES PAY ITEM)

EXCAVATION
(STRUCTURES PAY ITEM)

NWS-3054.8' (6-4-15)

PI = 11+70.00
EL = 3,067.59'
VC = 30'
K = 15

PI = 13+00.00
EL = 3,067.20'
VC = 85'
K = 26

BRIDGE HYDRAULIC DATA		
DESIGN DISCHARGE	= 280	CFS
DESIGN FREQUENCY	= 25	YRS
DESIGN HW ELEVATION	= 3060.2	FT
BASE DISCHARGE	= 410	CFS
BASE FREQUENCY	= 100	YRS
BASE HW ELEVATION	= 3060.7	FT
OVERTOPPING DISCHARGE	= N/A	CFS
OVERTOPPING FREQUENCY	= 500+	YRS
OVERTOPPING ELEVATION	= 3067.3	FT
DATE OF SURVEY	= 6/4/15	
W.S.ELEVATION AT DATE OF SURVEY	= 3054.8	FT

SEE SHEET 4 FOR PLANS

SEE SHEETS S-1 THUR S-16 FOR STRUCTURE PLANS

REVISIONS

5/14/99

19-JUL-2016 11:45 AM B5380.Rdy_pfl5.dgn