


6/10/19

PAVEMENT SCHEDULE (REVISED FINAL PAVEMENT DESIGN JUNE 24, 2024)	
C1	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.
C2	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT TO EXCEED 2" IN DEPTH.
D1	PROP. APPROX. 4" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
D2	PROP. VAR. DEPTH ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 2 1/2" IN DEPTH OR GREATER THAN 4" IN DEPTH.
E1	PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
E2	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 5 1/2" IN DEPTH.
R1	2' x 6" CONCRETE CURB AND GUTTER.
T	EARTH MATERIAL.
U	EXISTING PAVEMENT.
V1	INCIDENTAL MILLING
W	VARIABLE DEPTH ASPHALT PAVEMENT (SEE STANDARD WEDGING DETAIL SHEET No. 2A-2)

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.


PROJECT REFERENCE NO. <b>BR-0086</b>	SHEET NO. <b>2A-1</b>
RW SHEET NO.	
ROADWAY DESIGN ENGINEER 	PAVEMENT DESIGN ENGINEER 
<b>DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED</b>	

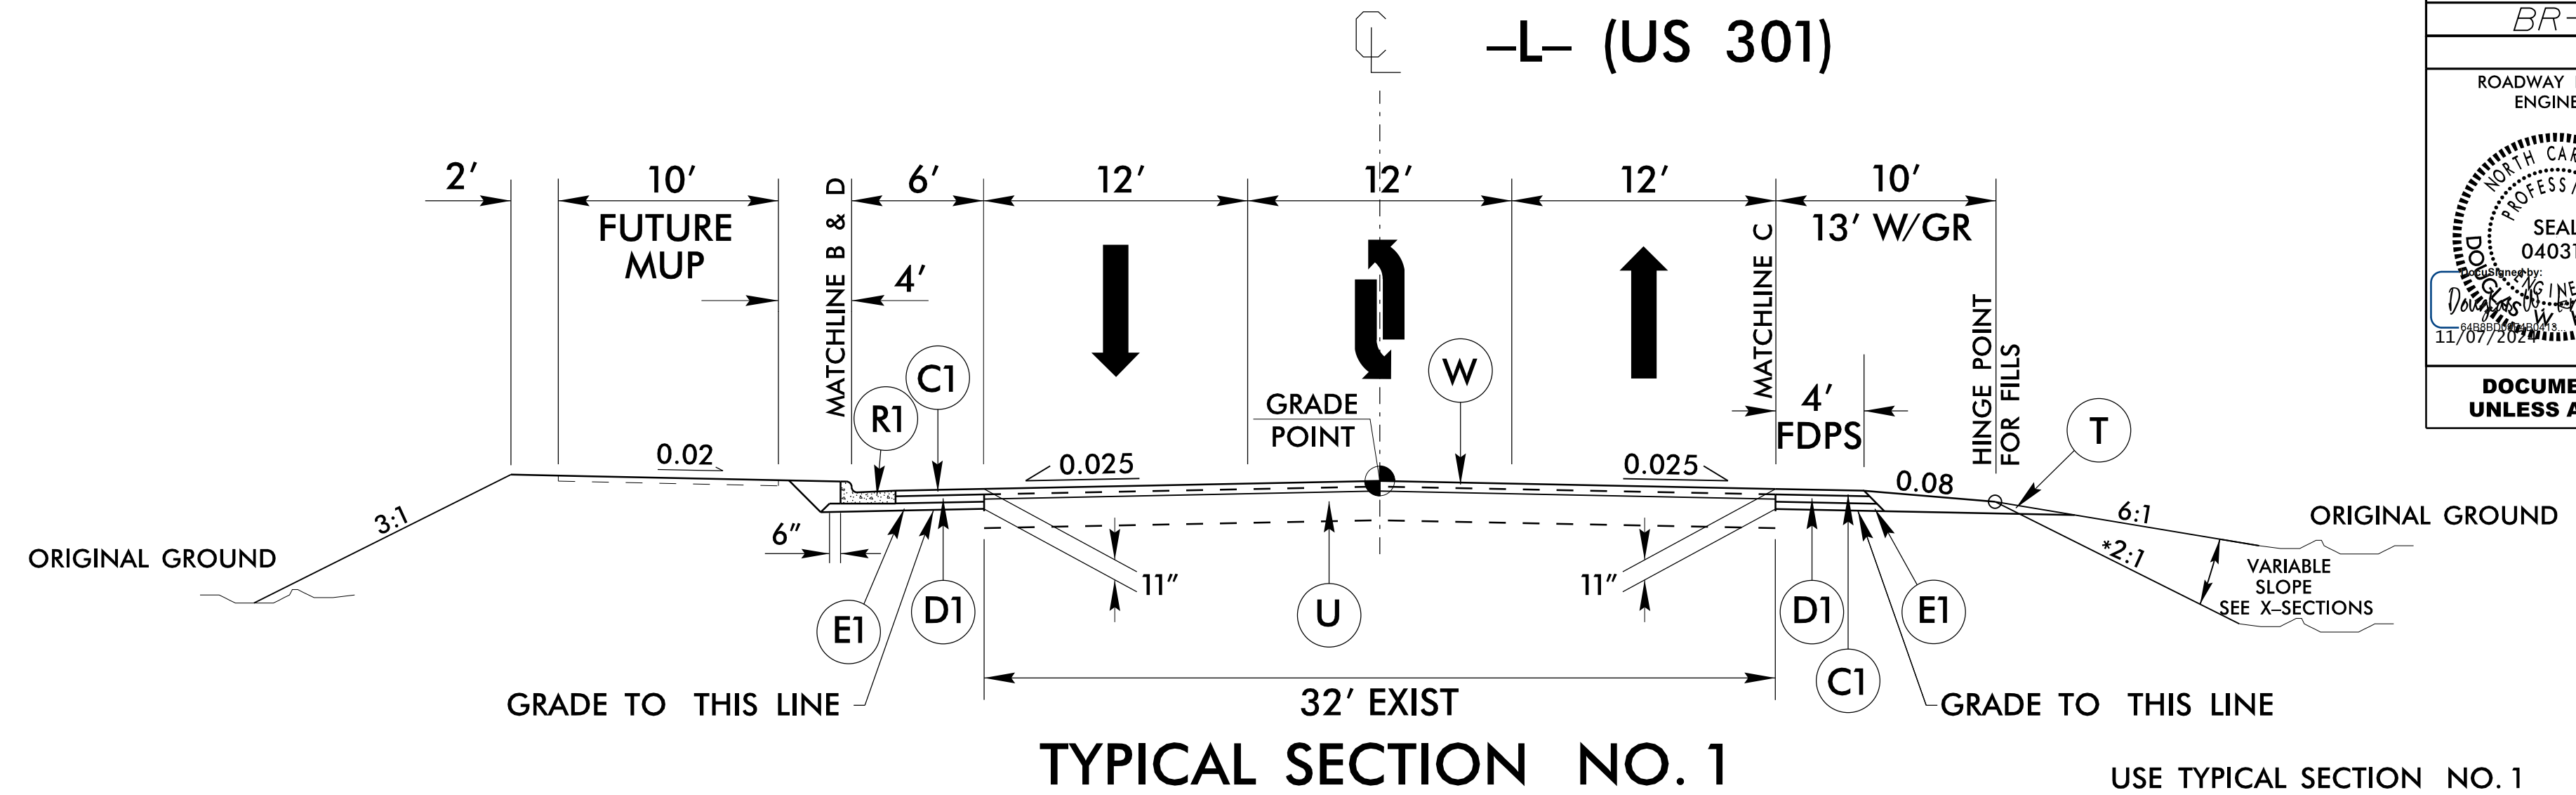

**TYPICAL SECTION NO. 1**

USE TYPICAL SECTION NO. 1


-L- STA 12+50.00 TO STA 16+50.00  
 -L- STA 22+50.00 TO STA 26+00.00  
 \*NOTE: SLOPES STEEPER THAN 3:1 MAY NEED REINFORCEMENT SEE PLANS FOR LOCATIONS

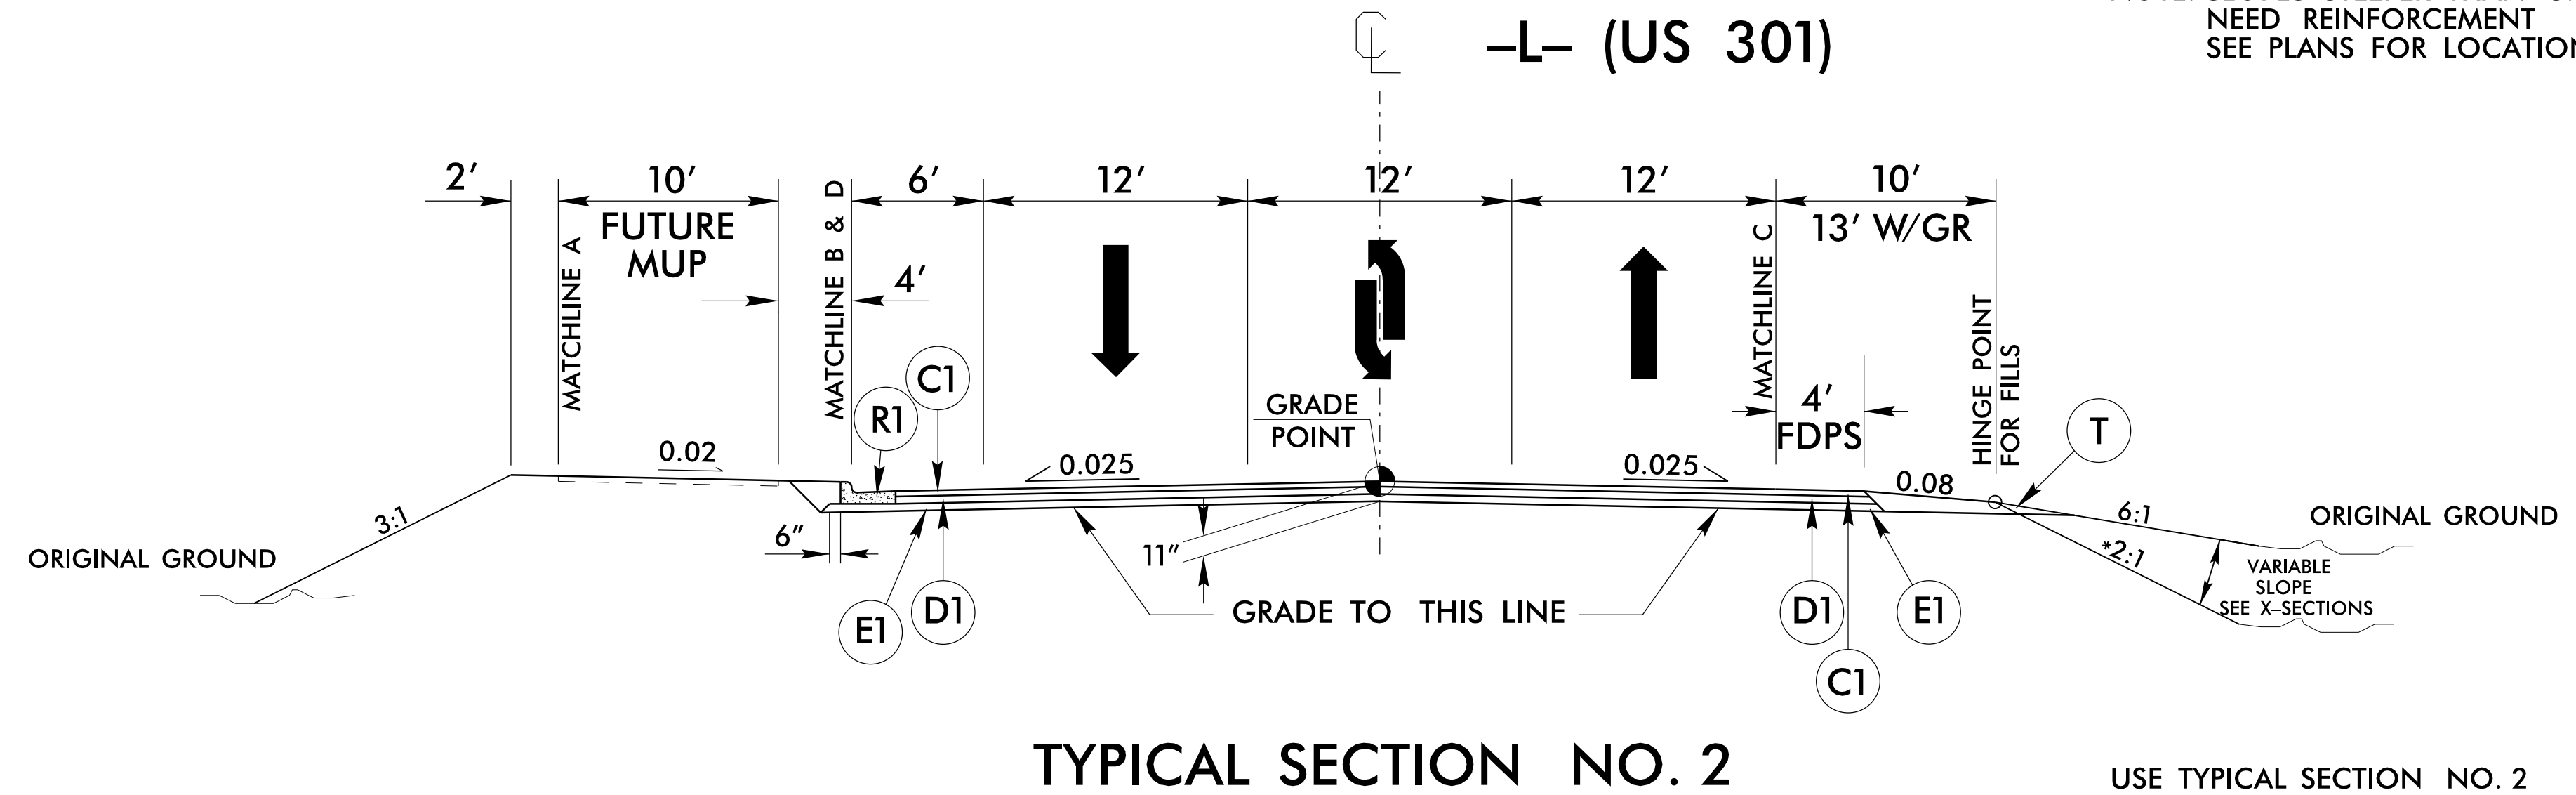

**TYPICAL SECTION NO. 2**

USE TYPICAL SECTION NO. 2


-L- STA 16+50.00 TO STA 17+56.00 BEGIN BRIDGE  
 -L- STA 20+96.00 END BRIDGE TO STA 22+50.00  
 \*NOTE: SLOPES STEEPER THAN 3:1 MAY NEED REINFORCEMENT SEE PLANS FOR LOCATIONS

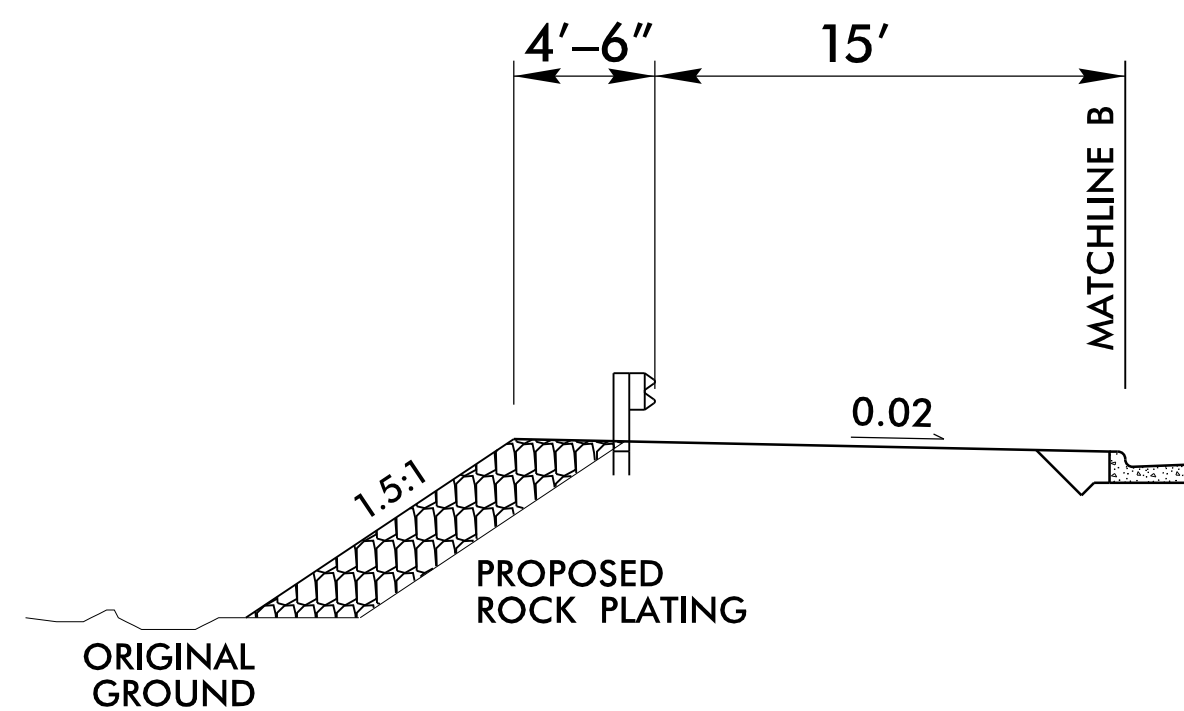

**DETAIL FOR GUARDRAIL**

DETAIL 1


USE DETAIL 1 WITH TYPICAL NO. 1  
 -L- STA 13+50.00 LT TO STA 15+65.07 LT

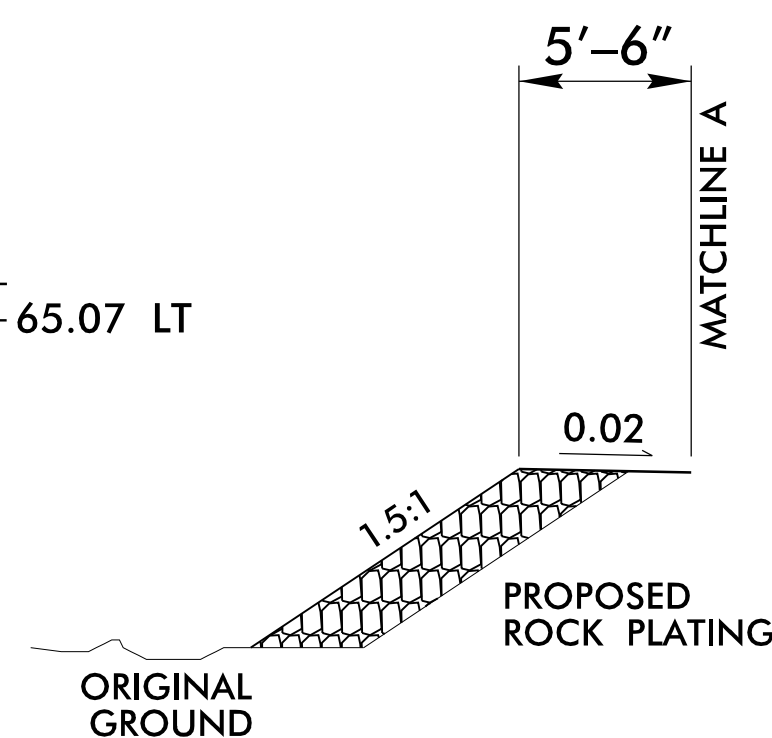

**DETAIL FOR 1.5:1 SLOPES WITH ROCK PLATING**

DETAIL 2


USE DETAIL 2 WITH TYPICAL NO. 2  
 -L- STA 16+50.00 LT TO STA 17+50.00 LT

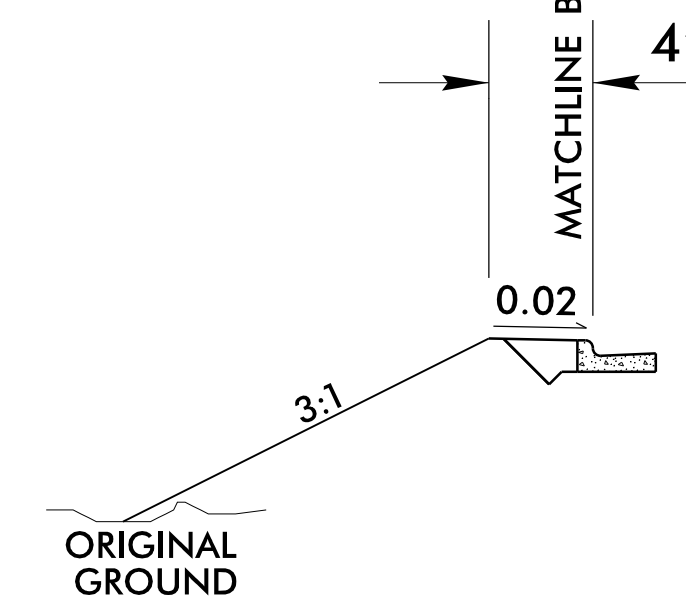

**DETAIL FOR BERM WIDTH**

DETAIL 3


USE DETAIL 3 WITH TYPICAL NOS. 1  
 -L- STA 15+90.00 LT TO STA 16+25.00 LT

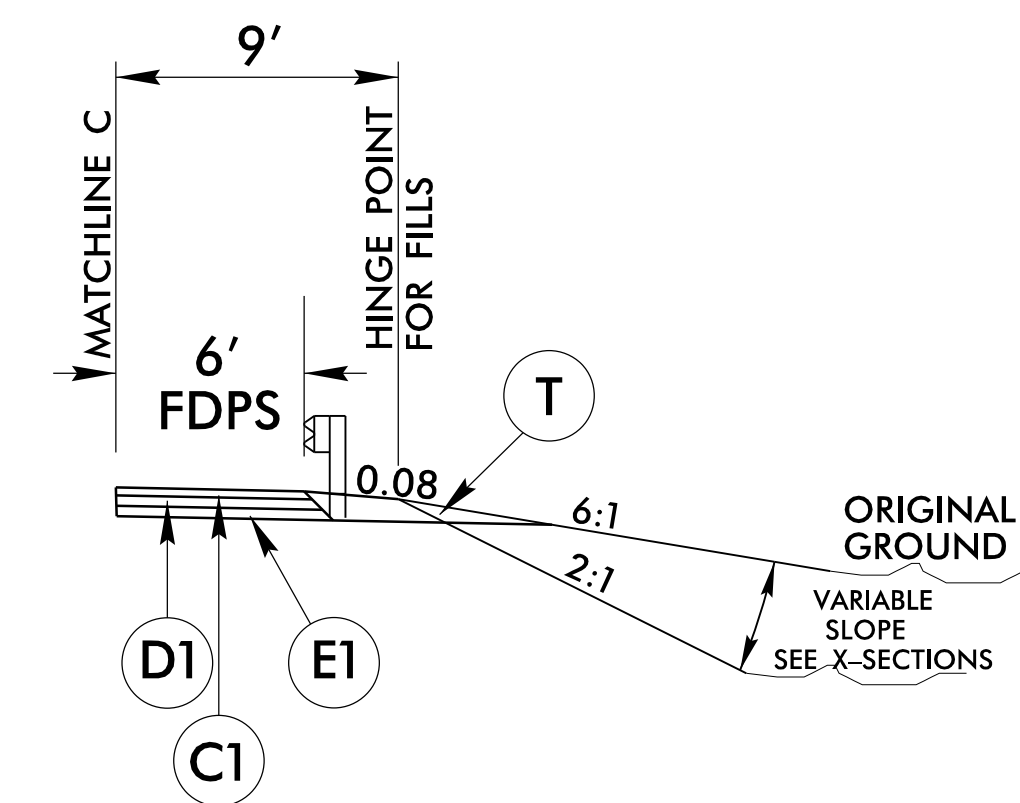

**DETAIL FOR SHOULDER WIDTH**

DETAIL 4

USE DETAIL 4 WITH TYPICAL NOS. 1 & 2  
 -L- STA 12+50.00 RT TO STA 17+24.52 RT

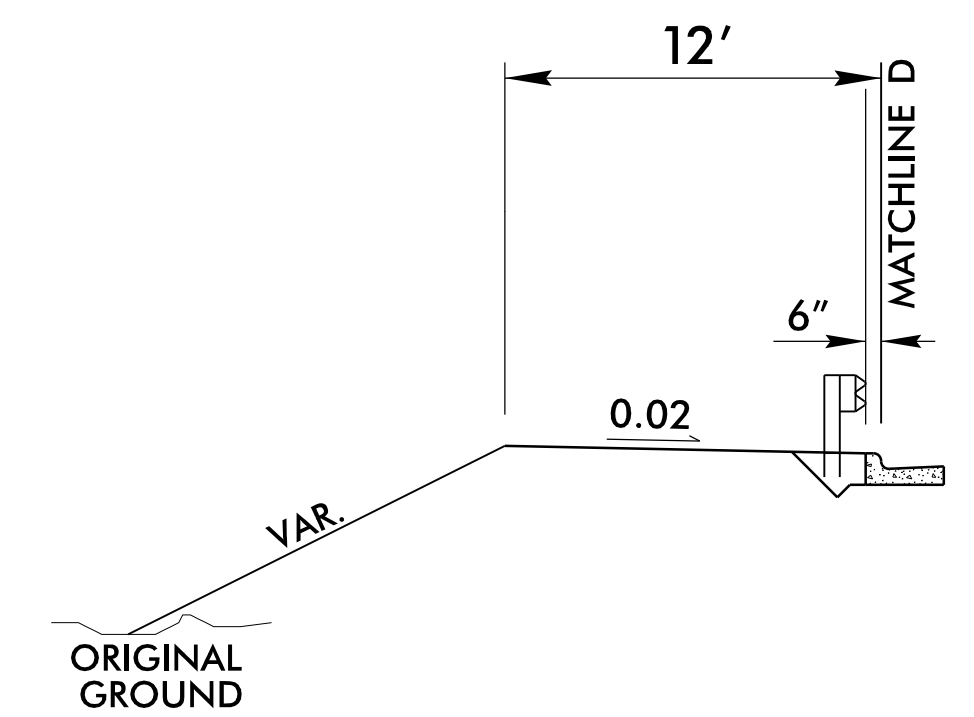

**DETAIL FOR BERM WIDTH**

DETAIL 5

USE DETAIL 5 WITH TYPICAL NOS. 1 & 2  
 -L- STA 21+75.00 LT TO STA 24+75.00 LT

15-OCT-2024 12:37 P:R:\Roadway\Projects\BR0086-Rdy-tyr.dgn