Docusign Envelope ID: C3EFD2F2-5C76-4E60-A147-91A4A01F99B3

| TIP NO. | SHEET NO. |
|---|---|
| I-5979 | SGN-3A |

APPROVED:

DATE:

SEAL

NORTH CAROLINA PROFESSIONAL SEAL 031533 ENGINEER JOHN G. TOWNSEND

Docusigned by: John Townsend 2F2101E41D8C4D0...

10/28/2024

**DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED**

vhb

940 Main Campus Drive, Suite 500 Raleigh, NC 27606
NC License No. C-3705

---

SIGN NUMBER: 305
TYPE: D
QUANTITY: 2
SIGN WIDTH: 3′-6″
HEIGHT: 1′-6″
TOTAL AREA: 10.5 Sq.Ft.
BORDER TYPE: FLUSH
RECESS: 0″
WIDTH: 0.75″
RADII: 1.5″
NO. Z BARS:
LENGTH:

BACKG COLOR: Green
COPY COLOR: White

| SYMBOL | X | Y | WID | HT |
|---|---|---|---|---|
| | | | | |

MAT'L: 0.125″ (3.2 mm) ALUMINUM

DESIGN BY: VHB
PROJECT ID: I-5979
CHECKED BY:
LOCATION:
Jan 04, 2023
DIV: 08

USE NOTES:

1. Legend and border(except those that are colored black) shall be direct applied Grade C sheeting.
2. Background shall be Grade C reflective sheeting.
3. Shields; A, B, and C type arrows shall be on 0.032″ (0.8mm) aluminum with Grade C reflective sheeting and demountable.




Spacing Factor is 1 unless specified otherwise

LETTER POSITIONS

Letter spacings are to start of next letter

| | C | h | e | r | a | w | | Series/Size Text Length |
|---|---|---|---|---|---|---|---|---|
| | | | | | | | | D 2000 |
| 7.2 | 5.3 | 4.4 | 4.4 | 2.7 | 4.1 | 6.8 | 7.2 | 27.7 |

FILENAME: 15979_sgn_305

NORTH CAROLINA D.O.T. SIGN DETAIL

---

SIGN NUMBER: 306
TYPE: D
QUANTITY: 2
SIGN WIDTH: 6′-0″
HEIGHT: 1′-6″
TOTAL AREA: 18.0 Sq.Ft.
BORDER TYPE: FLUSH
RECESS: 0″
WIDTH: 0.75″
RADII: 1.5″
NO. Z BARS:
LENGTH:

BACKG COLOR: Green
COPY COLOR: White

| SYMBOL | X | Y | WID | HT |
|---|---|---|---|---|
| | | | | |

MAT'L: 0.125″ (3.2 mm) ALUMINUM

DESIGN BY: VHB
PROJECT ID: I-5979
CHECKED BY:
LOCATION:
Jan 04, 2023
DIV: 08

USE NOTES:

1. Legend and border(except those that are colored black) shall be direct applied Grade C sheeting.
2. Background shall be Grade C reflective sheeting.
3. Shields; A, B, and C type arrows shall be on 0.032″ (0.8mm) aluminum with Grade C reflective sheeting and demountable.

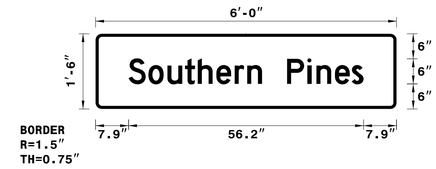


Spacing Factor is 1 unless specified otherwise

LETTER POSITIONS

Letter spacings are to start of next letter

| | S | o | u | t | h | e | r | n | | P | i | n | e | s | Series/Size Text Length |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | | | | | | | D 2000 |
| 7.9 | 4.7 | 4.6 | 4.2 | 3.1 | 4.4 | 4.4 | 3 | 3.5 | 6 | 4.9 | 2.2 | 4.4 | 4 | 2.8 | 7.9 | 56.2 |

FILENAME: 15979_sgn_306

NORTH CAROLINA D.O.T. SIGN DETAIL

---

SIGN NUMBER: 307
TYPE: D
QUANTITY: 1
SIGN WIDTH: 5′-0″
HEIGHT: 1′-6″
TOTAL AREA: 7.5 Sq.Ft.
BORDER TYPE: FLUSH
RECESS: 0″
WIDTH: 0.75″
RADII: 1.5″
NO. Z BARS:
LENGTH:

BACKG COLOR: Green
COPY COLOR: White

| SYMBOL | X | Y | WID | HT |
|---|---|---|---|---|
| | | | | |

MAT'L: 0.125″ (3.2 mm) ALUMINUM

DESIGN BY: VHB
PROJECT ID: I-5979
CHECKED BY:
LOCATION:
Jan 04, 2023
DIV: 08

USE NOTES:

1. Legend and border(except those that are colored black) shall be direct applied Grade C sheeting.
2. Background shall be Grade C reflective sheeting.
3. Shields; A, B, and C type arrows shall be on 0.032″ (0.8mm) aluminum with Grade C reflective sheeting and demountable.

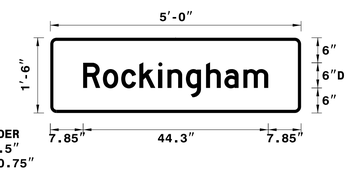


Spacing Factor is 1 unless specified otherwise

LETTER POSITIONS

Letter spacings are to start of next letter

| | R | o | c | k | i | n | g | h | a | m | Series/Size Text Length |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | | | D 2000 |
| 7.9 | 4.7 | 4.4 | 4.3 | 4.6 | 2.2 | 4.4 | 4.8 | 4.4 | 4.6 | 5.9 | 7.9 | 44.3 |

FILENAME: 15979_sgn_307

NORTH CAROLINA D.O.T. SIGN DETAIL

---

SIGN NUMBER: 308
TYPE: D
QUANTITY: 1
SIGN WIDTH: 5′-6″
HEIGHT: 2′-6″
TOTAL AREA: 13.8 Sq.Ft.
BORDER TYPE: FLUSH
RECESS: 0″
WIDTH: 0.75″
RADII: 3″
NO. Z BARS:
LENGTH:

BACKG COLOR: Green
COPY COLOR: White

| SYMBOL | X | Y | WID | HT |
|---|---|---|---|---|
| AR_Type D | 7.6 | 18.3 | 6 | 9 |
| AR_FISHHOOK | 5.5 | 2.7 | 10.1 | 10.8 |

MAT'L: 0.125″ (3.2 mm) ALUMINUM

DESIGN BY: VHB
PROJECT ID: I-5979
CHECKED BY:
LOCATION:
Mar 01, 2024
DIV: 08

USE NOTES:

1. Legend and border(except those that are colored black) shall be direct applied Grade C sheeting.
2. Background shall be Grade C reflective sheeting.
3. Shields; A, B, and C type arrows shall be on 0.032″ (0.8mm) aluminum with Grade C reflective sheeting and demountable.

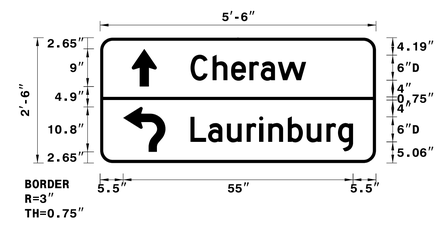


Spacing Factor is 1 unless specified otherwise

LETTER POSITIONS

Letter spacings are to start of next letter

| | C | h | e | r | a | w | | Series/Size Text Length |
|---|---|---|---|---|---|---|---|---|
| | | | | | | | | D 2000 |
| 21.6 | 5.3 | 4.4 | 4.4 | 2.7 | 4.1 | 6.8 | 16.7 | 27.7 |

| | L | a | u | r | i | n | b | u | r | g | Series/Size Text Length |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | | | D 2000 |
| 21.6 | 4.2 | 4.5 | 4.7 | 3 | 2.2 | 4.7 | 4.5 | 4.7 | 2.8 | 3.6 | 5.5 | 38.9 |

FILENAME: 15979_sgn_308

NORTH CAROLINA D.O.T. SIGN DETAIL

# SIGN DESIGNS

10/28/2024
R:\Traffic\Signing\CADD\Signing Layout Plans\15979_sgn_psh03A.dgn
User:jtownsend