


CLEARING AND GRUBBING  
EROSION CONTROL FOR  
CONSTRUCTION SHEET 5

NOTE:  
PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B  
AND TEMPORARY ROCK SILT CHECKS TYPE - A AT  
DRAINAGE OUTLETS.


**ENVIRONMENTALLY  
SENSITIVE AREA  
SEE PROJECT  
SPECIAL PROVISIONS**

PI Sta 19+40.77  
Δ = 20° 52' 35.1" (LT)  
D = 4' 18" 28.6"  
L = 484.60'  
T = 245.02'  
R = 1,330.00'  
DS = 40 MPH  
e = 0.06

PI Sta 23+64.02  
Δ = 30° 52' 45.3" (LT)  
D = 8' 36" 57.3"  
L = 358.40'  
T = 183.67'  
R = 665.00'  
DS = 40 MPH  
e = 0.06

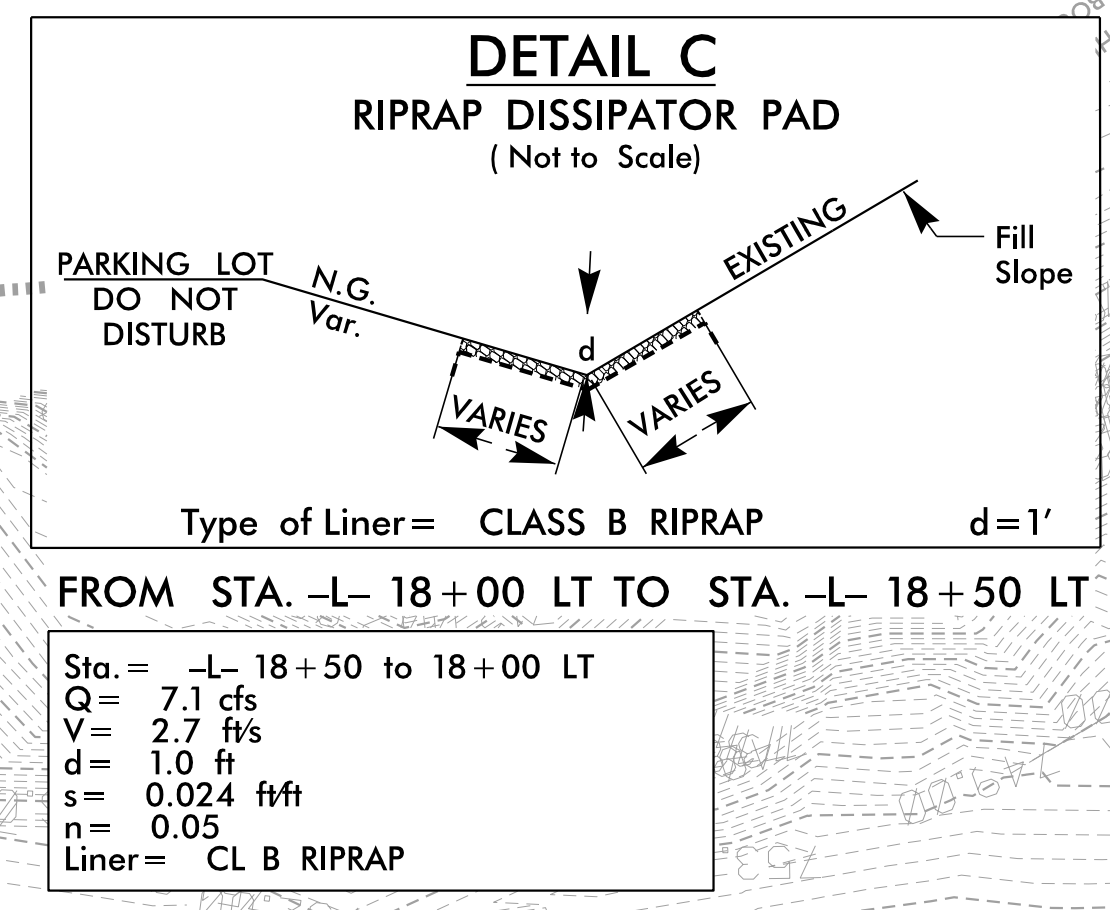

8/17/2024 11:15:56 AM EC-psah05-CG.dgn User: kforbes

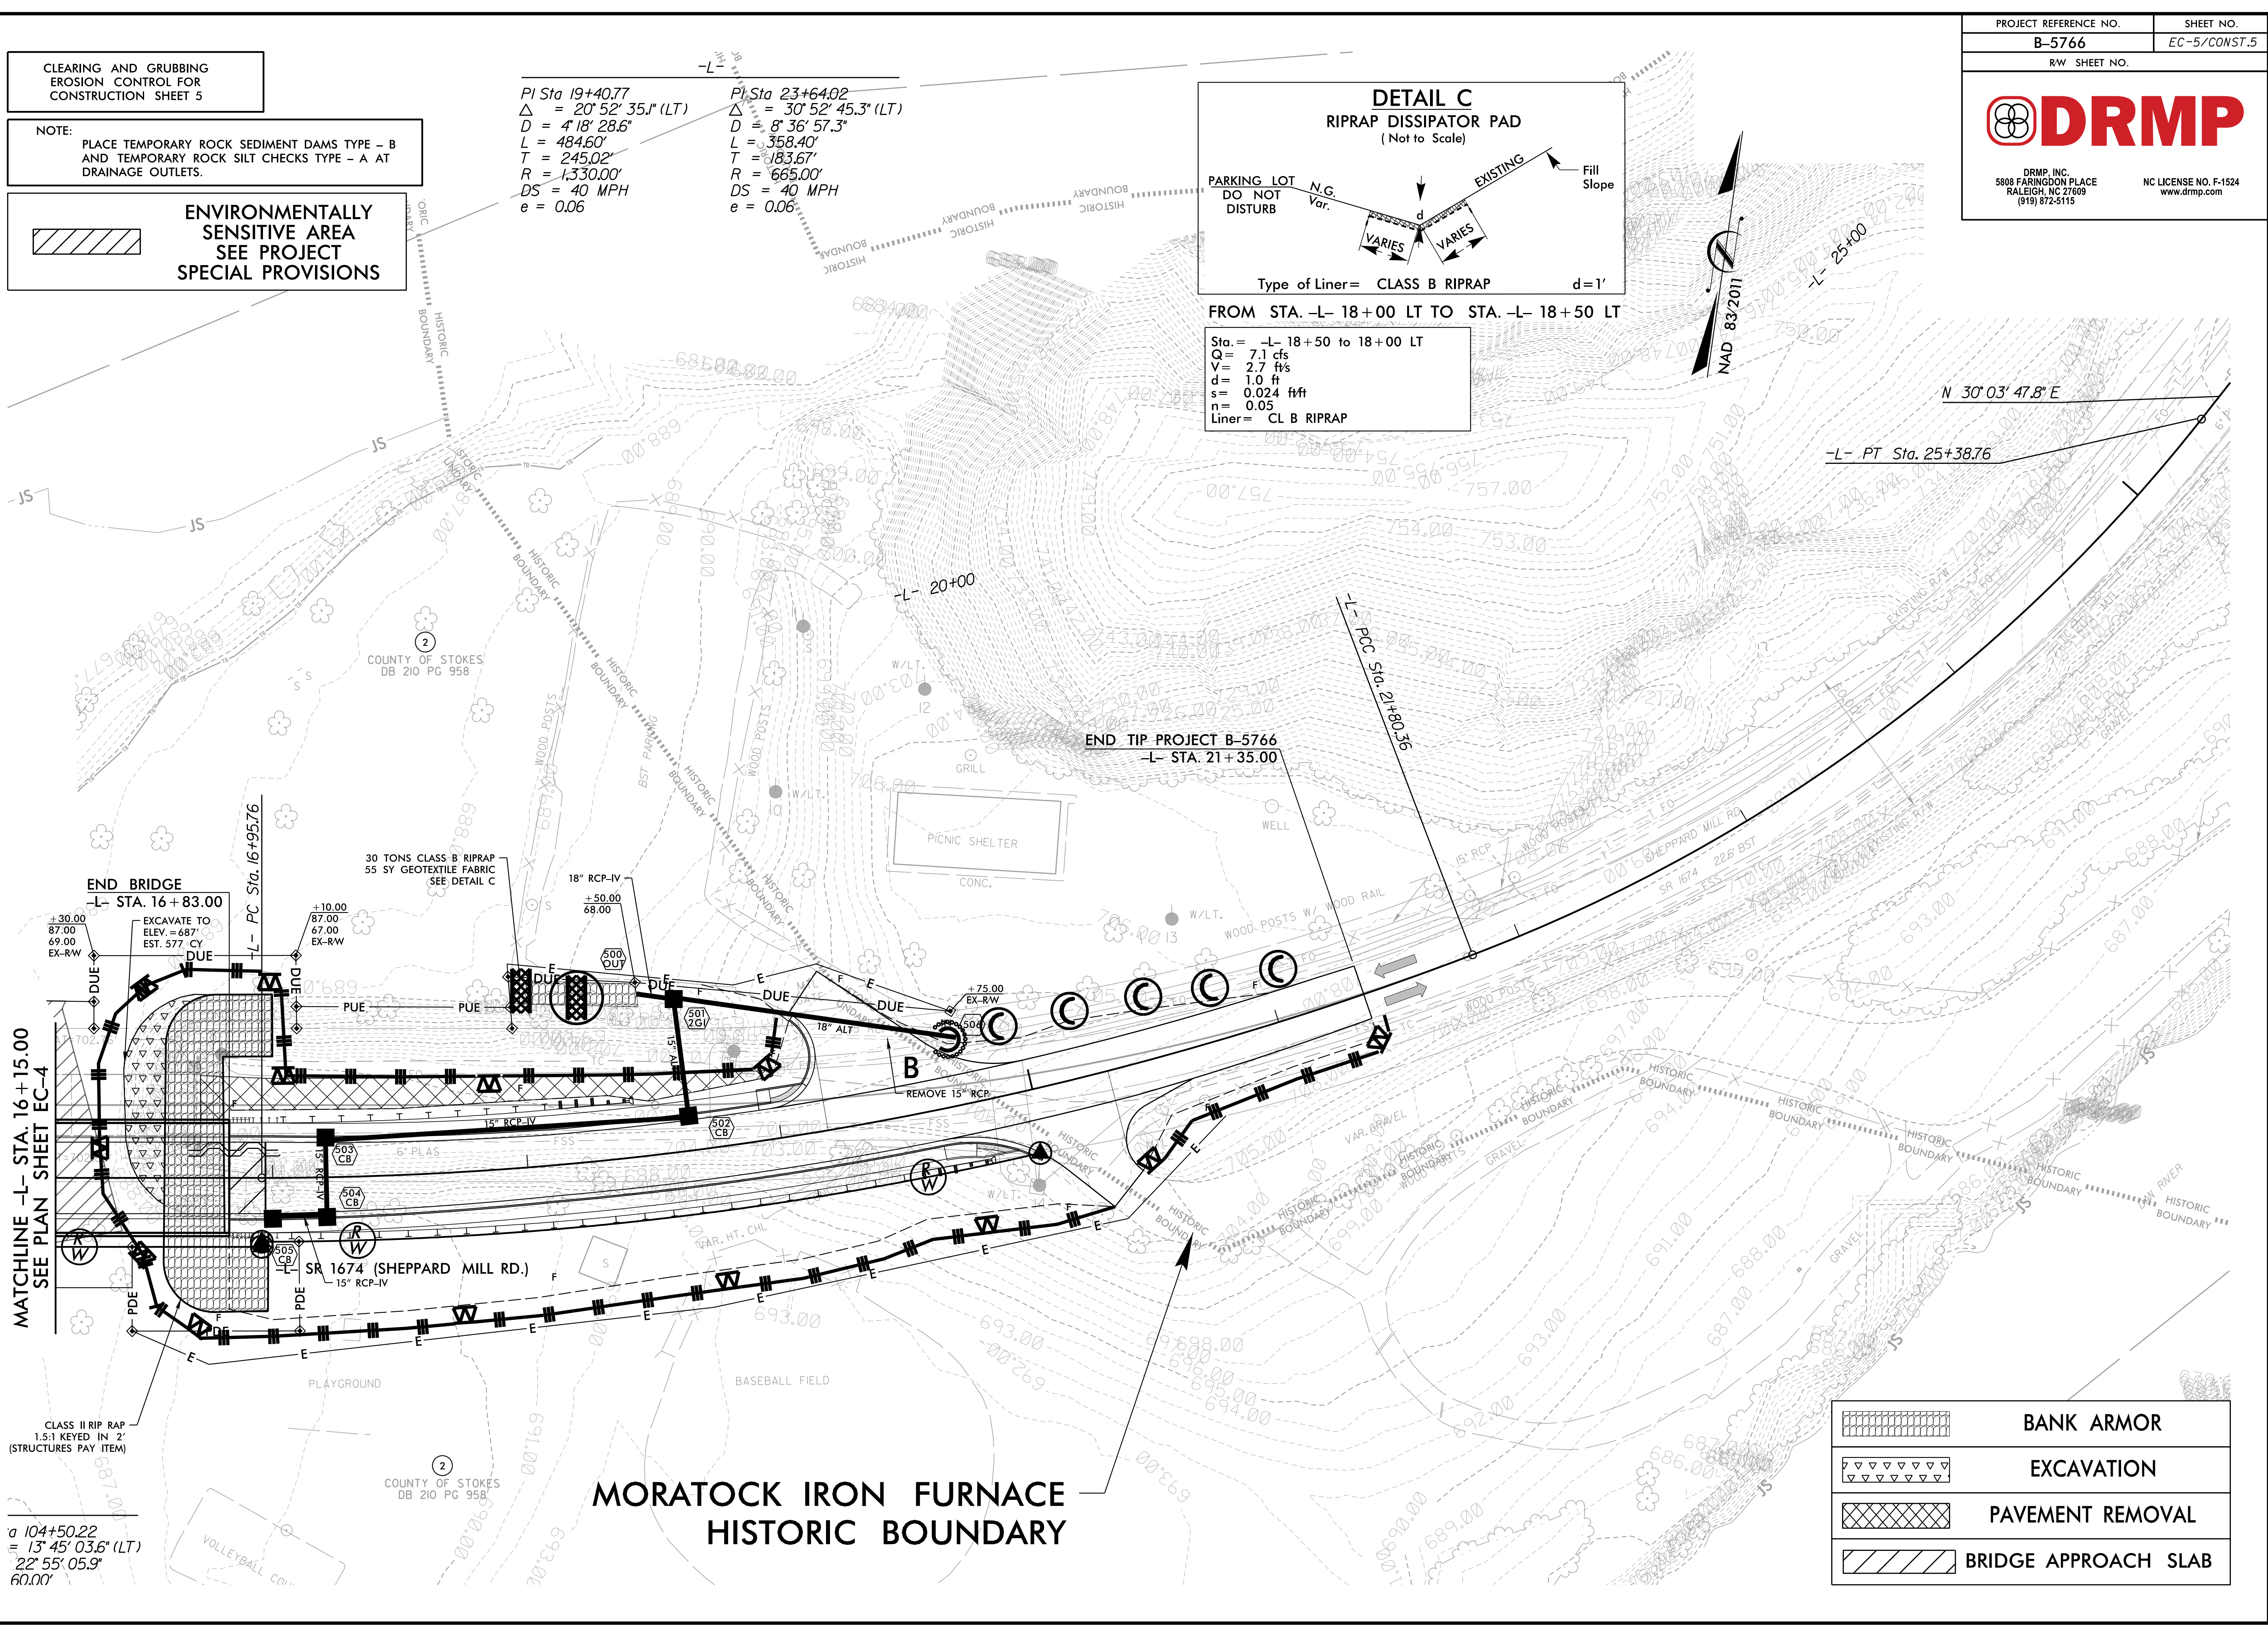

MATCHLINE -L- STA. 16+15.00  
SEE PLAN SHEET EC-4

CLASS II RIP RAP  
1.5:1 KEYED IN 2"  
(STRUCTURES PAY ITEM)

104+50.22  
= 13° 45' 03.6" (LT)  
22° 55' 05.9"  
60.00'

**MORATOCK IRON FURNACE  
HISTORIC BOUNDARY**

	BANK ARMOR
	EXCAVATION
	PAVEMENT REMOVAL
	BRIDGE APPROACH SLAB