

NOTES

DESIGN FILL ----- 20'-9" (MAX.)

FOR OTHER DESIGN DATA AND GENERAL NOTES, SEE SHEET SN.

3"Ø WEEP HOLES INDICATED TO BE IN ACCORDANCE WITH NCDOT STANDARD SPECIFICATIONS.

THE RESIDENT ENGINEER SHALL CHECK THE LENGTH OF CULVERT BEFORE STAKING IT OUT TO MAKE CERTAIN THAT IT WILL PROPERLY TAKE CARE OF THE FILL.

CONCRETE IN THE CULVERT TO BE POURED IN THE FOLLOWING ORDER:

1. WING FOOTINGS, CURTAIN WALLS AND FLOOR SLAB INCLUDING 4"OF ALL VERTICAL WALLS.
2. THE REMAINING PORTIONS OF THE WALLS AND WINGS FULL HEIGHT FOLLOWED BY SILLS/BAFFLES, ROOF SLAB AND HEADWALLS.

DIMENSIONS FOR WING LAYOUT AS WELL AS ADDITIONAL REINFORCING STEEL EMBEDDED IN BARREL ARE SHOWN ON THE WING SHEET.

AT THE CONTRACTOR'S OPTION, HE MAY SPLICE THE VERTICAL REINFORCING STEEL IN THE INTERIOR FACES OF THE EXTERIOR WALLS ABOVE THE LOWER WALL CONSTRUCTION JOINT. THE SPLICE LENGTH SHALL BE AS PROVIDED IN THE SPLICE LENGTH CHART SHOWN ON THE PLANS. EXTRA WEIGHT OF STEEL DUE TO SPLICES SHALL BE PAID FOR BY THE CONTRACTOR.

TRANSVERSE CONSTRUCTION JOINTS SHALL BE USED IN THE BARREL, SPACED TO LIMIT POURS TO A MAXIMUM OF 70 FEET. LOCATION OF JOINTS SHALL BE SUBJECT TO APPROVAL OF THE ENGINEER.

FOR CULVERT DIVERSION DETAILS AND PAY ITEM, SEE EROSION CONTROL PLANS.

A 3 FOOT STRIP OF FILTER FABRIC SHALL BE ATTACHED TO THE FILL FACE OF THE WING COVERING THE ENTIRE LENGTH OF THE EXPANSION JOINT.

NO PRECAST REINFORCED BOX CULVERT OPTION WILL BE ALLOWED.

THE ENGINEER, IN CONSULTATION WITH DEO STAFF, SHALL REVIEW ALL MATERIAL TO BE USED AS BACKFILL PRIOR TO CONDUCTING THE BACKFILL ACTIVITY. BACKFILL SHALL CONSIST OF NATIVE MATERIAL ONLY UNLESS THE ENGINEER, IN CONSULTATION WITH DEO STAFF, DETERMINES THAT (1) THE NATIVE MATERIAL IS UNSUITABLE, OR (2) ADDITIONAL MATERIAL IS REQUIRED TO SUPPLEMENT THE NATIVE MATERIAL. THE CHOSEN BACKFILL MATERIAL SHALL NOT HAVE ADVERSE EFFECTS TO AQUATIC LIFE, AQUATIC LIFE PASSAGE, OR WATER QUALITY. NATIVE MATERIAL CONSISTS OF MATERIAL THAT IS EXCAVATED FROM THE STREAM BED OR FLOODPLAIN AT THE PROJECT SITE DURING CULVERT CONSTRUCTION.

THE ENTIRE COST OF WORK REQUIRED TO PLACE EXCAVATED OR SUPPLEMENTAL MATERIAL AS SHOWN ON THE PLANS SHALL BE INCLUDED IN THE LUMP SUM PRICE FOR CULVERT EXCAVATION.

EXCAVATE A MINIMUM OF 1 FOOT BELOW CULVERT BEARING ELEVATION AND REPLACE WITH FOUNDATION CONDITIONING MATERIAL PER SECTION 414 OF THE STANDARD SPECIFICATIONS.

FOR SUBMITTAL OF WORKING DRAWINGS, SEE SPECIAL PROVISIONS.

FOR FALSEWORK AND FORMWORK, SEE SPECIAL PROVISIONS.

FOR CRANE SAFETY, SEE SPECIAL PROVISIONS.

FOR GROUT FOR STRUCTURES, SEE SPECIAL PROVISIONS.

## HYDRAULIC DATA

## OVERTOPPING FLOOD DATA

OVERTOPPING DISCHARGE ------1477 CFS FREQUENCY OF OVERTOPPING FLOOD --->500 YR. OVERTOPPING FLOOD ELEVATION -----390.0 \*

\* OVERTOPPING WILL OCCUR AT THE SHOULDER POINT AT STA. 110+80.15 -L-

## ROADWAY DATA

GRADE POINT EL. @ STA. 108+98.22 -L- = 389.03' INVERT ELEVATION @ STA. 108+98.22 -L- = 363.80' ROADWAY SLOPES 2:1

DRAWN BY: D.D. LOWERY
CHECKED BY: C.T. POOLE
DESIGN ENGINEER OF RECORD: A.L. PHILLIPS
DATE: 03/2024

-L- HORIZONTAL CURVE DATA

PI STA. 117+97.54


\$\Delta = 89^\cdot -13' - 43.9'' (LT)

D = 5^\cdot -12' - 31.3''

L = 1,713.07'

T = 1085.29'

R = 1,100.00'

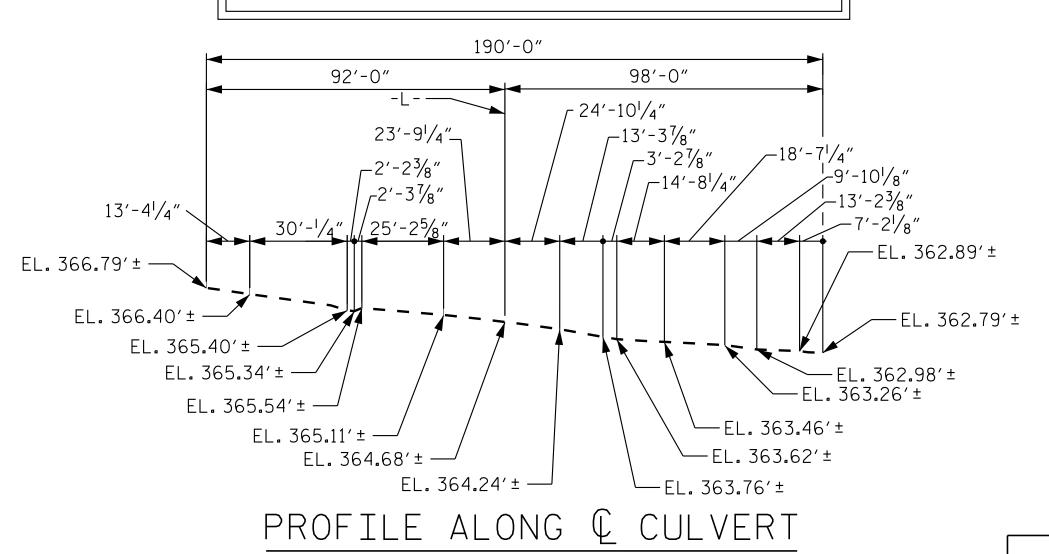

TOTAL STRUCTURE QUANTITIES CLASS A CONCRETE BARREL @ \_\_\_\_1.883\_\_ CY/FT \_\_\_\_357.7 \_\_\_C.Y. 22.7 WINGS ETC.\_ \_ C.Y. 3.7 SILLS \_ C.Y. 384.1 TOTAL. C.Y. REINFORCING STEEL 60,118 BARREL LBS. 1,321 LBS. WINGS ETC. \_ 61,439

TOTAL 61,439 LBS.

CULVERT EXCAVATION STA. 108+98.22 -L- LUMP SUM
FOUNDATION CONDITIONING MATERIAL 224 TONS

Docusighed by PO

PROJECT NO. R-5930B

CHATHAM COUNTY

STATION: 108+98.22 -L-

SHEET 1 OF 6

DEPARTMENT OF TRANSPORTATION
RALEIGH

SINGLE 11 FT. X 7 FT.

CONCRETE BOX CULVERT

60° SKEW

STATE OF NORTH CAROLINA

Raleigh, NC 27601-1772

Phone (919) 677-2000

NC LICENSE #
F-0102

No. BY:

No. BY:

DATE:

NO. BY:

DATE:

TOTAL
SHEET Sind and Associates, Inc., 2024

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

CULVERT 42C003