


PROJECT REFERENCE NO.	SHEET NO.
U-4405B	EC-25/CONST.20
RW SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER

NC GRID
NAD 83/NA 2011

-L-
PI Sta 220+67.31
 $\Delta = 1^{\circ}04'31.9"$ (LT)
 $D = 0^{\circ}34'22.6"$
 $L = 187.71'$
 $T = 93.86'$
 $R = 10,000.00'$
SE = NC

INSTALL FABRIC INSERT INLET PROTECTION DEVICE IN LIEU OF ROCK INLET SEDIMENT TRAP TYPE 'C' AS DIRECTED TO AVOID PONDING OF RUNOFF IN ROADWAY OPEN TO PUBLIC TRAFFIC

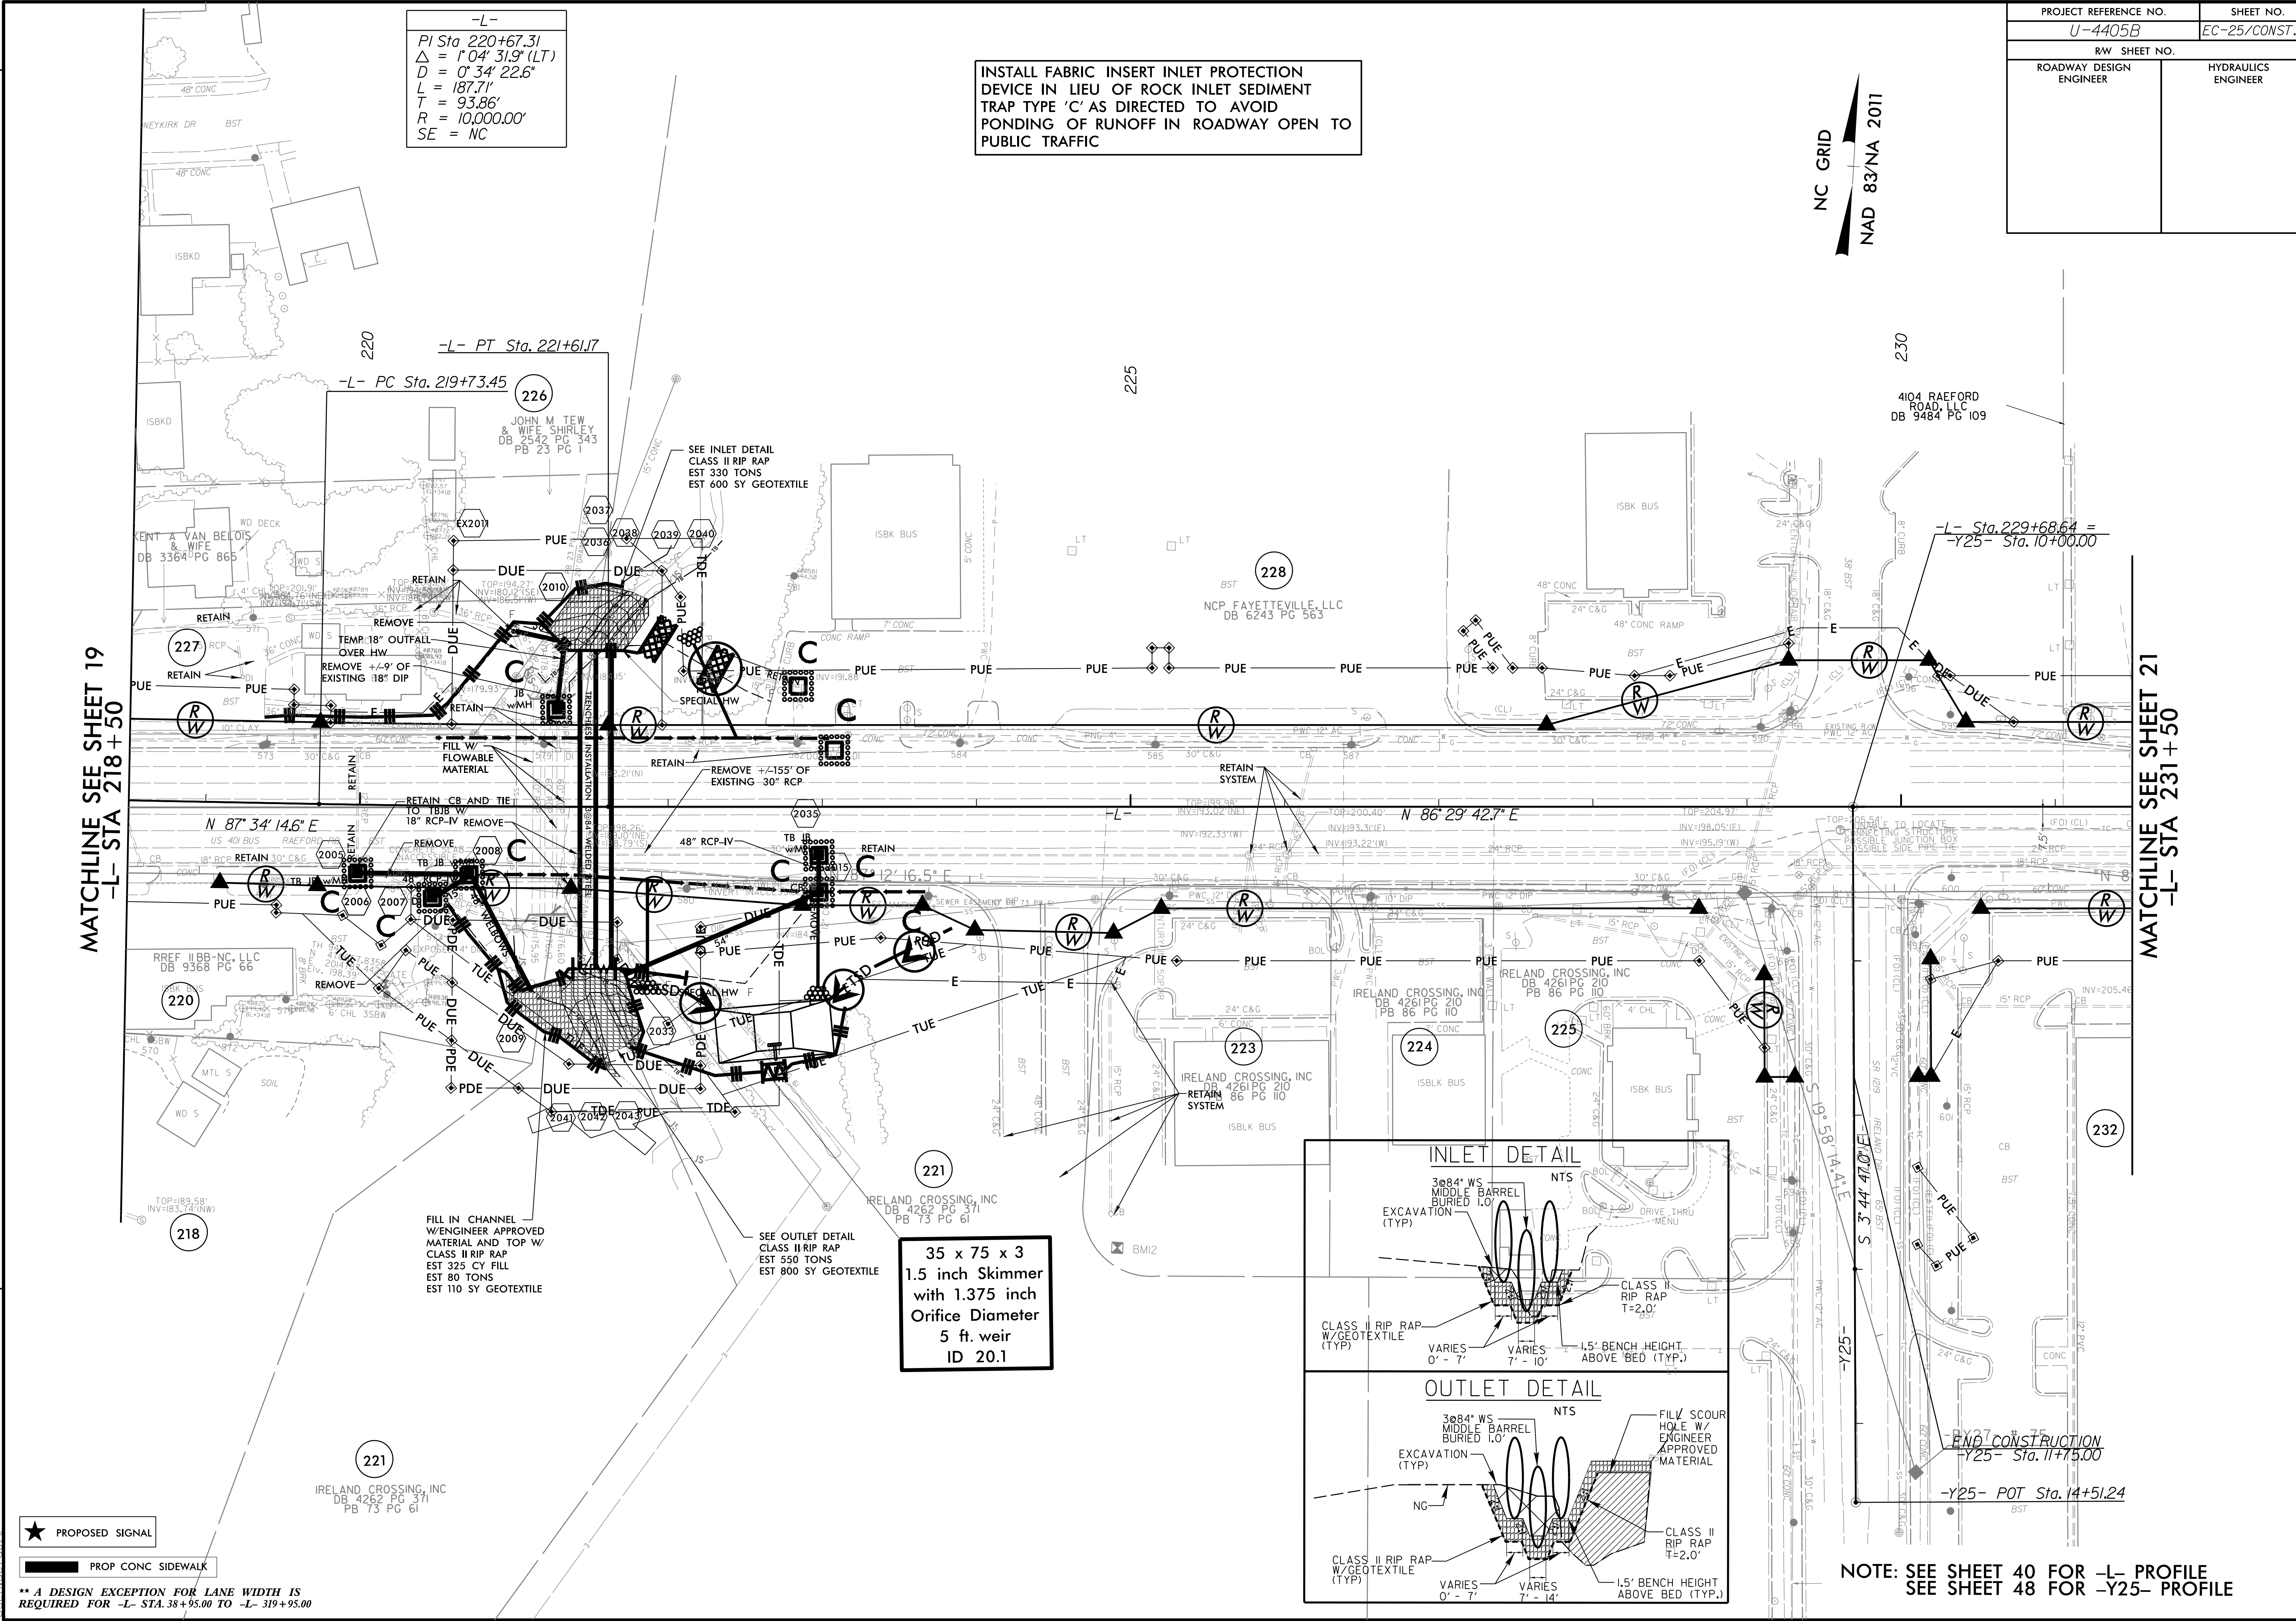

MATCHLINE SEE SHEET 19
-L- STA 218+50

MATCHLINE SEE SHEET 21
-L- STA 231+50


REVISIONS

10/8/2024
U:\4405B_REU_EC_psh_20_Final.dgn
10/8/2024

- ★ PROPOSED SIGNAL
- ▬ PROP CONC SIDEWALK

** A DESIGN EXCEPTION FOR LANE WIDTH IS REQUIRED FOR -L- STA. 38+95.00 TO -L- 319+95.00

35 x 75 x 3
1.5 inch Skimmer
with 1.375 inch
Orifice Diameter
5 ft. weir
ID 20.1

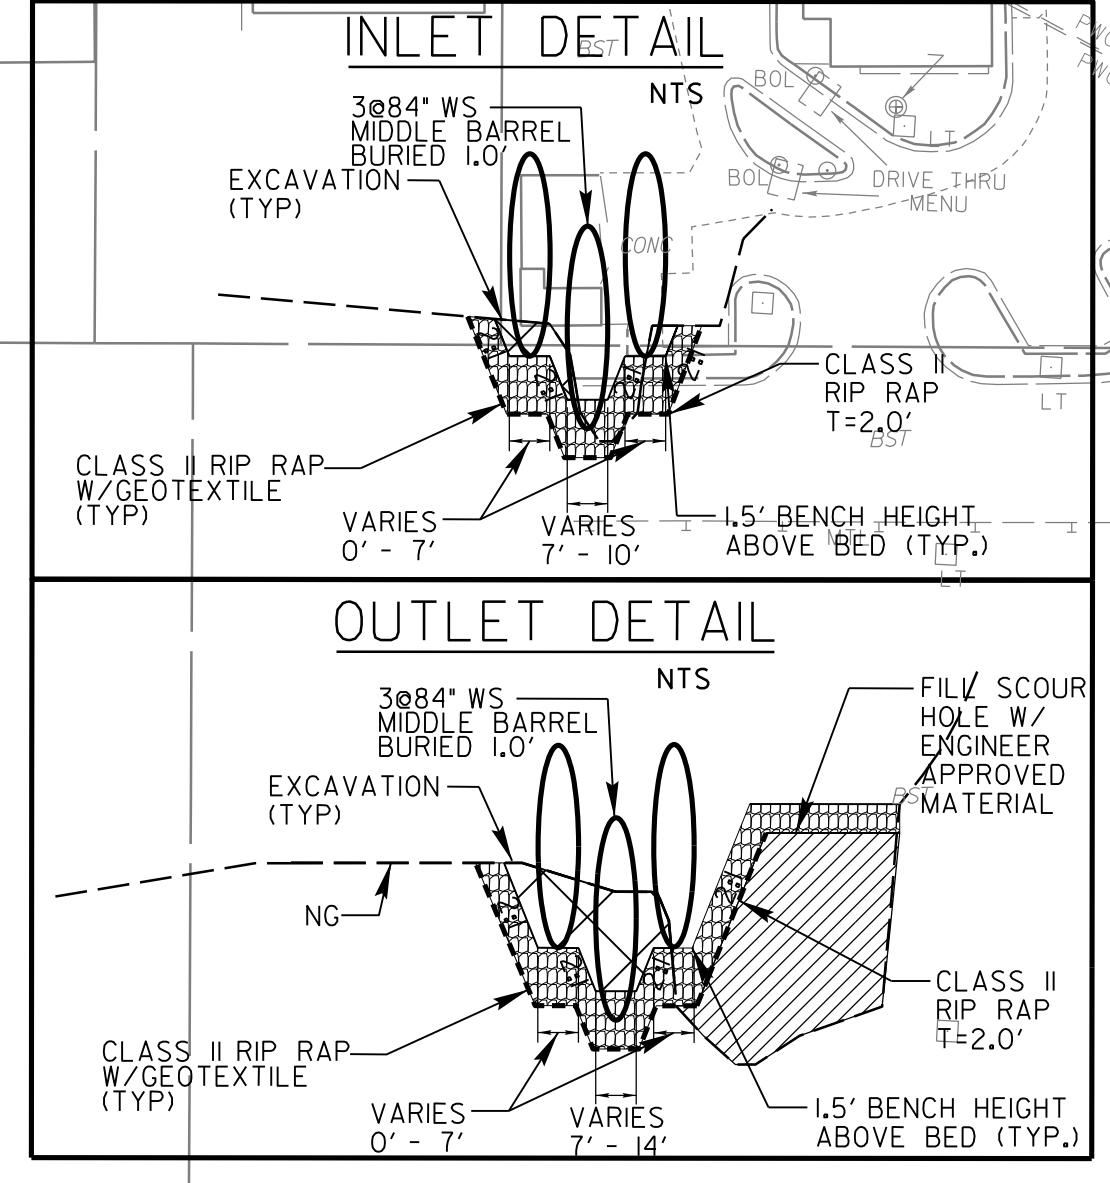

NOTE: SEE SHEET 40 FOR -L- PROFILE
SEE SHEET 48 FOR -Y25- PROFILE