


NOTES:


1. UNLESS OTHERWISE NOTED: -ATTACH NEW MESSENGER CABLE MINIMUM 40 INCHES BELOW POWER. -ATTACH ON FRONT SIDE (FS) OF POLE.

2. TWO (2) WEEKS PRIOR TO BEGINNING WORK ON THE SIGNAL SYSTEM, CONTACT THE CITY OF HICKORY SIGNAL SYSTEMS MANAGEMENT ENGINEER AT (828) 323-7500 TO ARRANGE FOR THE CITY TO PROGRAM THE NEW FIELD ETHERNET SWITCHES WITH THE NECESSARY NETWORK CONFIGURATION DATA, INCLUDING BUT NOT LIMITED TO: THE PROJECT IP ADDRESS, DEFAULT GATEWAY, SUBNET MASK AND VLAN ID INFORMATION. NOTIFY THE SIGNAL SYSTEMS MANAGEMENT ENGINEER AFTER ALL WORK IS PERFORMED TO ENSURE THAT ALL FIBER CIRCUITS ARE FUNCTIONING PROPERLY. WORK IS NOT COMPLETE UNTIL THE SIGNAL SYSTEM IS BACK UP AND FUNCTIONAL.

3. UNLASH EXISTING FIBER FROM EXISTING MESSENGER CABLE AND RELASH TO NEW MESSENGER CABLE TO NEW POLE.

HNTB NORTH CAROLINA, P.C. 4000 Center at North Hills St Suite 500 Raleigh, North Carolina 27609 NC License No: C-1554 (919) 546-8997

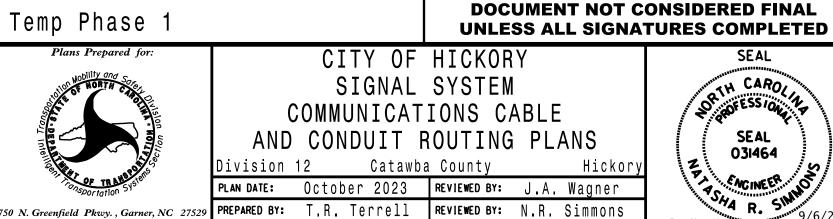



PREPARED BY: T.R. Terrell REVIEWED BY: N.R. Simmons N/ACADD Filename: U5777 SCP-2.dgn