

Diagram illustrating the layout of a street lighting system, showing the arrangement of fixtures, pole, and roadway clearance specifications.

Horizontal Dimensions (Total Span: 70'):

- 1' (from left edge to first fixture)
- 3' (between first and second fixtures)
- 12' (between second and third fixtures)
- 6' (between third and fourth fixtures)
- 6' (between fourth and fifth fixtures)
- 12' (between fifth and sixth fixtures)
- 4' (between sixth fixture and pole)
- 26' (from pole to right edge)


Vertical Dimensions and Specifications:

- 5' Rise (from roadway surface to fixture height)
- Maximum 25.6 ft. (overall height from roadway surface to top of pole)
- Roadway Clearance Design Height 17 ft. Minimum 16.5 ft. (clearance from roadway surface to bottom of fixtures)
- 11 feet See Note 6f (horizontal distance from pole to fixture)
- H2 See Note 7 (height from roadway surface to top of pole)
- H1=14.3 See Note 6 (height from roadway surface to bottom of pole)

Other Labels:

- Street Name (on fixture)
- 2 (on fixtures)
- See Note 4 (near pole)
- See Note 6e (near roadway surface)
- See Note 6f (near roadway surface)
- See Note 6d (near roadway surface)
- Edge of travelway or face of curb (near roadway surface)
- Base line reference elev. = 0.0' (near roadway surface)
- High Point of Roadway Surface (near roadway surface)
- ☑ Pole (near pole)
- ☑ Foundation (near pole)


Design Loading for METAL POLE NO. 4

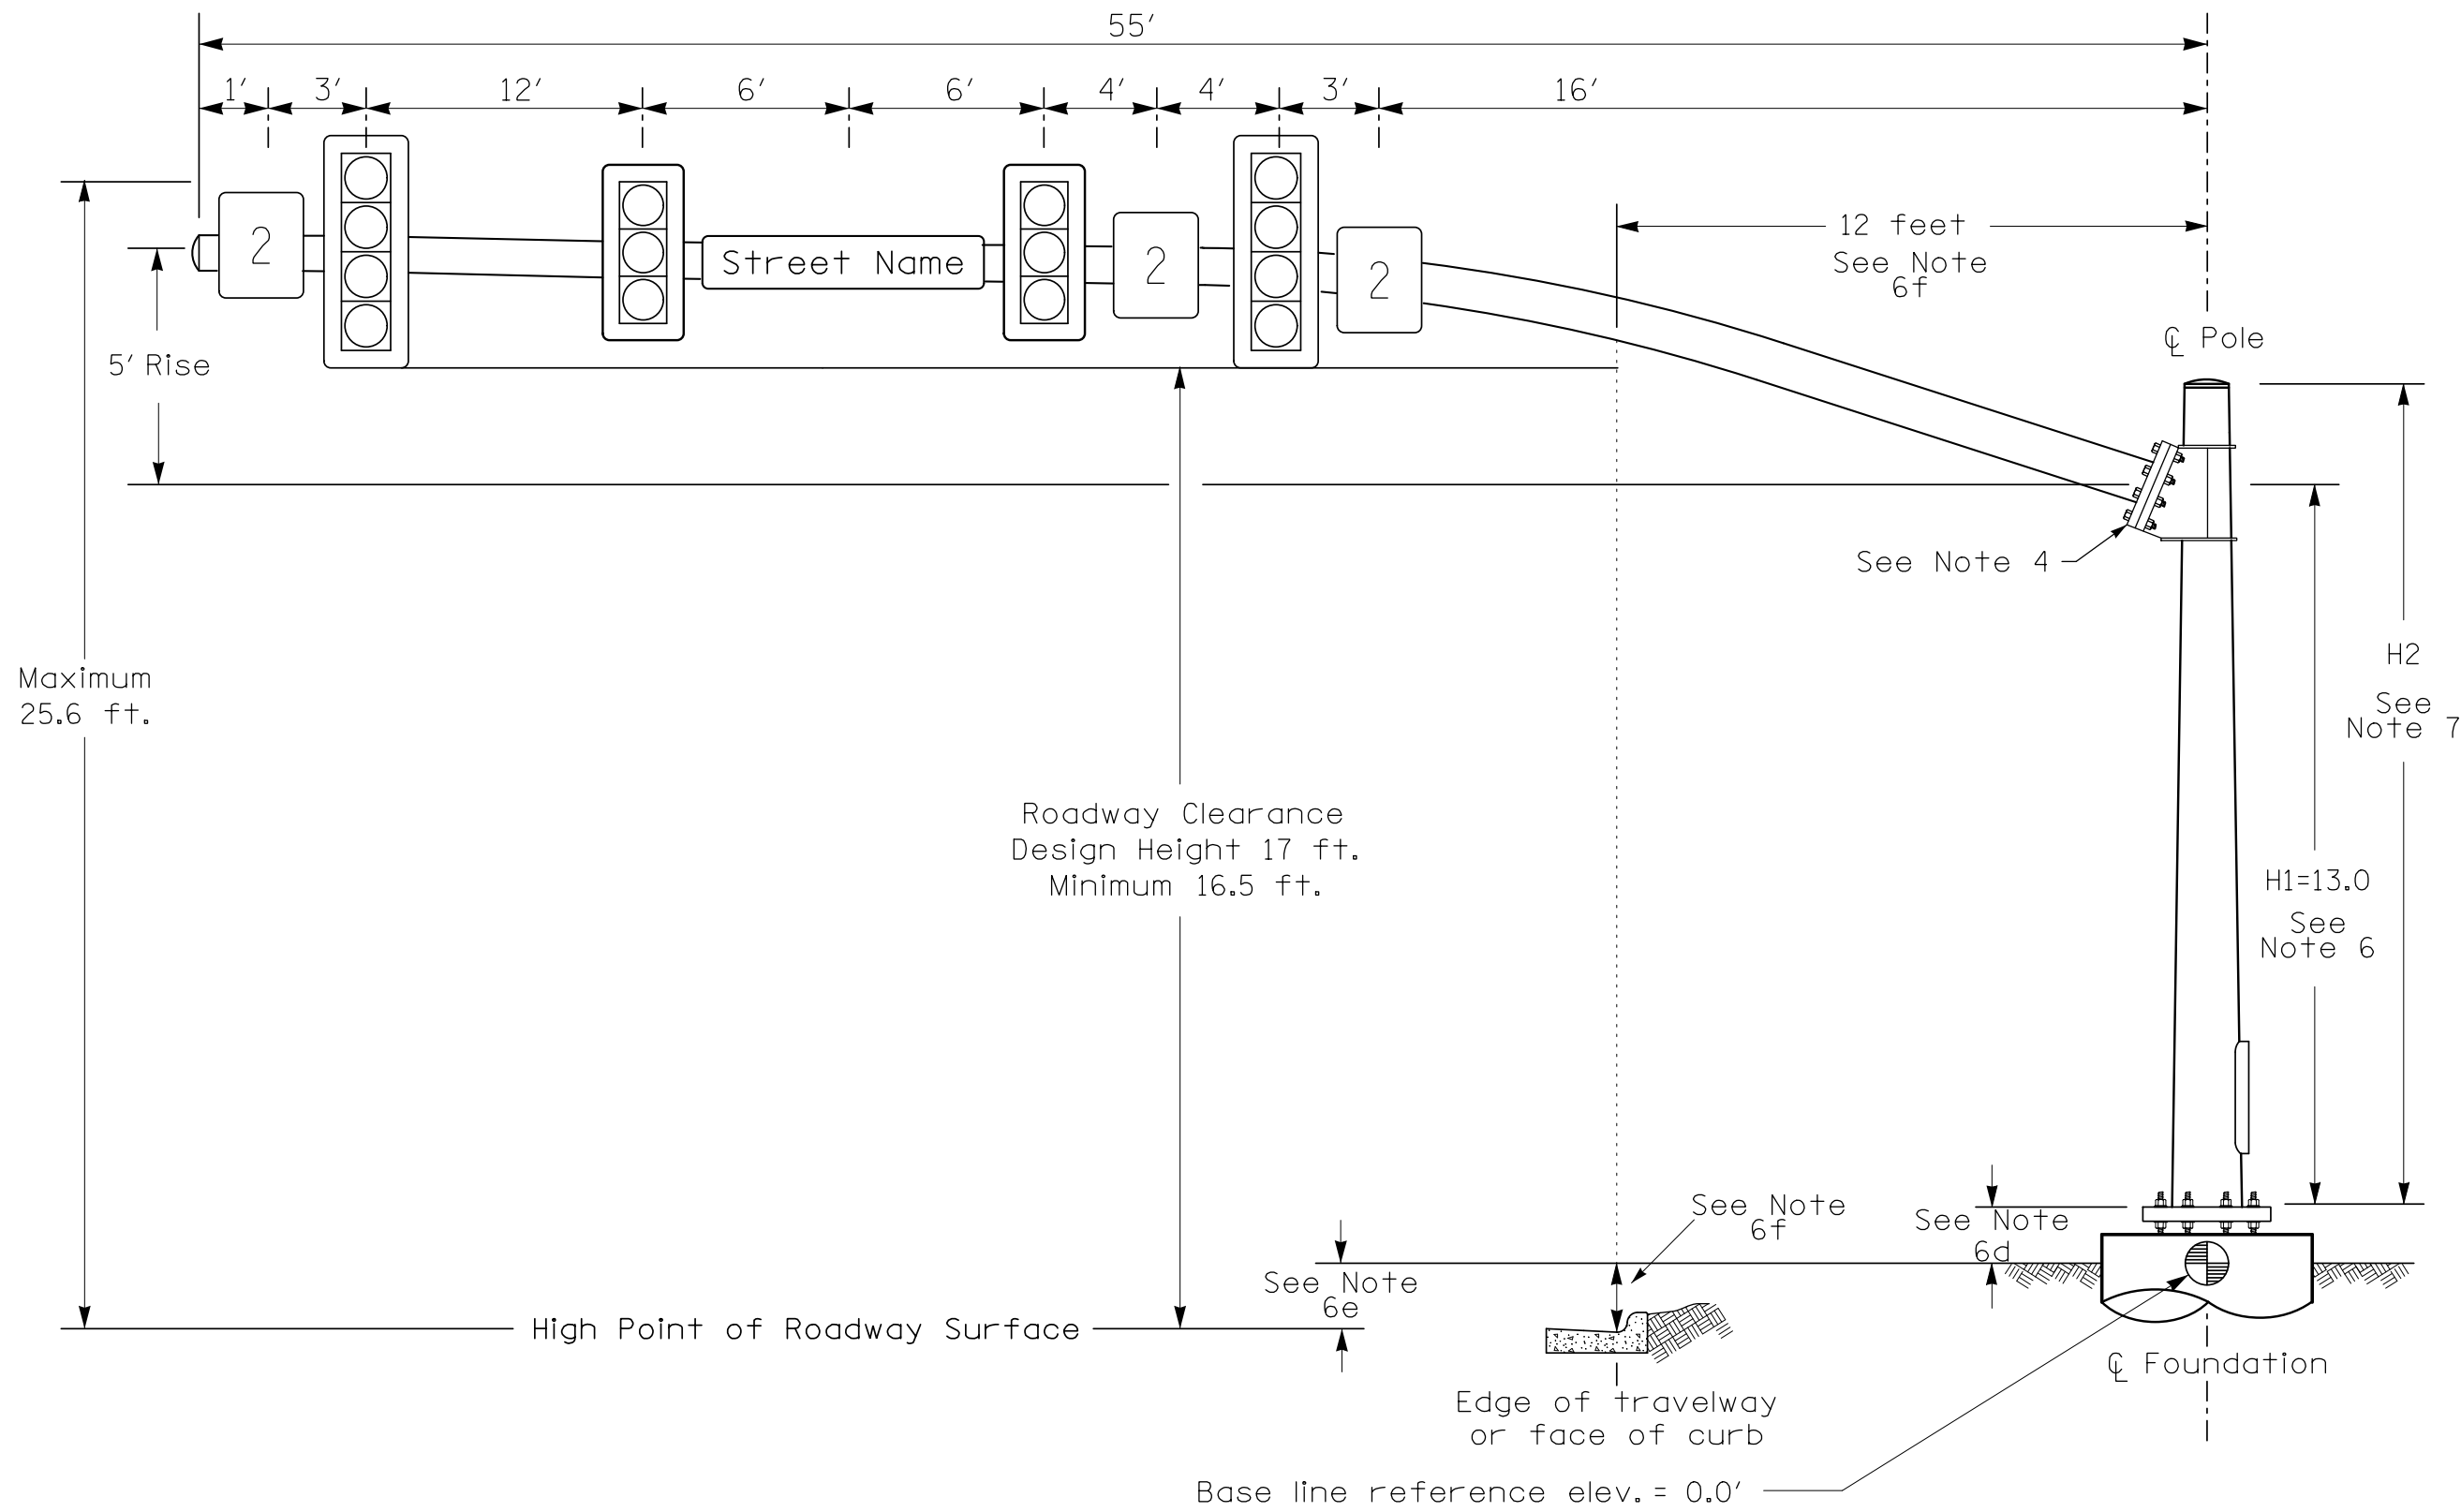


SPECIAL NOTE


The contractor is responsible for verifying that the mast arm attachment height (H1) will provide the "Design Height" clearance from the roadway before submitting final shop drawings for approval. Verify elevation data below which was obtained by field measurement or from available project survey data.

Elevation Data for Mast Arm Attachment (H1)

Elevation Differences for:	Pole 3	Pole 4
Baseline reference point at ☐ Foundation @ ground level 	0.0 ft.	0.0 ft.
Elevation difference at High point of roadway surface	+0.3 ft.	-1.0 ft.
Elevation difference at Edge of travelway or face of curb	+1.9 ft.	-1.0 ft.

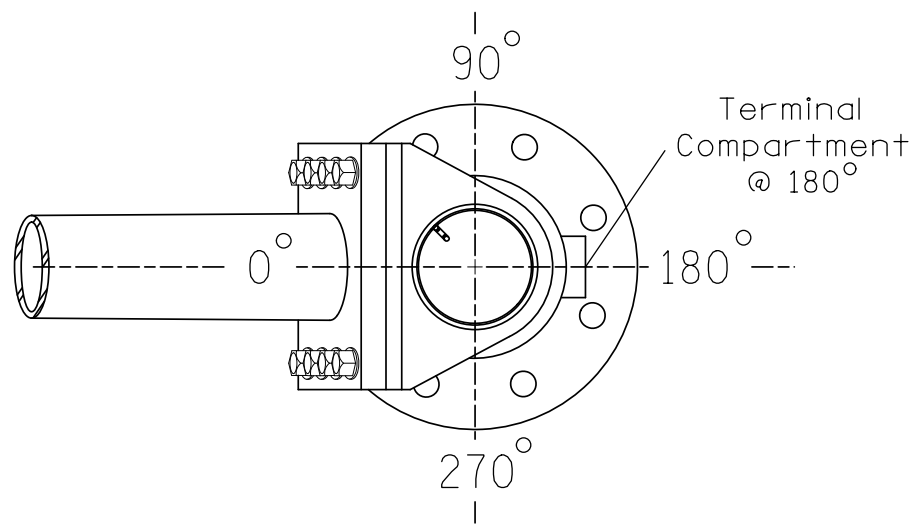


POLE RADIAL ORIENTATION

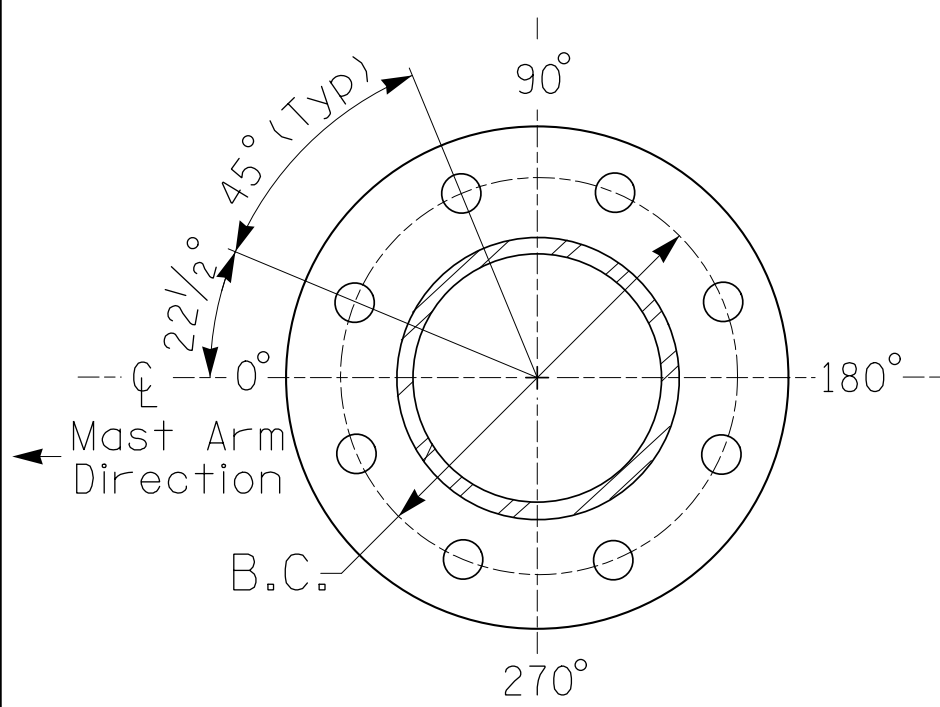

8 BOLT BASE PLATE DETAIL

See Note 5

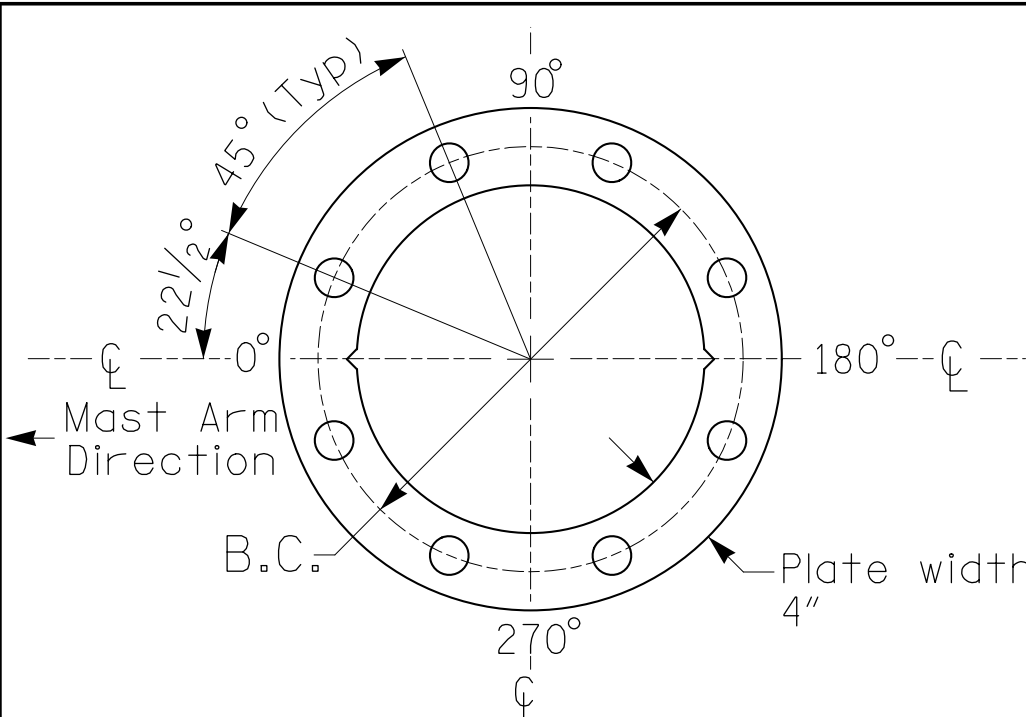






BASE PLATE TEMPLATE & ANCHOR BOLT
LOCK PLATE DETAIL
For 8 Bolt Base Plate

METAL POLE No. 3 and 4

PROJECT REFERENCE NO.	SHEET NO.
R-5963A	Sig. 2.4

MAST ARM LOADING SCHEDULE

LOADING SYMBOL	DESCRIPTION	AREA	SIZE	WEIGHT
	RIGID MOUNTED SIGNAL HEAD 12'-4 SECTION-WITH BACKPLATE	11.5 S.F.	25.5" W X 66.0" L	74 LBS
	RIGID MOUNTED SIGNAL HEAD 12'-3 SECTION-WITH BACKPLATE	9.3 S.F.	25.5" W X 52.5" L	60 LBS
	STREET NAME SIGN RIGID MOUNTED	16.0 S.F.	24.0" W X 96.0" L	36 LBS
	SIGN RIGID MOUNTED	7.5 S.F.	30.0" W X 36.0" L	14 LBS
	PEDESTRIAN SIGNAL HEAD WITH MOUNTING HARDWARE	2.2 S.F.	18.5" W X 17.0" L	21 LBS

NOTES

DESIGN REFERENCE MATERIAL

1. Design the traffic signal structure and foundation in accordance with:
 - The 1st Edition 2015 AASHTO LRFD "Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals, including all of the latest interim revisions.
 - The 2024 NCDOT "Standard Specifications for Roads and Structures." The latest addenda to the specifications can be found in the traffic signal project special provisions.
 - The 2024 NCDOT Roadway Standard Drawings.
 - The traffic signal project plans and special provisions.
 - The NCDOT "Metal Pole Standards" located at the following NCDOT website:
<https://connect.ncdot.gov/resources/safety/Pages/ITS-Design-Resources.aspx>

DESIGN REQUIREMENTS

2. Design the traffic signal structure using the loading conditions shown in the elevation views. These are anticipated worst case "design loads" and may not represent the actual loads that will be applied at the time of the installation. The contractor should refer to the traffic signal plans for the actual loads that will be applied at the time of the installation.
3. Design all signal supports using force ratios that do not exceed 0.9.
4. A clamp-type bolted mast arm-to-pole connection may be used instead of the welded ring stiffened box connection shown as long as the connection meets all of the design requirements.
5. Design base plate with 8 anchor bolt holes. Provide 2 inch x 60 inch anchor bolts.
6. The mast arm attachment height (H1) shown is based on the following design assumptions:
 - a. Nominal vertical rise in mast arm is 5 feet as measured from the centerline of the arm base to the centerline of the free end of the arm.
 - b. Signal heads are rigidly mounted and vertically centered on the mast arm.
 - c. The roadway clearance height for design is as shown in the elevation views.
 - d. The top of the pole base plate is 0.75 feet above the ground elevation.
 - e. Refer to the Elevation Data Chart for the elevation differences between the proposed foundation ground level and the high point of the roadway.
 - f. Provide horizontal distance from the proposed centerline of the foundation to the edge of travelway. Refer to the Elevation Data Chart for elevation difference between the proposed foundation ground level and the edge of travelway. This information is necessary to ensure that the roadway clearance is maintained at the edge of the travelway and to aid in the camber design of the arm.
7. The pole manufacturer will determine the total height (H2) of each pole using the greater of the following:
 - Mast arm attachment height (H1) plus 2 feet, or
 - H1 plus 1/2 of the total height of the mast arm attachment assembly plus 1 foot.
8. If pole location adjustments are required, the contractor must gain approval from the Engineer as this may affect the mast arm lengths and arm attachment heights. The contractor may contact the Signal Design Section Senior Structural Engineer for assistance at (919) 814-5000.
9. The contractor is responsible for verifying that the mast arm length shown will allow proper positioning of the signal heads over the roadway.
10. The contractor is responsible for providing soil penetration testing data (SPT) to the pole manufacturer so site specific foundations can be designed.

All metal poles and arms should be agate gray in color as specified in the project special provisions.

PLANS PREPARED IN THE OFFICE OF:

Kimley»Horn
NC License #F-0102
421 Fayetteville Street, Suite 600
Raleigh, NC 27601
(919) 677-2000

DOCUMENT NOT CONSIDERED
FINAL UNLESS ALL
SIGNATURES COMPLETED

SEAL

NORTH CAROLINA
PROFESSIONAL
SEAL
044434
ENGINEER
KEVIN P. BAUMANN

DocuSigned by
Kevin Baumann
SDC700A80BCB447


3/4/2025

SIGNATURE DATE

SIG. INVENTORY NO. 08-0525

NCDOT Wind Zone 5 (110 mph)

Prepared for the Offices of

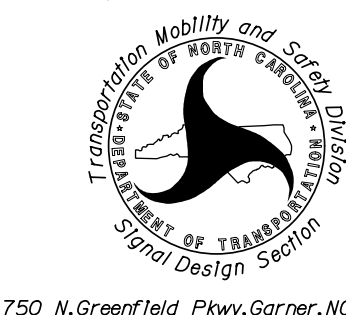

750 N.Greenfield Pkwy.Garner,NC 27529

SCALE

0 N/A

A horizontal line segment with a vertical tick mark at the left end labeled '0' and a vertical tick mark at the right end labeled 'N/2'.

■■■■■

SR 2700 (Chatham Park Way)
at
South Village Parkway

Division 8 Chatham County Pittsboro

PLAN DATE: October 2024	REVIEWED BY: KP Baumar
-------------------------	------------------------

PREPARED BY: SP Pennington	REVIEWED BY:
----------------------------	--------------

REVISIONS	INIT.	
-----------	-------	--

REVISIONS	DATE	BY

[illegible][illegible][illegible]