PROJECT I.D. NO.

SHEET NO.


1. OPENING IN POLE BASE PLATE SHALL BE EQUAL TO POLE BASE INSIDE DIAMETER MINUS 31/2" BUT SHALL NOT BE LESS THAN $8\frac{1}{2}$ ".

2 CABLE CLAMPS DESIGNED FOR


VARIABLE ATTACHMENT HEIGHTS

FROM 1'-6" TO 6'-6" BELOW


THE TOP OF THE POLE

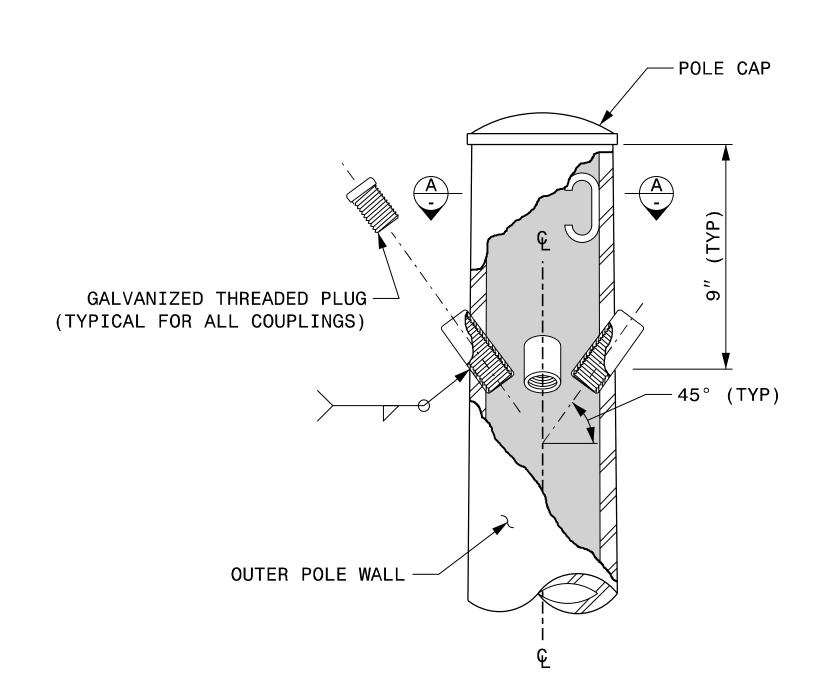

CABLE ENTRANCES AT TOP OF POLE

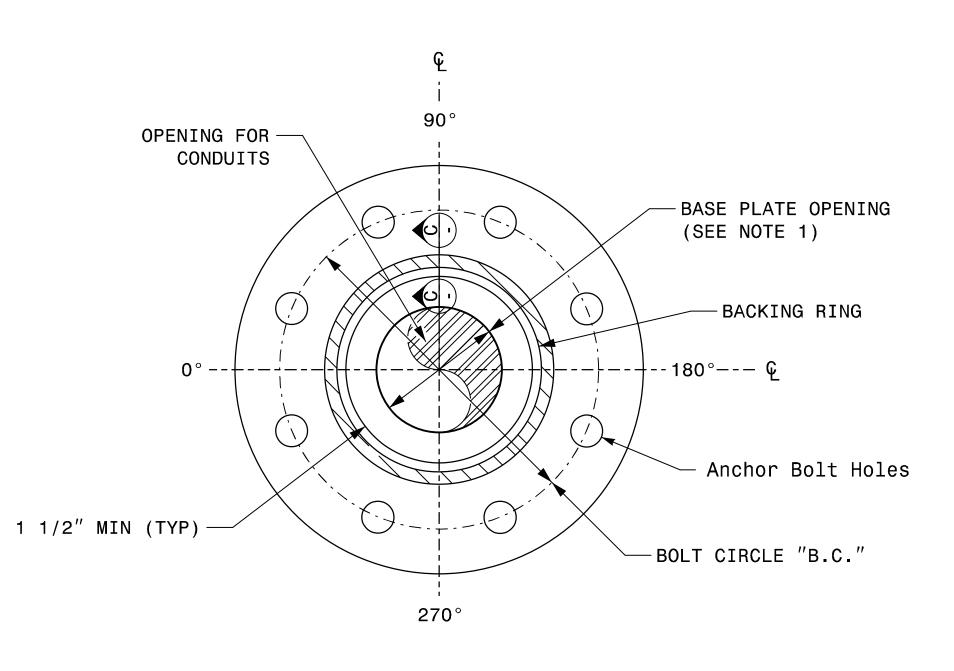


SECTION B-B POLE BASE PLATE DETAILS (8 AND 12 BOLT PATTERN)

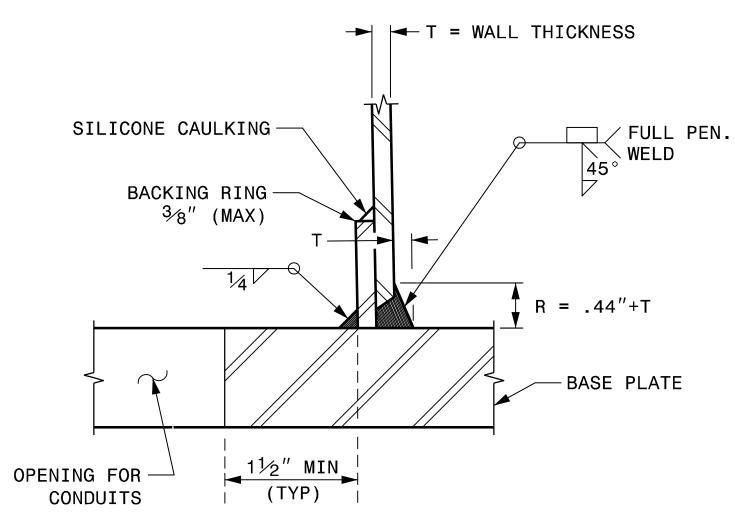

SECTION C-C (POLE ATTACHMENT TO BASE PLATE)

FULL-PENETRATION GROOVE WELD DETAIL

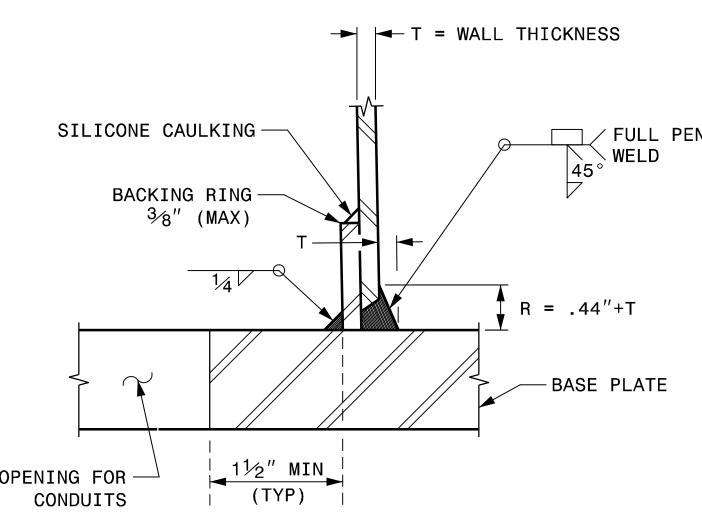

NONE

Typical Fabrication Details Strain Poles

SHAFT I.D. TAG —

(SEE DRAWING M2)

TERMINAL COMPARTMENT —

ANCHOR BOLT


(SEE DRAWING M2)

(SEE DRAWING M2)

section Section		001 0111	10100		
		SEPTEMBER 2023	DESIGNED BY:	K.C. [URIGON
Garner.NC 27529	PREPARED BY:	K.C. DURIGON	REVIEWED BY:	D.C.	SARKAR
NΙΔ		REVISIONS		INIT.	DATE
NA 					

SEAL Kevin Dusigon 09/21/2023 DATE

MONOTUBE STRAIN POLE

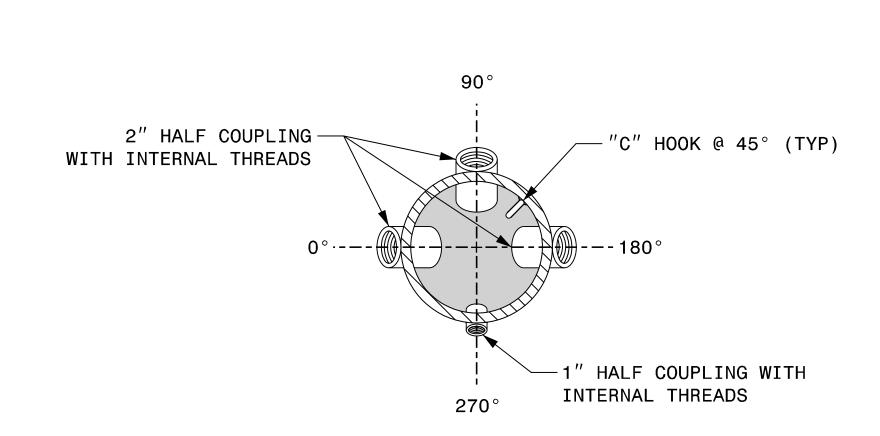

SECTION A-A

RADIAL ORIENTATION OF FACTORY INSTALLED ACCESSORIES AT TOP OF POLE