


8/17/99


REVISIONS

FINAL PAVEMENT SCHEDULE					
A1	PROP. 11.5" PORTLAND CEMENT CONCRETE PAVEMENT WITH DOWELS.	E2	PROP. APPROX. 5.0" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 570 LBS. PER SQ. YD.	R5	2'-0" MODIFIED VALLEY CURB (SEE SHEET 2A-7 FOR DETAIL)
B1	PROP. 0.75" ULTRA-THIN BONDED WEARING COURSE	E3	PROP. APPROX. 9" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 513 LBS. PER SQ. YD. IN EACH OF TWO LAYERS	R6	SHOULDER BERM GUTTER
C1	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.	E4	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 5 1/2" IN DEPTH.	S	4" CONCRETE SIDEWALK
C2	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.	J1	PROP. 10" AGGREGATE BASE COURSE.	T	EARTH MATERIAL
C3	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.	K1	PROP. 8" CLASS IV SUBGRADE STABILIZATION.	U	EXISTING PAVEMENT.
C4	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.	K2	PROP. 12" CLASS IV SUBGRADE STABILIZATION.	V1	MILLING ASPHALT PAVEMENT 1.5" DEPTH
C5	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 1 1/2" IN DEPTH OR GREATER THAN 2" IN DEPTH.	N1	GEOTEXTILE FOR SUBGRADE STABILIZATION	V2	MILLING ASPHALT PAVEMENT 2.25" DEPTH
C6	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 1 1/2" IN DEPTH OR GREATER THAN 2" IN DEPTH.	R1	2'-6" MODIFIED CONCRETE CURB AND GUTTER (SEE SHEET 2A-7 FOR DETAIL)	V3	VARIABLE DEPTH MILLING ASPHALT PAVEMENT 0" TO 1.5" DEPTH INCIDENTAL MILLING
D1	PROP. APPROX. 4.0" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.	R2	2'-6" CONCRETE CURB AND GUTTER	W	VARIABLE DEPTH ASPHALT PAVEMENT. (SEE DETAIL NO. 1 SHOWING METHOD OF WEDGING) (SEE SHEET 2A-1)
D2	PROP. VAR. DEPTH ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 2 1/2" IN DEPTH OR GREATER THAN 4" IN DEPTH.	R3	5" MONOLITHIC CONCRETE ISLAND (KEYED IN)	Y	RUMBLE STRIPS
E1	PROP. APPROX. 4.0" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.	R4	9" JOINTED CONCRETE TRUCK APRON w/WELDED WIRE MESH (4X4 W4.5 X W4.5 OR 6X6 W7 X W7) 15' RADIAL JOINT SPACING		


NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

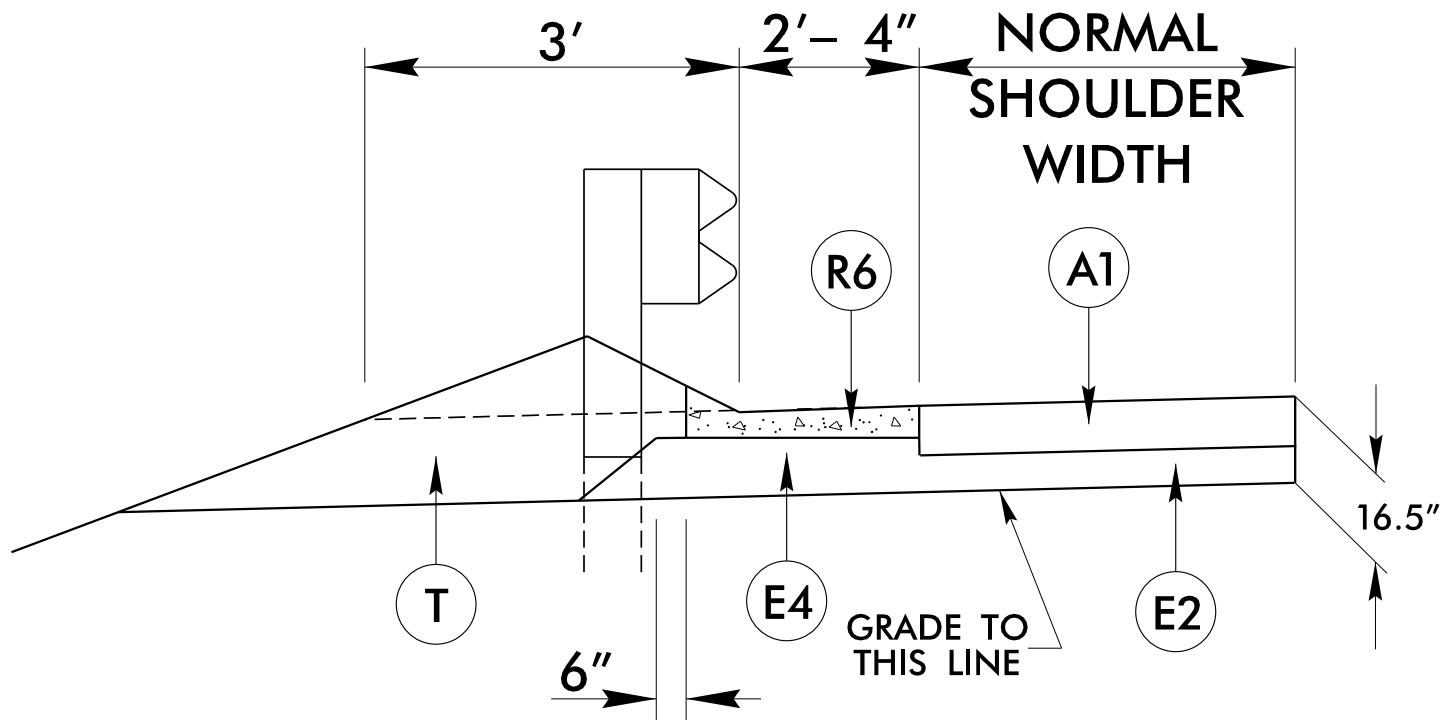


-L- 37+82.00 TO STA. 38+10.00 RT
-L- 38+72.00 TO STA. 38+90.00 LT
SEE STANDARD 846.01

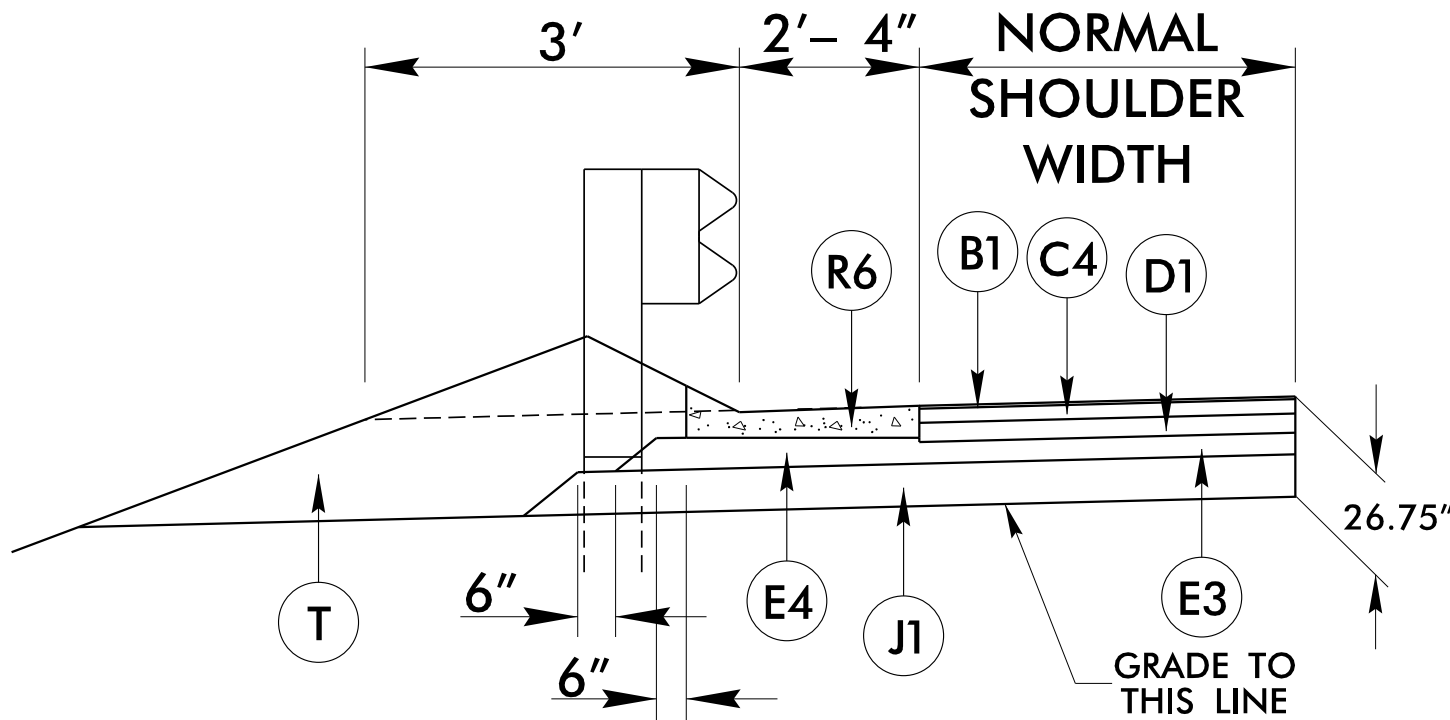


-L- 40+65.00 TO STA. 41+05.00 LT
-L- 39+85.00 TO STA. 40+50.00 RT
SEE STANDARD 846.01

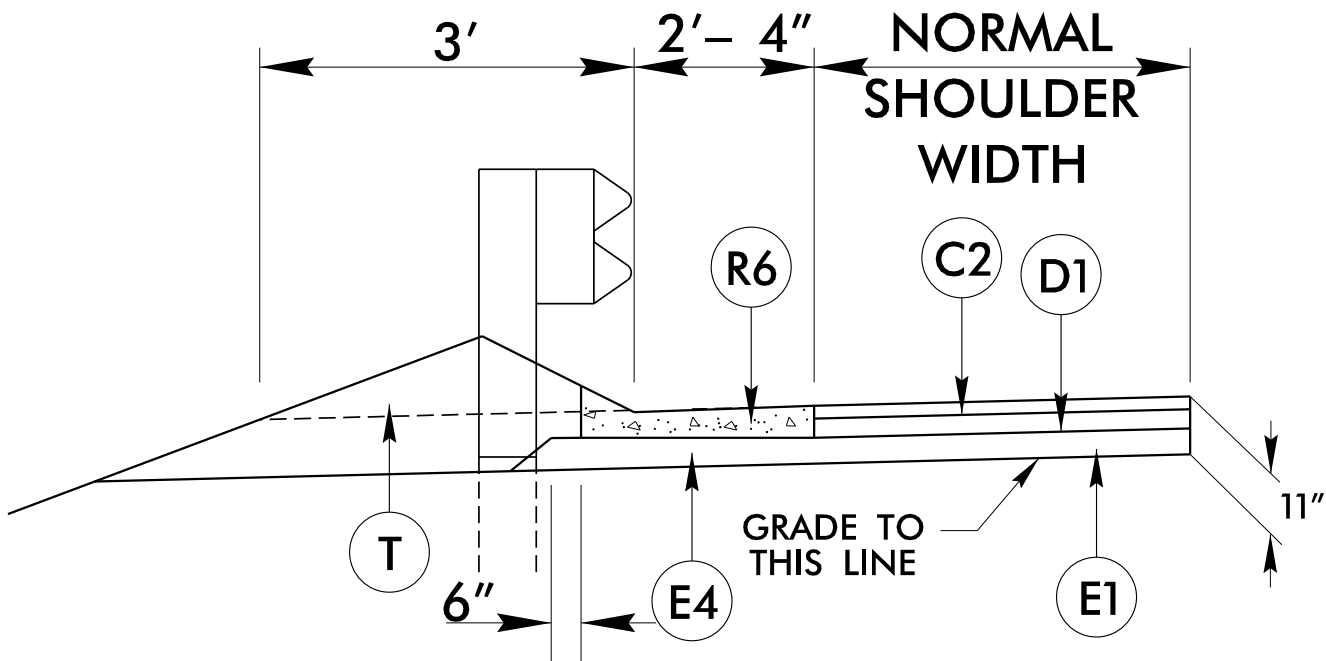

-RPC- 16+25.00 TO STA. 40+50.00 RT
SEE STANDARD 846.01

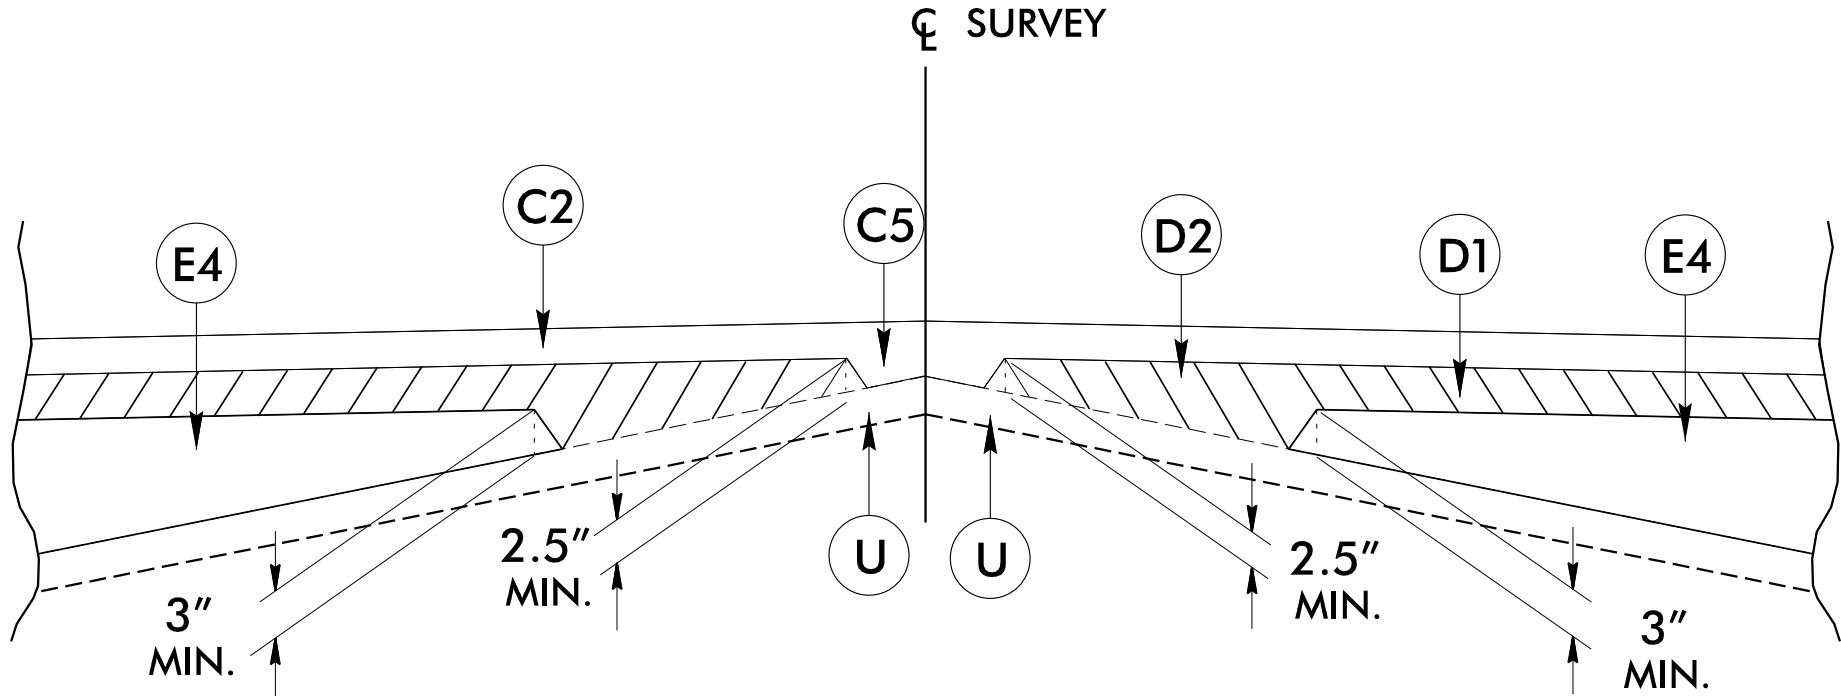


Detail Showing Method of Wedging No. 1

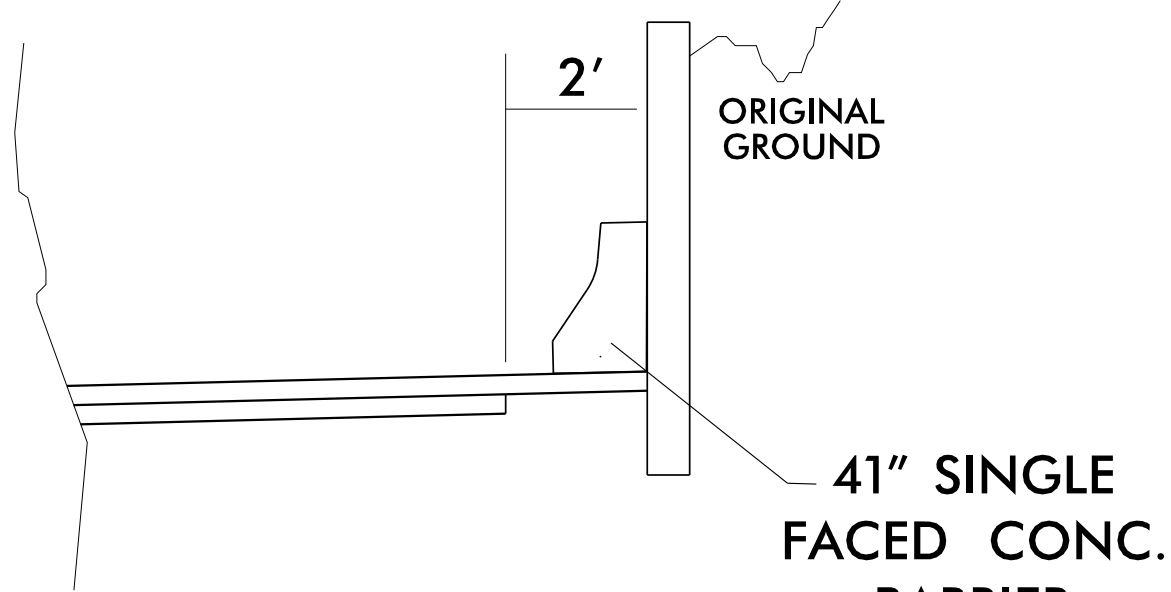

NOISE WALL DETAIL

-L- STA. 25+10.00 TO STA. 27+70.00 LT

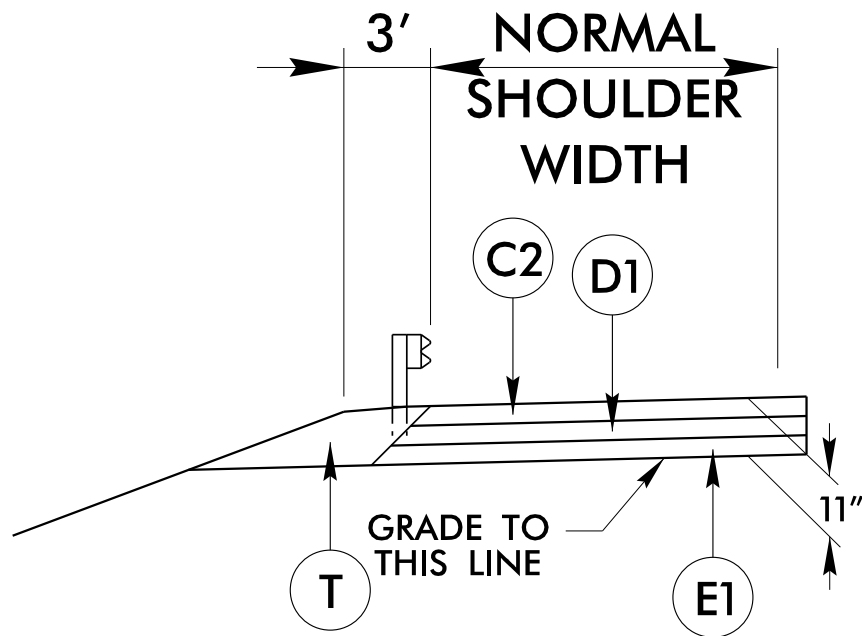

DETAIL FOR ADDITIONAL WIDENING FOR GUARDRAIL

-RPB- STA. 10+00.00 TO STA. 13+70.00 RT
-RPC- STA. 10+00.00 TO STA. 20+84.00 LT



Johnson, Mirman, & Thompson, Inc.
4700 Falls of Neuse Rd, Suite 100,
Raleigh, NC, 27609
License No. C-3097

PROJECT REFERENCE NO. <i>1-5880</i>		SHEET NO. <i>2A-1</i>	
RW SHEET NO.			
ROADWAY DESIGN ENGINEER		PAVEMENT DESIGN ENGINEER	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED			