



**This electronic collection of documents is provided
for the convenience of the user
and is Not a Certified Document –**

**The documents contained herein were originally issued
and sealed by the individuals whose names and license
numbers appear on each page, on the dates appearing
with their signature on that page.**

**This file or an individual page
shall not be considered a certified document.**

TIP NO.	SHEET NO.
B-4814	PMP-1
APPROVED:  F32AC5CAF965472	
DATE: 8/9/2016	
SEAL	
	

**STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION**

**PAVEMENT MARKING PLAN
SAMPSON COUNTY**

**LOCATION: BRIDGES NO. 102, 103, AND 104 OVER LITTLE
COHARIE CREEK ON SR 1233 (AUTRYVILLR RD.)**

T.I.P.: B-4814

CONTRACT: C203824

ROADWAY STANDARD DRAWING

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2012 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
1205.01	PAVEMENT MARKINGS - LINE TYPES AND OFFSETS
1205.02	PAVEMENT MARKINGS - TWO-LANE AND MULTILANE ROADWAYS
1205.12	PAVEMENT MARKINGS - BRIDGES
1261.01	GUARDRAIL AND BARRIER DELINEATORS - INSTALLATION SPACING
1261.02	GUARDRAIL AND BARRIER DELINEATORS - TYPES AND MOUNTING
1262.01	GUARDRAIL END DELINEATION

GENERAL NOTES

THE FOLLOWING GENERAL NOTES APPLY AT ALL TIMES FOR THE DURATION OF THE CONSTRUCTION PROJECT, EXCEPT WHEN OTHERWISE NOTED IN THE PLAN, OR DIRECTED BY THE ENGINEER.

- A) INSTALL PAVEMENT MARKINGS AND PAVEMENT MARKERS ON THE FINAL SURFACE AS FOLLOWS:

ROAD NAME	MARKING	MARKER
ALL -L- (SR 1233)	- POLYUREA W/ HIGHLY REFLECTIVE ELEMENTS	RAISED MARKER

- B) TIE PROPOSED PAVEMENT MARKING LINES TO EXISTING PAVEMENT MARKING LINES.
 C) REMOVE/REPLACE ANY CONFLICTING/DAMAGED PAVEMENT MARKINGS AND MARKERS.
 D) PASSING ZONES WILL BE DETERMINED IN THE FIELD AND MUST BE APPROVED BY THE ENGINEER.
 E) REMOVE ALL RESIDUE AND SURFACE LAITANCE BY ACCEPTABLE METHODS ON CONCRETE BRIDGE DECKS PRIOR TO PLACING THERMOPLASTIC PAVEMENT MARKING MATERIAL.
 F) REMOVE ALL RESIDUE AND SURFACE LAITANCE BY ACCEPTABLE METHODS ON CONCRETE BRIDGE DECKS PRIOR TO PLACING POLYUREA PAVEMENT MARKING MATERIAL.


**B-4814 FINAL PAVEMENT
MARKING SCHEDULE**

SYMBOL	DESCRIPTION
(FINAL PAVEMENT MARKINGS)	
POLYUREA (4")	
VA	WHITE EDGELINE
VI	YELLOW BOUBLE CENTER
(MARKERS)	
PERMANENET RAISED PAVEMENT MARKERS	
MA	YELLOW & YELLOW

PLAN PREPARED BY: N.C.D.O.T. SIGNING AND DELINEATION UNIT

Ayman I. Alqudwah, P.E. SIGNING & DELINEATION REGIONAL ENGINEER

Barry Nowlin SIGNING & DELINEATION PROJECT DESIGN TECHNICIAN

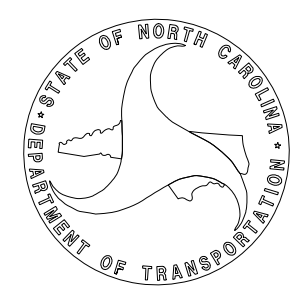


INDEX

SHEET NO.	DESCRIPTION
PMP-1	PAVEMENT MARKING PLAN TITLE AND SCHEDULE SHEET
PMP-2	PAVEMENT MARKING DETAIL



BEGIN MARKING PROJECT R-3825B
 -L- STA. 11+50
 TIE TO EXISTING

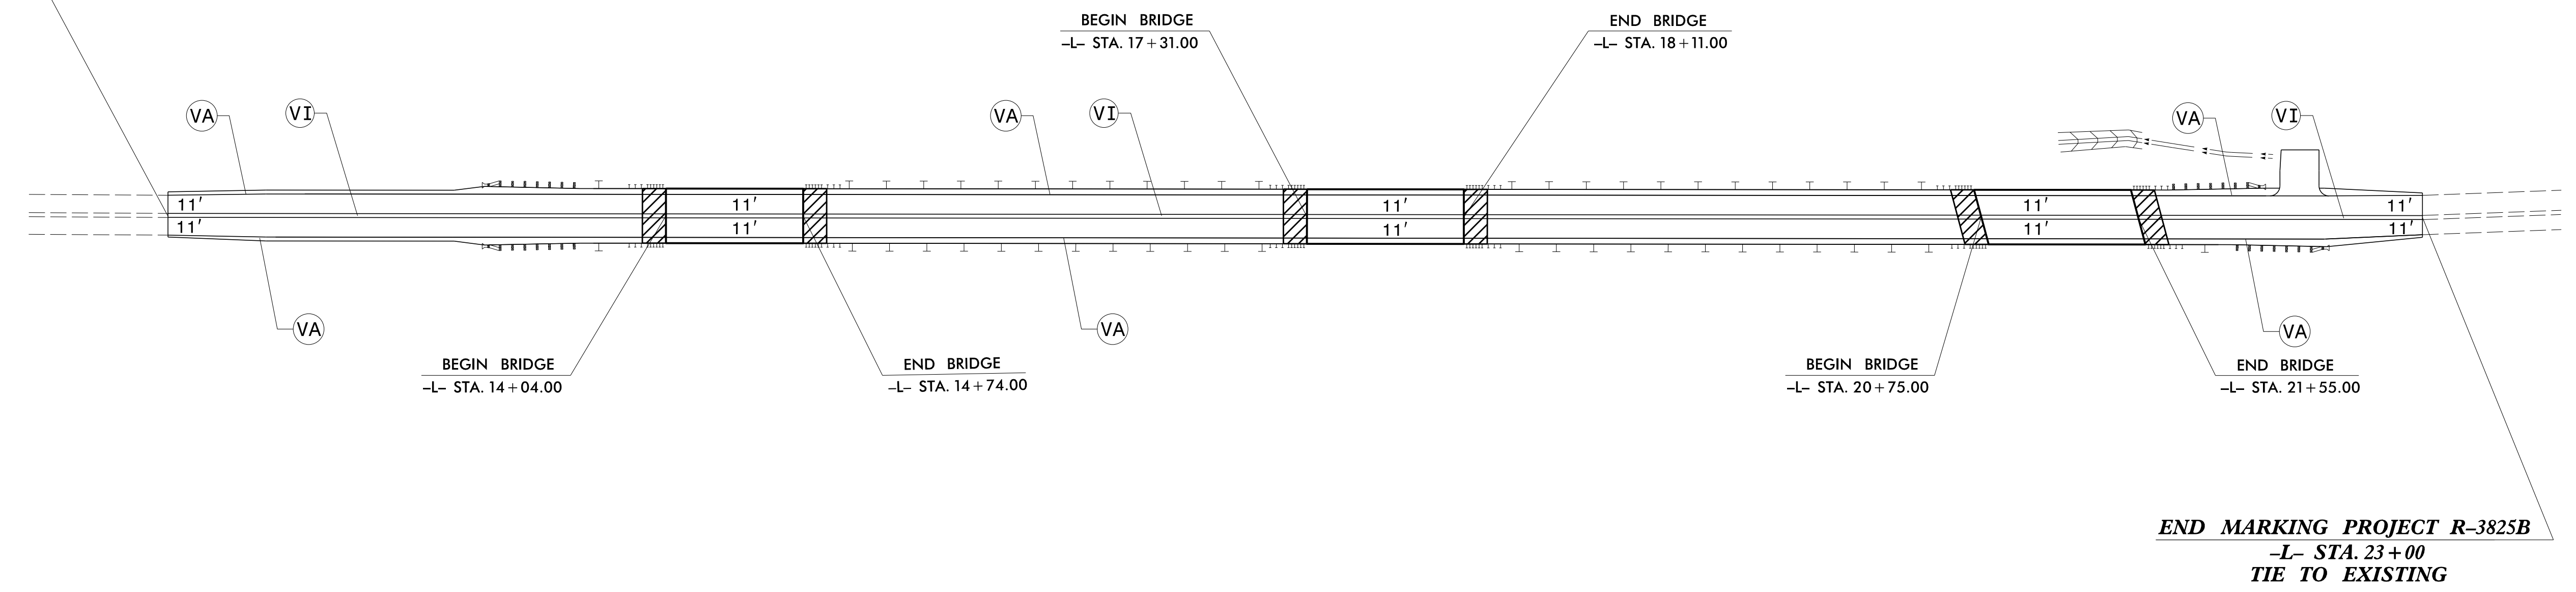

END MARKING PROJECT R-3825B
 -L- STA. 23+00
 TIE TO EXISTING

PROJECT NOTES

- POLYUREA (4")
- VA - WHITE EDGELINE
 - VI - YELLOW BOUBLE CENTER

PAVEMENT MARKING DETAIL

8/9/2016
 P:\IP\Projects-B\B4814\Traffic\Signing\CADD\PM\B-4814_Sgn_PMP_2.dgn
 User:brashid