
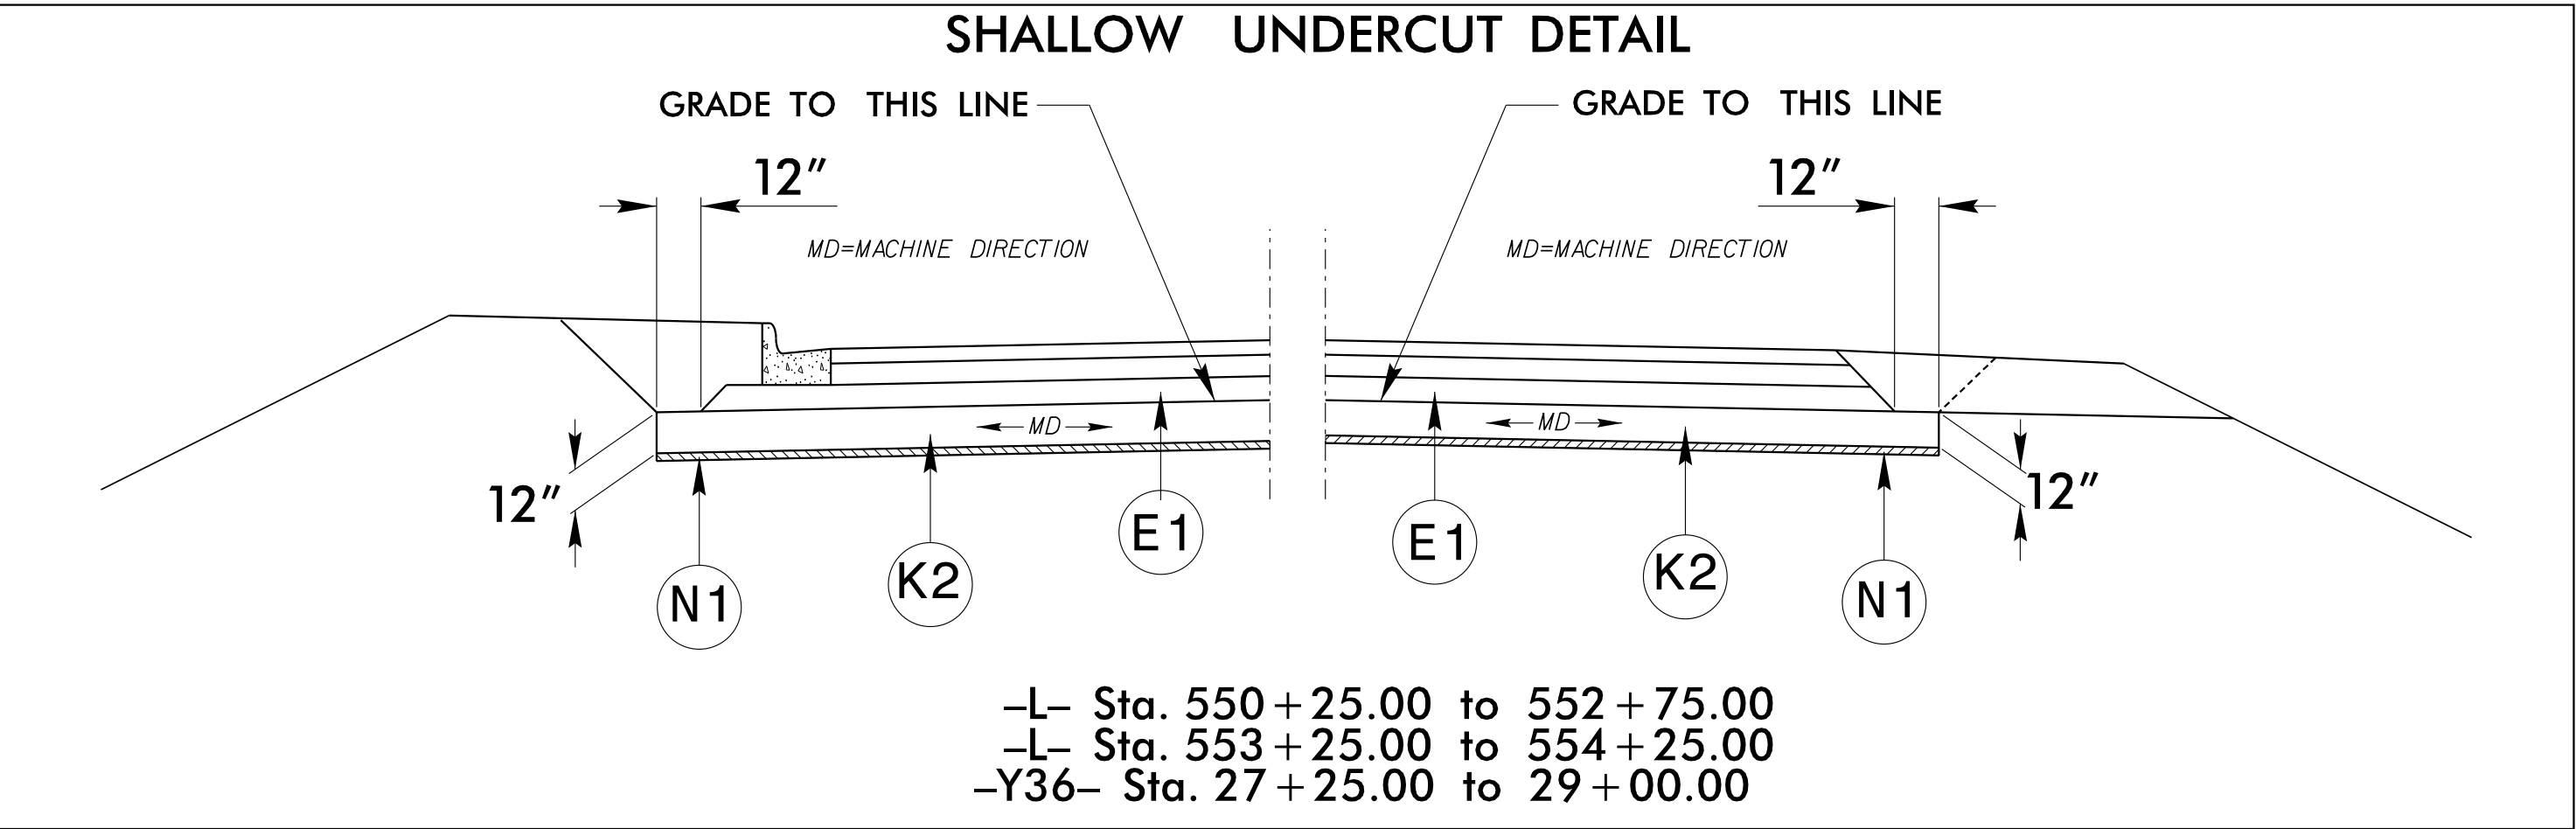


F I N A L P A V E M E N T S C H E D U L E			
C1	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS PER SQ. YARD IN EACH OF TWO LAYERS.	N1	GEOTEXTILE FOR SUBGRADE STABILIZATION
C2	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YARD PER 1" DEPTH TO BE PLACED IN LAYERS NOT TO EXCEED 2" IN DEPTH.	R2	2'-6" CURB AND GUTTER
D1	PROP. APPROX. 4.0" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 456 LBS PER SQ. YARD.	R3	EXPRESSWAY GUTTER
D2	PROP. VAR. DEPTH ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YARD PER 1" DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 2.5" IN DEPTH OR GREATER THAN 4.0" IN DEPTH.	R4	8" X 12" CONCRETE CURB
E1	PROP. APPROX. 5.5" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 627 LBS PER SQ. YARD.	T	EARTH MATERIAL
E2	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YARD PER 1" DEPTH TO BE PLACED IN LAYERS NOT GREATER THAN 5.5" IN DEPTH OR LESS THAN 3.0" IN DEPTH.	U	EXISTING PAVEMENT
R1	1'-6" CURB AND GUTTER	V1	MILLING BITUMINOUS PAVEMENT. 1.5" DEPTH
K1	PROP. 8" CLASS IV SUBGRADE STABILIZATION.	V2	MILLING BITUMINOUS PAVEMENT. 0" TO 1.5" DEPTH (INCIDENTAL MILLING)
K2	PROP. 12" CLASS IV SUBGRADE STABILIZATION.	W	VARIABLE DEPTH ASPHALT PAVEMENT (SEE STD WEDGING DETAIL THIS SHEET)

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

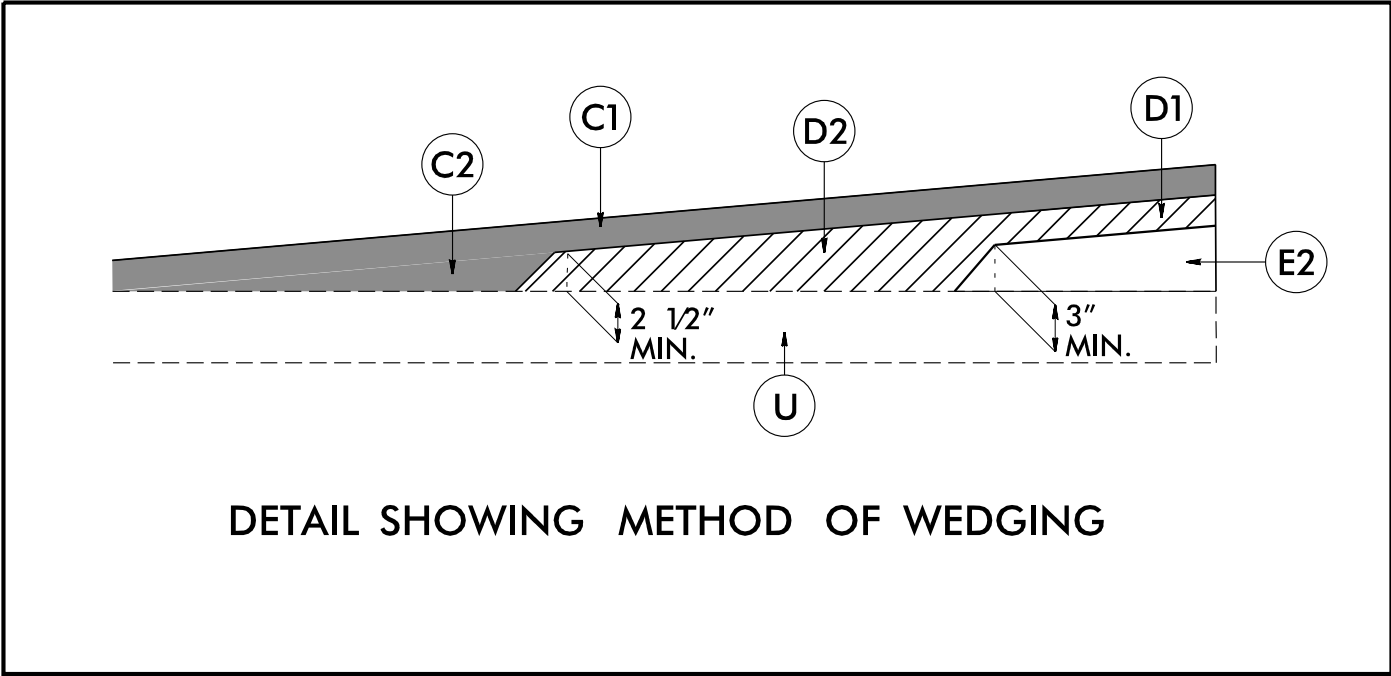

-L- Sta. 550 + 25.00 to 552 + 75.00  
-L- Sta. 553 + 25.00 to 554 + 25.00  
-Y36- Sta. 27 + 25.00 to 29 + 00.00

PROJECT REFERENCE NO.  
U-4700CC

SHEET NO.  
2A-1


ROADWAY DESIGN  
ENGINEER  
9/3/2025 11:28:35 AM PDT  
NORTH CAROLINA  
PROFESSIONAL  
SEAL  
26960  
RECE M. SCHULER  
DocuSigned by:  
Reece M. Schuler  
48844994C93804C6

PAVEMENT DESIGN  
ENGINEER  
9/3/2025 11:20:00 AM EDT  
NORTH CAROLINA  
PROFESSIONAL  
SEAL  
049851  
RAMIE A. SHAW  
DocuSigned by:  
Ramie A. Shaw  
C56D6735487E4E4


DOCUMENT NOT CONSIDERED FINAL  
UNLESS ALL SIGNATURES COMPLETED

**JMT**


Johnson, Mirmiran, & Thompson, Inc.  
4700 Falls of Neuse Rd, Suite 100,  
Raleigh, NC, 27609  
License No: C-3097

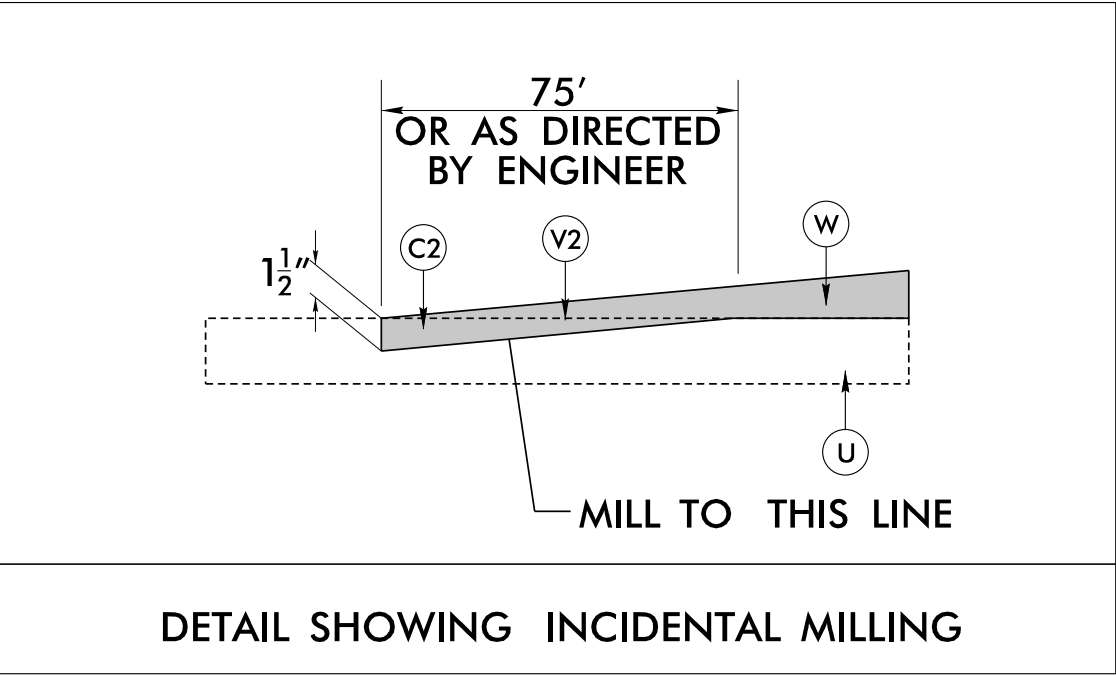

-Y37- Sta. 13 + 75.00 to Sta. 14 + 50.00

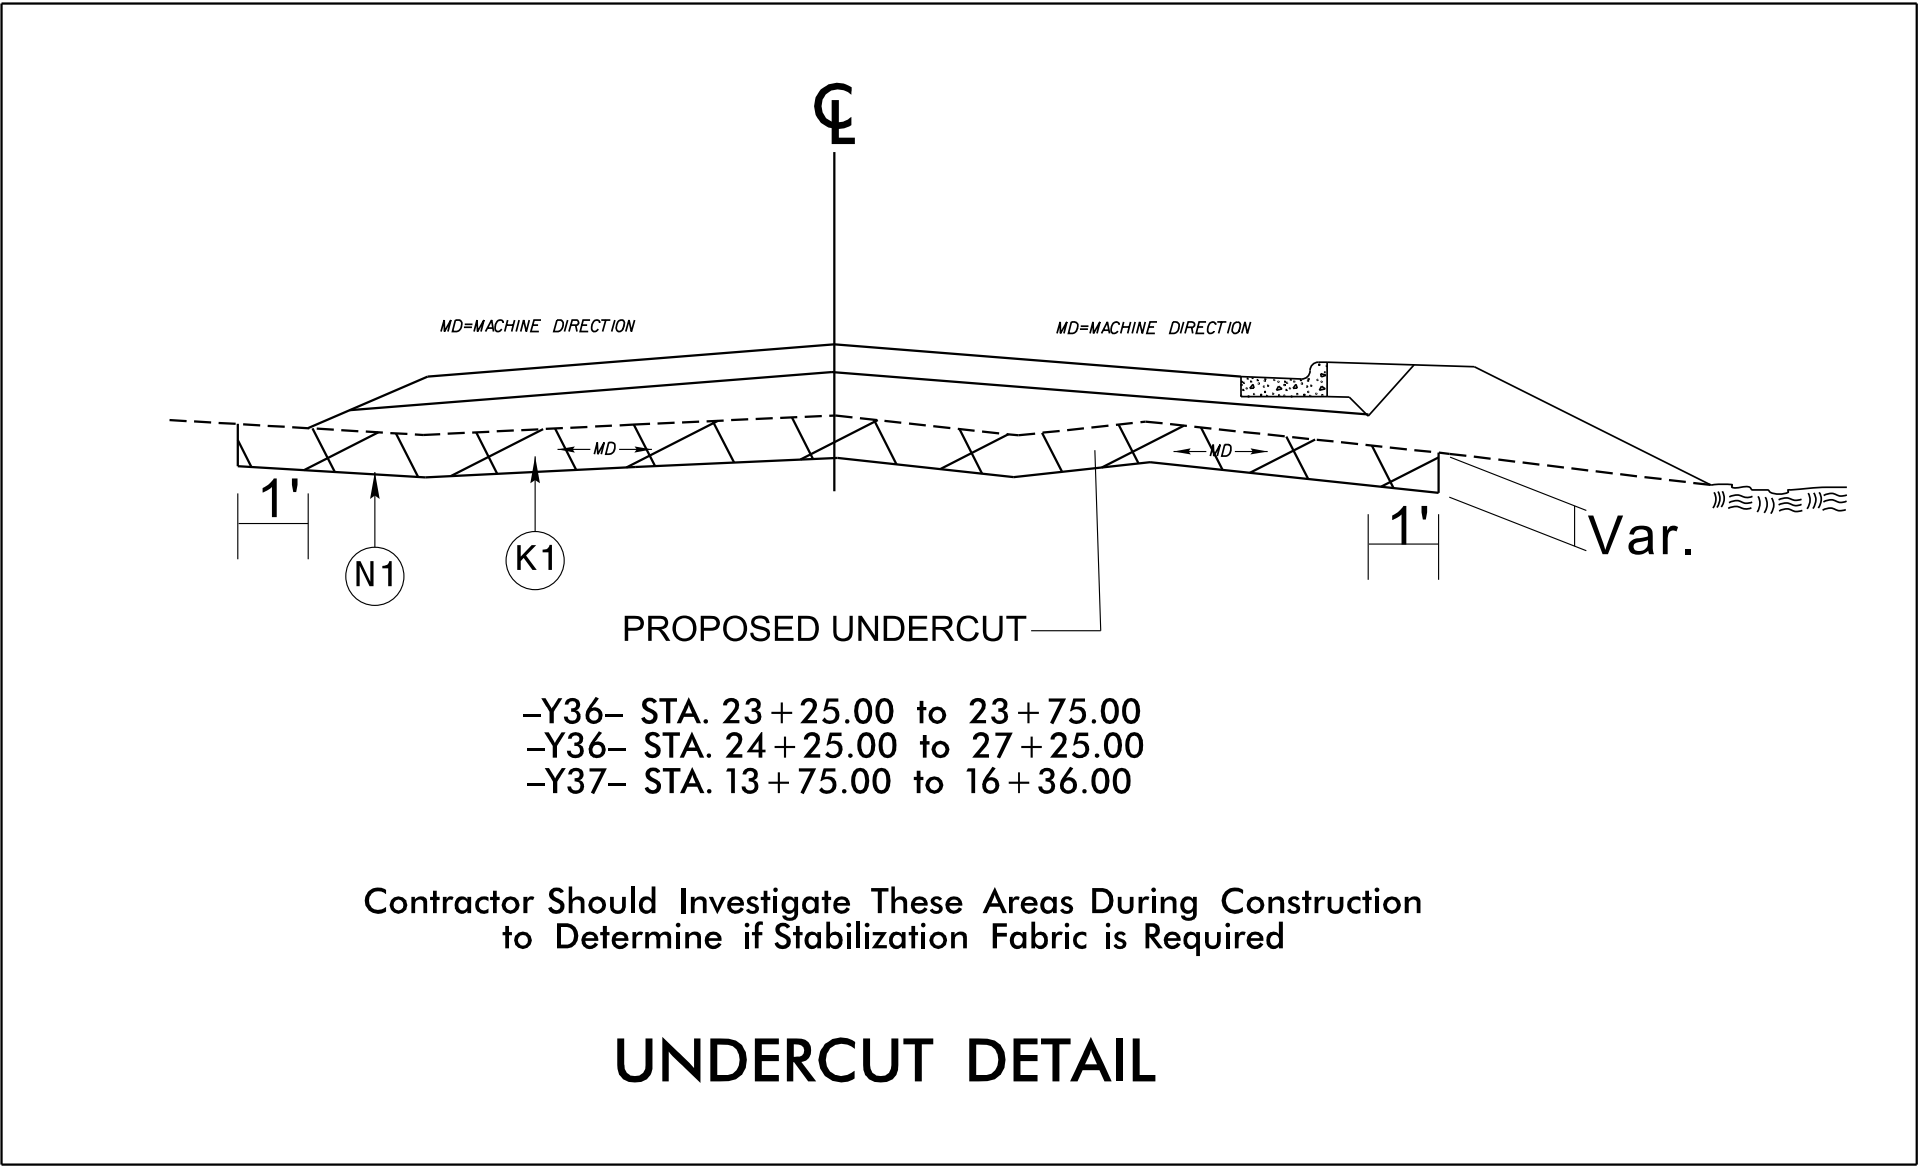

UNDERCUT DETAIL

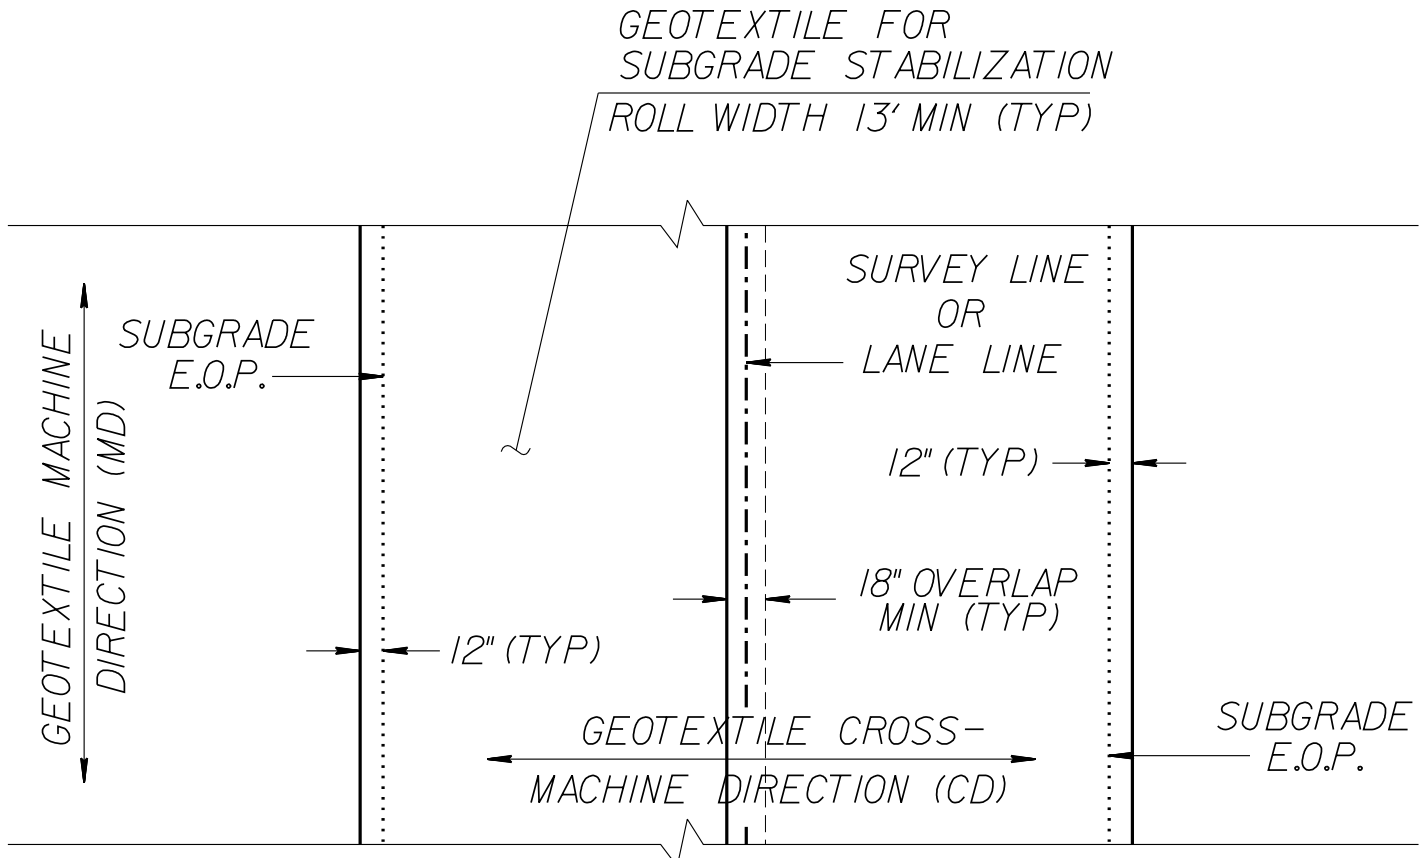

GEOTEXTILE FOR SUBGRADE STABILIZATION PLACEMENT  
(PLAN VIEW)  
(100% COVERAGE REQUIRED)