

ECONOLITE ASC/3-2070 OVERLAP PROGRAMMING DETAIL

(program controller as shown)

1. From Main Menu select 2. CONTROLLER
2. From CONTROLLER Submenu select 2. VEHICLE OVERLAPS

Toggle Twice

OVERLAP C

Select TMG VEH OVLP [C] and 'PPLT FYA'

TMG VEH OVLP...[C] TYPE:PPLT FYA

PROTECTED LEFT TURN.... PHASE 5

OPPOSING THROUGH..... PHASE 6

FLASHING ARROW OUTPUT.....CH11 ISOLATE

DELAY START OF: FYA..0.0 CLEARANCE..0.0

ACTION PLAN SF BIT DISABLE..... 0

END PROGRAMMING

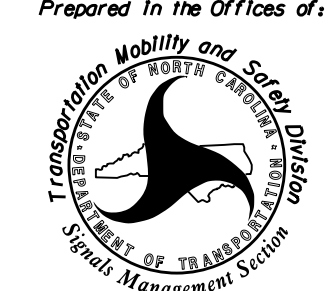
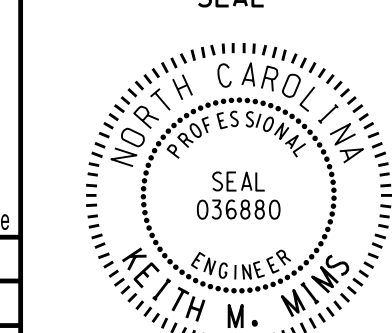
COUNTDOWN PEDESTRIAN SIGNAL OPERATION

Countdown Ped Signals are required to display timing only during Ped Clearance Interval. Consult Ped Signal Module user's manual for instructions on selecting this feature.

THIS ELECTRICAL DETAIL IS FOR
 THE SIGNAL DESIGN: 06-0482
 DESIGNED: March 2016
 SEALED: 10-12-16
 REVISED: N/A

Electrical Detail Sheet 2 of 2

**DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED**

<p>ELECTRICAL AND PROGRAMMING DETAILS FOR:</p> <p style="text-align: center;"><i>Prepared In the Offices of:</i></p> <div style="text-align: center;">  <p>750 N. Greenfield Pkwy, Garner, NC 27529</p> </div>	<p>SR 1403 (Reilly Road) at Kimridge Road/ Willowbrook Road</p> <p>Division 6 Cumberland County Fayetteville</p> <p>PLAN DATE: October 2016 REVIEWED BY:</p> <p>PREPARED BY: James Peterson REVIEWED BY:</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>REVISIONS</th> <th>INIT.</th> <th>DATE</th> </tr> </thead> <tbody> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> </tbody> </table>	REVISIONS	INIT.	DATE										<p>SEAL</p> <div style="text-align: center;">  <p>SEAL 036880 ENGINEER KEITH M. MIMS</p> </div> <p>DocuSigned by: <i>Keith M. Mims</i> 10/17/2016</p> <p>DATE</p> <p>SIG. INVENTORY NO. 06-0482</p>
REVISIONS	INIT.	DATE												

13-0031-2016_07.rds
 S:\IT\ASIS\15_Signal\workgroups\sig_man\jpeterson\060482_sml.ele_xxx.dgn
 jpeterson