

19-AUG-2025, 17:22
D:\w\p\drmp\sig-01-HDR_US_East_01\Documents\NCDOT\Western\01_v_Dn-Coi\1_M\NCDOT_6170_R5600_NC170_US23BUS\6_0_CAD_BIM\6_2_Work\1_n_Progress\R-5600_NCDOT_File_Structure\Trcfrc\Signal\Management\14-0397\140397_2_sml.eia.2024mdd.dgn
K.Jones AT CHA-K.JONES

PED 3 PROGRAMMING DETAIL

Front Panel
Main Menu >Controller >Detector >Ped Det Plans

Web Interface
Home >Controller >Detector Configuration >Pedestrian Detector

Plan 1

Detector	Descripton	Call Phase	Call Overlap
2		2	0
4		4	0
6		6	0
8		3	0

NOTICE PHASE 3 PED
ASSIGNED TO
DETECTOR 8 PED ➡

OUTPUT CHANNEL CONFIGURATION

Front Panel
Main Menu >Controller >More>Channels>Channels Config

Web Interface
Home >Controller >Advanced IO>Channels>Channel Configuration

Channel Configuration

Channel	Control Type	Control Source	Flash Yellow	Flash Red	Flash Alt	MMU Channel
1	Overlap	7		X	X	1
2	Phase Vehicle	2		X		2
3	Phase Vehicle	3		X	X	3
4	Phase Vehicle	4		X		4
5	Phase Vehicle	5		X		5
6	Phase Vehicle	6		X	X	6
7	Overlap	8		X		7
8	Phase Vehicle	8		X	X	8
9	Overlap	1		X	X	9
10	Overlap	2		X	X	10
11	Overlap	3		X		11
12	Overlap	4		X		12
13	Phase Ped	2				13
14	Phase Ped	4				14
15	Phase Ped	6				15
16	Phase Ped	3				16
17	Overlap	5		X	X	17
18	Overlap	6		X		18

NOTICE PHASE 1
ASSIGNED TO OVERLAP 7 ➡

NOTICE PHASE 7
ASSIGNED TO OVERLAP 8 ➡

NOTICE PHASE 3 PED
ASSIGNED TO CHANNEL 16 ➡

↑
NOTICE FLASH RED

MAXTIME STARTUP AND SOFTWARE FLASH PROGRAMMING DETAIL

Front Panel
Main Menu >Controller >Unit

Web Interface
Home >Controller >Unit

Modify parameters as shown below and save changes.

Start Up Parameters

StartUp Clearance Hold
6

Unit Flash Parameters

All Red Flash Exit Time
6

OVERLAP PROGRAMMING

Front Panel
Main Menu >Controller >Overlap >Overlap Parameters/Overlap Timings

Web Interface
Home >Controller >Overlap Configuration >Overlaps

Overlap Plan 1

Overlap	3	4	7	8
Type	FYA 4 - Section	FYA 4 - Section	Normal	Normal
Included Phases	6	5	1,4	4
Modifier Phases	5	4	-	-
Modifier Overlaps	-	-	-	-
Trail Green	0	0	0	0
Trail Yellow	0.0	0.0	0.0	0.0
Trail Red	0.0	0.0	0.0	0.0

FLASHER CIRCUIT MODIFICATION DETAIL

IN ORDER TO INSURE THAT SIGNALS FLASH CONCURRENTLY ON THE SAME APPROACH, MAKE THE FOLLOWING FLASHER CIRCUIT CHANGES:

1. ON REAR OF PDA - REMOVE WIRE FROM TERM. T2-4 AND TERMINATE ON T2-2.
2. ON REAR OF PDA - REMOVE WIRE FROM TERM. T2-5 AND TERMINATE ON T2-3.
3. REMOVE FLASHER UNIT 2.


THE CHANGES LISTED ABOVE TIES ALL PHASES AND OVERLAPS TO FLASHER UNIT 1.

COUNTDOWN PEDESTRIAN SIGNAL OPERATION

Countdown Ped Signals are required to display timing only during Ped Clearance Interval. Consult Ped Signal Module user's manual for instructions on selecting this feature.

THIS ELECTRICAL DETAIL IS FOR
THE SIGNAL DESIGN: 14-0397
DESIGNED: Aug 2025
SEALED: 8/26/2025
REVISED: N/A


Electrical Detail - Sheet 2 of 2

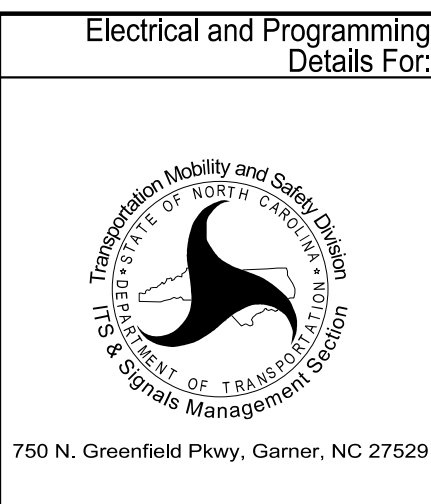

Electrical and Programming Details For:		US 23 Bus./NC 107 (E. Main Street) at US 23 Bus. (Asheville Hwy)/SR 1355 (Sunrise Park)	
Division 14	Jackson County	Sylva	
PLAN DATE:	August 2025	REVIEWED BY:	ZM Esposito
PREPARED BY:	DJ White	REVIEWED BY:	BN Groome
REVISIONS		INIT.	DATE

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

SEAL

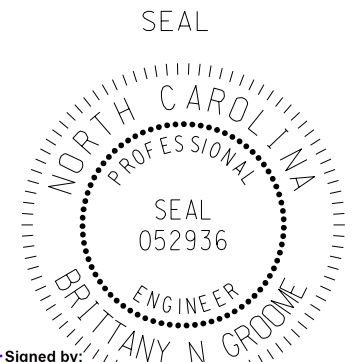

Signed by: Brittany Groome 8/26/2025
1E59340E10B484...

SIG. INVENTORY NO. 14-0397