



A1 13" PORTLAND CEMENT CONCRETE PAVEMENT, THROUGH LAMES (JOINTED WITH DOWELS) A2 13" PORTLAND CEMENT CONCRETE PAVEMENT, MISCELLANEOUS (JOINTED WITH DOWELS) C1 PROP. APPROX. 1.25" ASPHALT CONCRETE SURFACE COURSE, TYPE SS.5B, AT AN AVERAGE RATE OF 187.5 LBS. PER SO. YD. C2 PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE SS.5C, AT AN AVERAGE RATE OF 168 LBS. PER SO. YD. IN EACH OF TWO C3 PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE SS.5C, AT AN AVERAGE RATE OF 168 LBS. PER SO. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS ONT TO EXCEED 2" IN DEPTH. C5 PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE SS.5C, AT AN AVERAGE RATE OF 165 LBS. PER SO. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS OF 165 LBS. PER SO. YD. D1 PROP. APPROX. 4" ASPHALT CONCRETE SURFACE COURSE, TYPE SS.5B, AT AN AVERAGE RATE OF 165 LBS. PER SO. YD. E1 PROP. APPROX. 7.25" ASPHALT CONCRETE BASE COURSE, TYPE SS.5C, AT AN AVERAGE RATE OF 413.25 LBS. PER SO. YD. IN EACH OF TWO LAYERS. E2 PROP. APPROX. 7.25" ASPHALT CONCRETE BASE COURSE, TYPE BSS.CC, AT AN AVERAGE RATE OF 413.25 LBS. PER SO. YD. IN EACH OF TWO LAYERS. E2 PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE BSS.CC, AT AN AVERAGE RATE OF 413.25 LBS. PER SO. YD. IN EACH OF TWO LAYERS. E3 PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE BSS.CC, AT AN AVERAGE RATE OF 456 LBS. PER SO. YD. K PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE BSS.CC, AT AN AVERAGE RATE OF 456 LBS. PER SO. YD. K PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE BSS.CC, AT AN AVERAGE RATE OF 570 LBS. PER SO. YD. K PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE BSS.CC, AT AN AVERAGE RATE OF 570 LBS. PER SO. YD. K PROP. APPROX. 5" ASPHALT CONCRETE BASE COURSE, TYPE BSS.CC, AT AN AVERAGE RATE OF 570 LBS. PER SO. YD. K PROP. 12" ADDREDAL ENDORSE BASE COURSE, TYPE BSS.CC, AT AN AVERAGE RATE OF 570 LBS. PER SO. YD. K PROP. 12" ADDREDAL ENDORSE BASE COURSE, TYPE BSS.CC, AT AN AVERAGE RATE OF 570 LBS. PER SO. YD. C PROP. APPROX. 5" ASPHALT CONCRETE BASE COURSE, TYPE B	PAVEMENT SCHEDULE		
A2 13" PORTLAND CEMENT CONCRETE PAVEMENT, MISCELLANEOUS C1 13" PORTLAND CEMENT CONCRETE PAVEMENT, MISCELLANEOUS C1 PROP. APPROX. 1.25" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 137.5 LBS. PER SQ. YD. C2 PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS. C3 PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. PER 1" DEPTH. TO AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT TO EXCEDE 2" IN DEPTH. C5 PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD. D1 PROP. APPROX. 4" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD. E1 PROP. APPROX. 7.25" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. IN EACH OF TWO LAYERS. E2 PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 5½" IN DEPTH. STORED THAN 5½" IN DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN SY" AND AVERAGE RATE OF 465 LBS. PER SQ. YD. E4 PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 466 LBS. PER SQ. YD. K PROP. 12" AGGREGATE SUBGRADE (AS DIRECTED BY THE ENGINEER) R1 CONCRETE SHOULDER BERN GUTTER R2 41" SINGLE FACED PRECAST REINFORCED CONC. BARRIER T EARTH MATERIAL. U EXISTING PAVEMENT.	Δ1	13" PORTLAND CEMENT CONCRETE PAVEMENT, THROUGH LANES	
C1 PROP. APPROX. 1.25" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 137.5 LBS. PER SQ. YD. C2 PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS. C3 PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. C4 PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT TO EXCEED 2" IN DEPTH. C5 PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD. D1 PROP. APPROX. 4" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD. E1 PROP. APPROX. 7.25" ASPHALT CONCRETE BASE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 413.25 LBS. PER SQ. YD. IN EACH OF TWO LAYERS. E2 PROP. APPROX. 7.25" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 51½" IN DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 51½" IN DEPTH. E3 PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD. E4 PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD. K PROP. 12" AGGREGATE SUBGRADE (AS DIRECTED BY THE ENGINEER) K PROP. 12" AGGREGATE SUBGRADE (AS DIRECTED BY THE ENGINEER) R2 41" SINGLE FACED PRECAST REINFORCED CONC. BARRIER T EARTH MATERIAL. U EXISTING PAVEMENT.		(JOINTED WITH DOWELS)	
C1 AT AN AVERAGE RATE OF 137.5 LBS. PER SQ. YD. C2 PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 188 LBS. PER SQ. YD. IN EACH OF TWO LAYERS. C3 PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 188 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT TO EXCEED 2" IN DEPTH. TO BE PLACED IN LAYERS NOT TO EXCEED 2" IN DEPTH. TO PROP. APPROX. 4" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD. C5 PROP. APPROX. 4" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD. C6 PROP. APPROX. 4" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 413.2S LBS. PER SQ. YD. IN EACH OF TWO LAYERS. E1 PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 413.2S LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 5½" IN DEPTH. E3 PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD. E4 PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 570 LBS. PER SQ. YD. K PROP. 12" AGGREGATE SUBGRADE (AS DIRECTED BY THE ENGINEER) K PROP. 12" AGGREGATE SUBGRADE (AS DIRECTED BY THE ENGINEER) R1 CONCRETE SHOULDER BERN GUTTER R2 41" SINGLE FACED PRECAST REINFORCED CONC. BARRIER T EARTH MATERIAL. U EXISTING PAVEMENT.	A2	13" PORTLAND CEMENT CONCRETE PAVEMENT, MISCELLANEOUS (JOINTED WITHOUT DOWELS)	
C2 AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS. C3 PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT TO EXCEED 2" IN DEPTH. TO BE PLACED IN LAYERS NOT TO EXCEED 2" IN DEPTH. TO BE PLACED IN LAYERS NOT TO EXCEED 2" IN DEPTH. C5 PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD. D1 PROP. APPROX. 4" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE 19.0C, AT AN AVERAGE RATE OF 413.25 LBS. PER SQ. YD. IN EACH OF TWO LAYERS. E1 PROP. APPROX. 7.25" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 413.25 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 5½" IN DEPTH. E3 PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 5½" IN DEPTH. E4 PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD. K PROP. 12" AGGREGATE SUBGRADE (AS DIRECTED BY THE ENGINEER) R1 CONCRETE SHOULDER BERM GUTTER R2 41" SINGLE FACED PRECAST REINFORCED CONC. BARRIER T EARTH MATERIAL. U EXISTING PAVEMENT.	C1	PROP. APPROX. 1.25" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 137.5 LBS. PER SQ. YD.	
C3 AT AN AVERAGE RATE OF 168 LBS. PER SO. YD. C4 PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 112 LBS. PER SO. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT TO EXCEED 2" IN DEPTH. C5 PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SO. YD. D1 PROP. APPROX. 4" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 413.25 LBS. PER SO. YD. E1 PROP. APPROX. 7.25" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 413.25 LBS. PER SO. YD. IN EACH OF TWO LAYERS. E2 PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 114 LBS. PER SO. YD. PER 1" DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER E3 PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SO. YD. E4 PROP. APPROX. 5" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 570 LBS. PER SO. YD. K PROP. 12" AGGREGATE SUBGRADE (AS DIRECTED BY THE ENGINEER) R1 CONCRETE SHOULDER BERM GUTTER R2 41" SINGLE FACED PRECAST REINFORCED CONC. BARRIER T EARTH MATERIAL. U EXISTING PAVEMENT.	C2	AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO	
AT AN AVERAGE RATE OF 112 LBS. PER SO. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT TO EXCEED 2" IN DEPTH. C5 PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD. D1 PROP. APPROX. 4" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD. E1 PROP. APPROX. 7.25" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 413.25 LBS. PER SQ. YD. IN EACH OF TWO LAYERS. PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 5½" IN DEPTH. E3 PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD. E4 PROP. APPROX. 5" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 570 LBS. PER SQ. YD. K PROP. 12" AGGREGATE SUBGRADE (AS DIRECTED BY THE ENGINEER) R1 CONCRETE SHOULDER BERM GUTTER R2 41" SINGLE FACED PRECAST REINFORCED CONC. BARRIER T EARTH MATERIAL. U EXISTING PAVEMENT.	СЗ	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.	
D1 PROP. APPROX. 4" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE 119.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD. E1 PROP. APPROX. 7.25" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 413.25 LBS. PER SQ. YD. IN EACH OF TWO LAYERS. PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 5½" IN DEPTH. E3 PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD. E4 PROP. APPROX. 5" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 570 LBS. PER SQ. YD. K PROP. 12" AGGREGATE SUBGRADE (AS DIRECTED BY THE ENGINEER) R1 CONCRETE SHOULDER BERM GUTTER R2 41" SINGLE FACED PRECAST REINFORCED CONC. BARRIER T EARTH MATERIAL. U EXISTING PAVEMENT.	C4	AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH. TO	
TYPE 119.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD. PROP. APPROX. 7.25" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 413.25 LBS. PER SQ. YD. IN EACH OF TWO LAYERS. PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 5½" IN DEPTH. E3 PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD. E4 PROP. APPROX. 5" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 570 LBS. PER SQ. YD. K PROP. 12" AGGREGATE SUBGRADE (AS DIRECTED BY THE ENGINEER) R1 CONCRETE SHOULDER BERM GUTTER R2 41" SINGLE FACED PRECAST REINFORCED CONC. BARRIER T EARTH MATERIAL. U EXISTING PAVEMENT.	C5		
AT AN AVERAGE RATE OF 413.25 LBS. PER SQ. YD. IN EACH OF TWO LAYERS. PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 5½" IN DEPTH. E3 PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD. E4 PROP. APPROX. 5" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 570 LBS. PER SQ. YD. K PROP. 12" AGGREGATE SUBGRADE (AS DIRECTED BY THE ENGINEER) R1 CONCRETE SHOULDER BERM GUTTER R2 41" SINGLE FACED PRECAST REINFORCED CONC. BARRIER T EARTH MATERIAL. U EXISTING PAVEMENT.	D1	·	
AT AN AVERAGE RATE OF 114 LBS. PER SO. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 5½" IN DEPTH. E3 PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD. E4 PROP. APPROX. 5" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 570 LBS. PER SQ. YD. K PROP. 12" AGGREGATE SUBGRADE (AS DIRECTED BY THE ENGINEER) R1 CONCRETE SHOULDER BERM GUTTER R2 41" SINGLE FACED PRECAST REINFORCED CONC. BARRIER T EARTH MATERIAL. U EXISTING PAVEMENT.	E1	AT AN AVERAGE RATE OF 413.25 LBS. PER SQ. YD. IN EACH OF TWO	
E3 AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD. E4 PROP. APPROX. 5" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 570 LBS. PER SQ. YD. K PROP. 12" AGGREGATE SUBGRADE (AS DIRECTED BY THE ENGINEER) R1 CONCRETE SHOULDER BERM GUTTER R2 41" SINGLE FACED PRECAST REINFORCED CONC. BARRIER T EARTH MATERIAL. U EXISTING PAVEMENT.	E2	AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER	
K PROP. 12" AGGREGATE SUBGRADE (AS DIRECTED BY THE ENGINEER) R1 CONCRETE SHOULDER BERM GUTTER R2 41" SINGLE FACED PRECAST REINFORCED CONC. BARRIER T EARTH MATERIAL. U EXISTING PAVEMENT.	E3		
R1 CONCRETE SHOULDER BERM GUTTER R2 41" SINGLE FACED PRECAST REINFORCED CONC. BARRIER T EARTH MATERIAL. U EXISTING PAVEMENT.	E4	PROP. APPROX. 5" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 570 LBS. PER SQ. YD.	
R2 41" SINGLE FACED PRECAST REINFORCED CONC. BARRIER T EARTH MATERIAL. U EXISTING PAVEMENT.	K	PROP. 12" AGGREGATE SUBGRADE (AS DIRECTED BY THE ENGINEER)	
T EARTH MATERIAL. U EXISTING PAVEMENT.	R1	CONCRETE SHOULDER BERM GUTTER	
U EXISTING PAVEMENT.	R2	41" SINGLE FACED PRECAST REINFORCED CONC. BARRIER	
	Т	EARTH MATERIAL.	
V1 MILLING BITUMINOUS PAVEMENT, 3" DEPTH	U	EXISTING PAVEMENT.	
	V1	MILLING BITUMINOUS PAVEMENT, 3" DEPTH	
V3 MILLING BITUMINOUS PAVEMENT, 1.5" DEPTH	V3	MILLING BITUMINOUS PAVEMENT, 1.5" DEPTH	
V4 MILLED RUMBLE STRIPS (ASPHALT CONCRETE)	V4	MILLED RUMBLE STRIPS (ASPHALT CONCRETE)	
V5 MILLED RUMBLE STRIPS (CONCRETE SHOULDERS)	V5	MILLED RUMBLE STRIPS (CONCRETE SHOULDERS)	
X1 GEOTEXTILE FOR SUBGRADE STABILIZATION	Х1	GEOTEXTILE FOR SUBGRADE STABILIZATION	
X2 NONWOVEN GEOTEXTILE INTERLAYER	X2	NONWOVEN GEOTEXTILE INTERLAYER	
W1 WEDGING (VARIABLE DEPTH ASPHALT PAVEMENT, SEE DETAIL ON THIS SHEET)	W1	WEDGING (VARIABLE DEPTH ASPHALT PAVEMENT, SEE DETAIL ON THIS SHEET)	

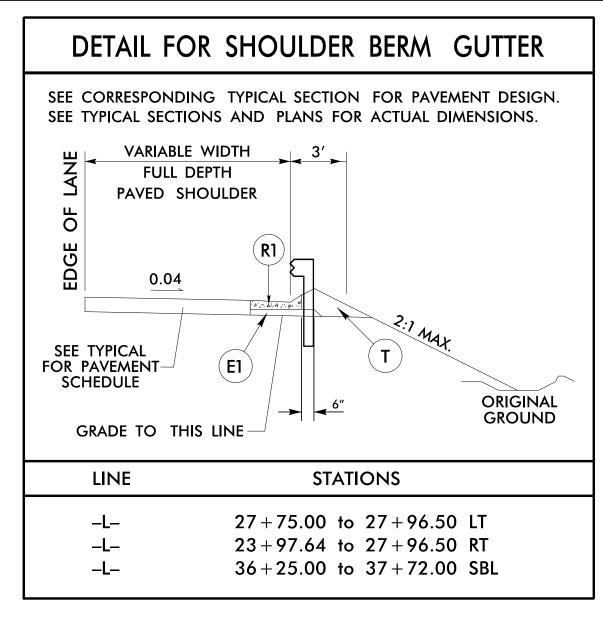

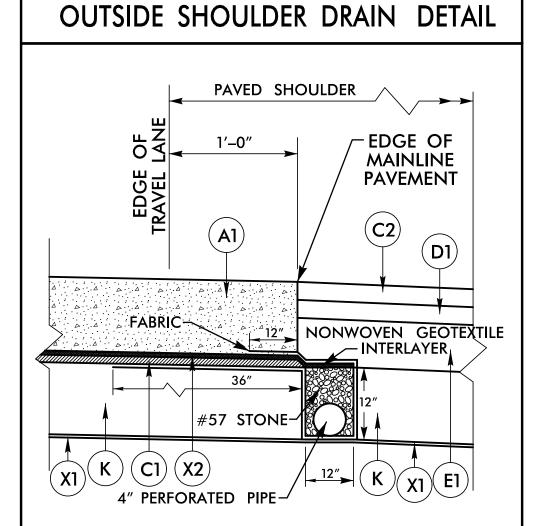


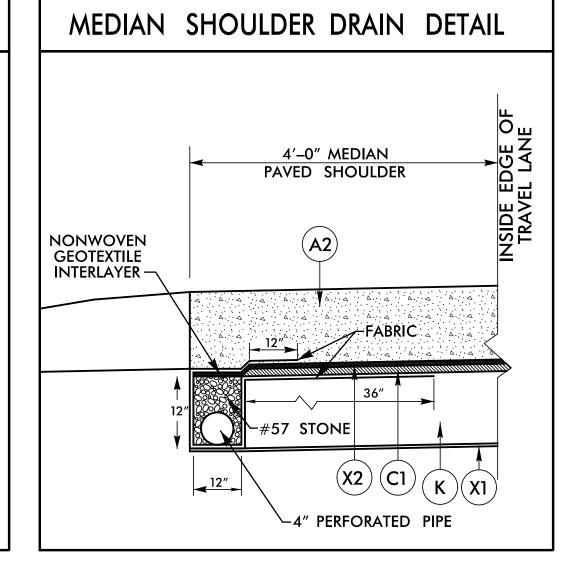


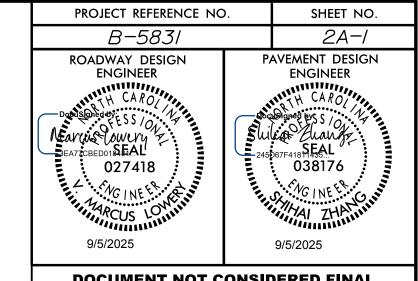

DOCUMENT NOT CONSIDERED FINAL **UNLESS ALL SIGNATURES COMPLETED**

706 HILLSBOROUGH ST. SUITE 200 RALEIGH, NC 27603 PH (919) 773-8887 CORP. LICENSE NO.: C-0275

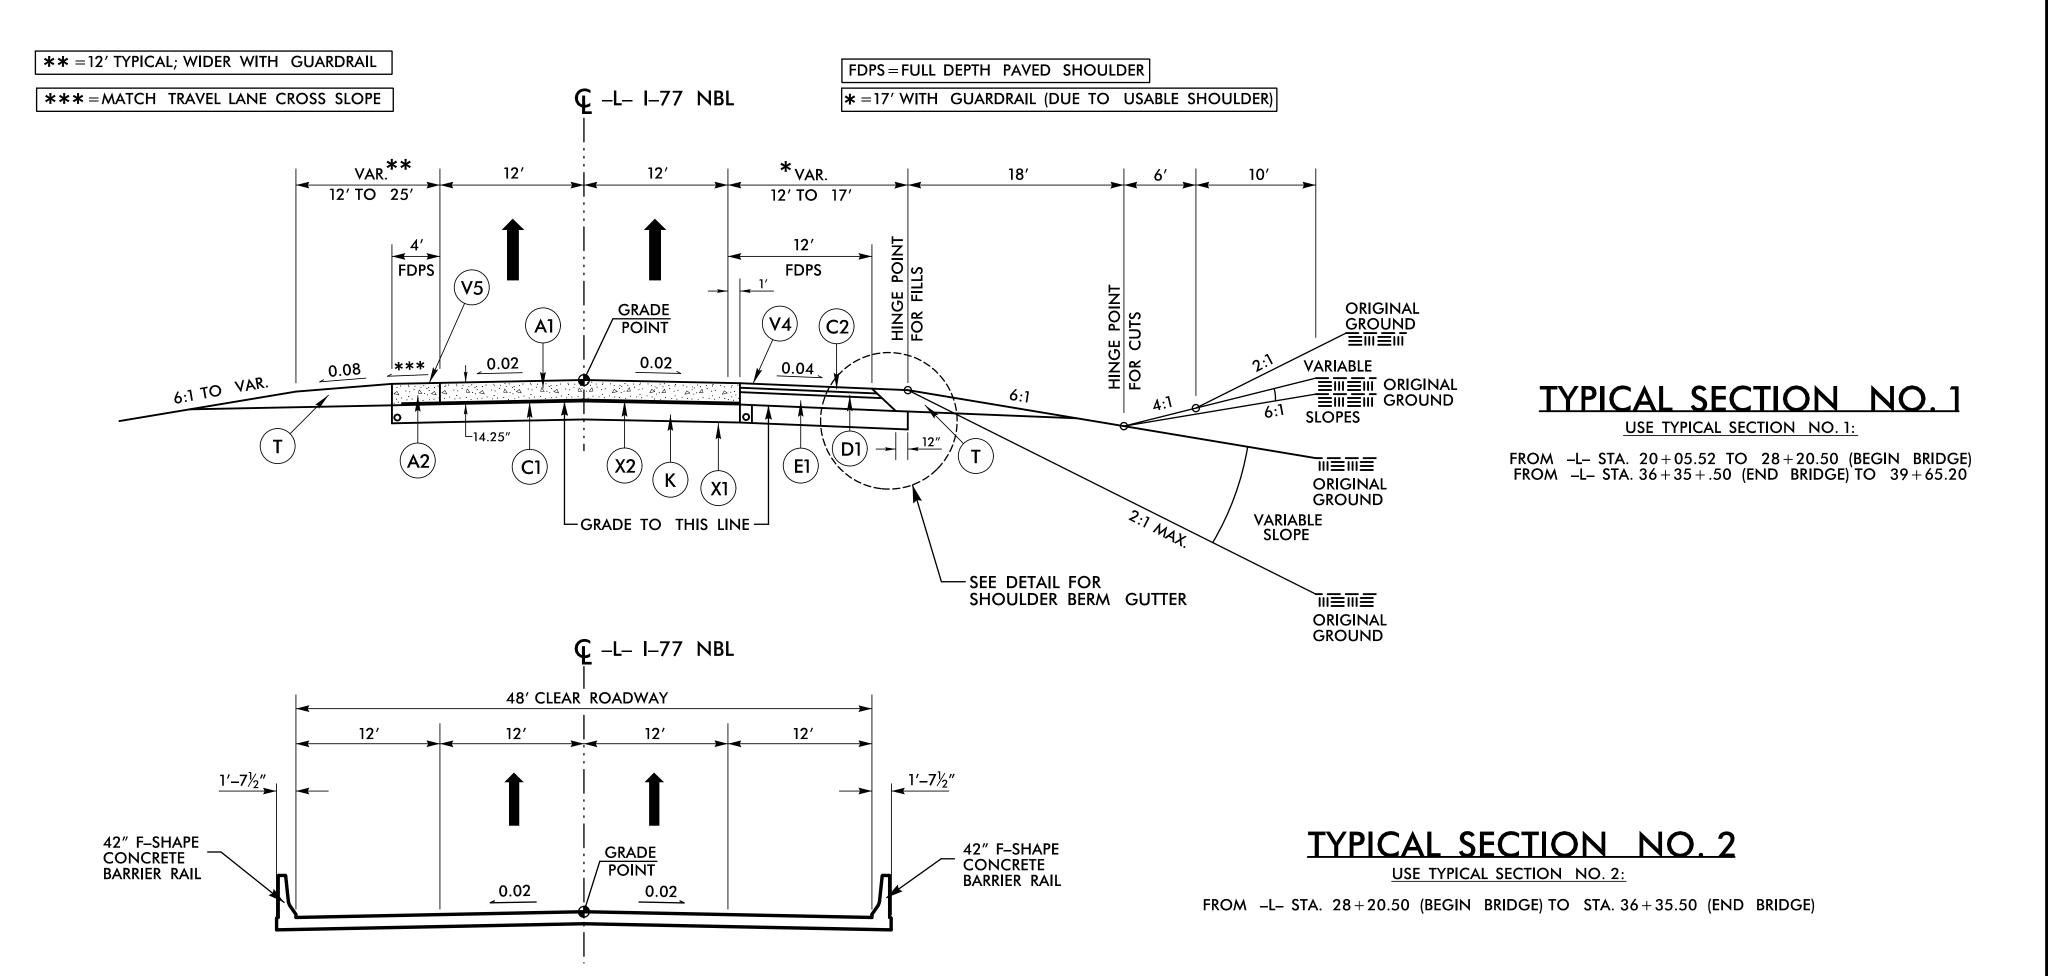

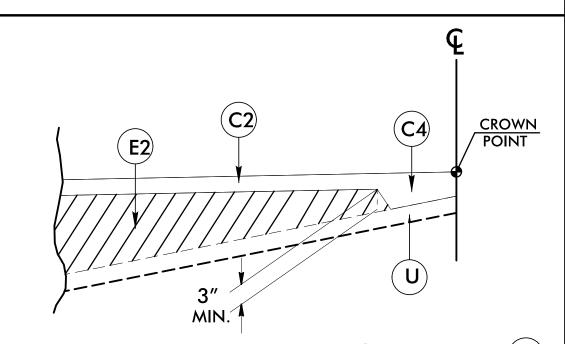

Detail Showing Method of Wedging Wi