

ECONOLITE ASC/3-2070 OVERLAP PROGRAMMING DETAIL

(program controller as shown)

1. From Main Menu select 2. CONTROLLER
2. From CONTROLLER Submenu select 2. VEHICLE OVERLAPS

OVERLAP A

Select TMG VEH OVLP [A] and 'PPLT FYA'

TMG VEH OVLP...[A] TYPE:PPLT FYA

PROTECTED PHASE (LEFT TURN)..... 1

PERMISSIVE PHASE (OPPOSING THRU)... 2

FLASHING ARROW OUTPUT.....CH9 ISOLATE

DELAY START OF: FYA..0.0 CLEARANCE..0.0

ACTION PLAN SF BIT DISABLE..... 0

Toggle Twice

OVERLAP C

Select TMG VEH OVLP [C] and 'PPLT FYA'

TMG VEH OVLP...[C] TYPE:PPLT FYA

PROTECTED PHASE (LEFT TURN)..... 5

PERMISSIVE PHASE (OPPOSING THRU)... 6

FLASHING ARROW OUTPUT.....CH11 ISOLATE

DELAY START OF: FYA..0.0 CLEARANCE..0.0

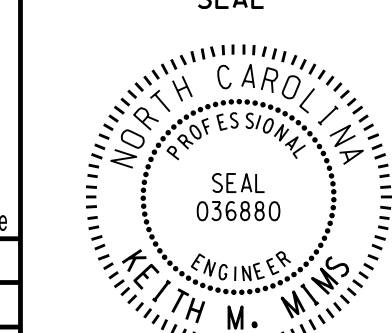

ACTION PLAN SF BIT DISABLE..... 0

END PROGRAMMING

THIS ELECTRICAL DETAIL IS FOR
 THE SIGNAL DESIGN: 06-1237
 DESIGNED: June 2016
 SEALED: 7-26-16
 REVISED: N/A

Electrical Detail Sheet 2 of 2

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

ELECTRICAL AND PROGRAMMING DETAILS FOR:	SR 1408 (Bonanza Drive) at Super Compare Foods / Morganton Rd Elementary School Division 6 Cumberland County Fayetteville	SEAL 
Prepared In the Offices of:  750 N. Greenfield Pkwy, Garner, NC 27529	PLAN DATE: July 2016 REVIEWED BY: DTJ PREPARED BY: James Peterson REVIEWED BY:	DocuSigned by: Keith M. Mims 8/4/2016 2F8078E8EC03445 DATE
REVISIONS INIT. DATE		SIG. INVENTORY NO. 06-1237

27-JUL-2016 10:54
 C:\TCS\ASST\TCS\Sigma\work\kg\oups\51g_Mom\ Peterson\061237_sml.ele.xxx.dgn
 J. Peterson