


EDI MODEL 2018EClip-NC CONFLICT MONITOR PROGRAMMING DETAIL

(remove jumpers and set switches as shown)

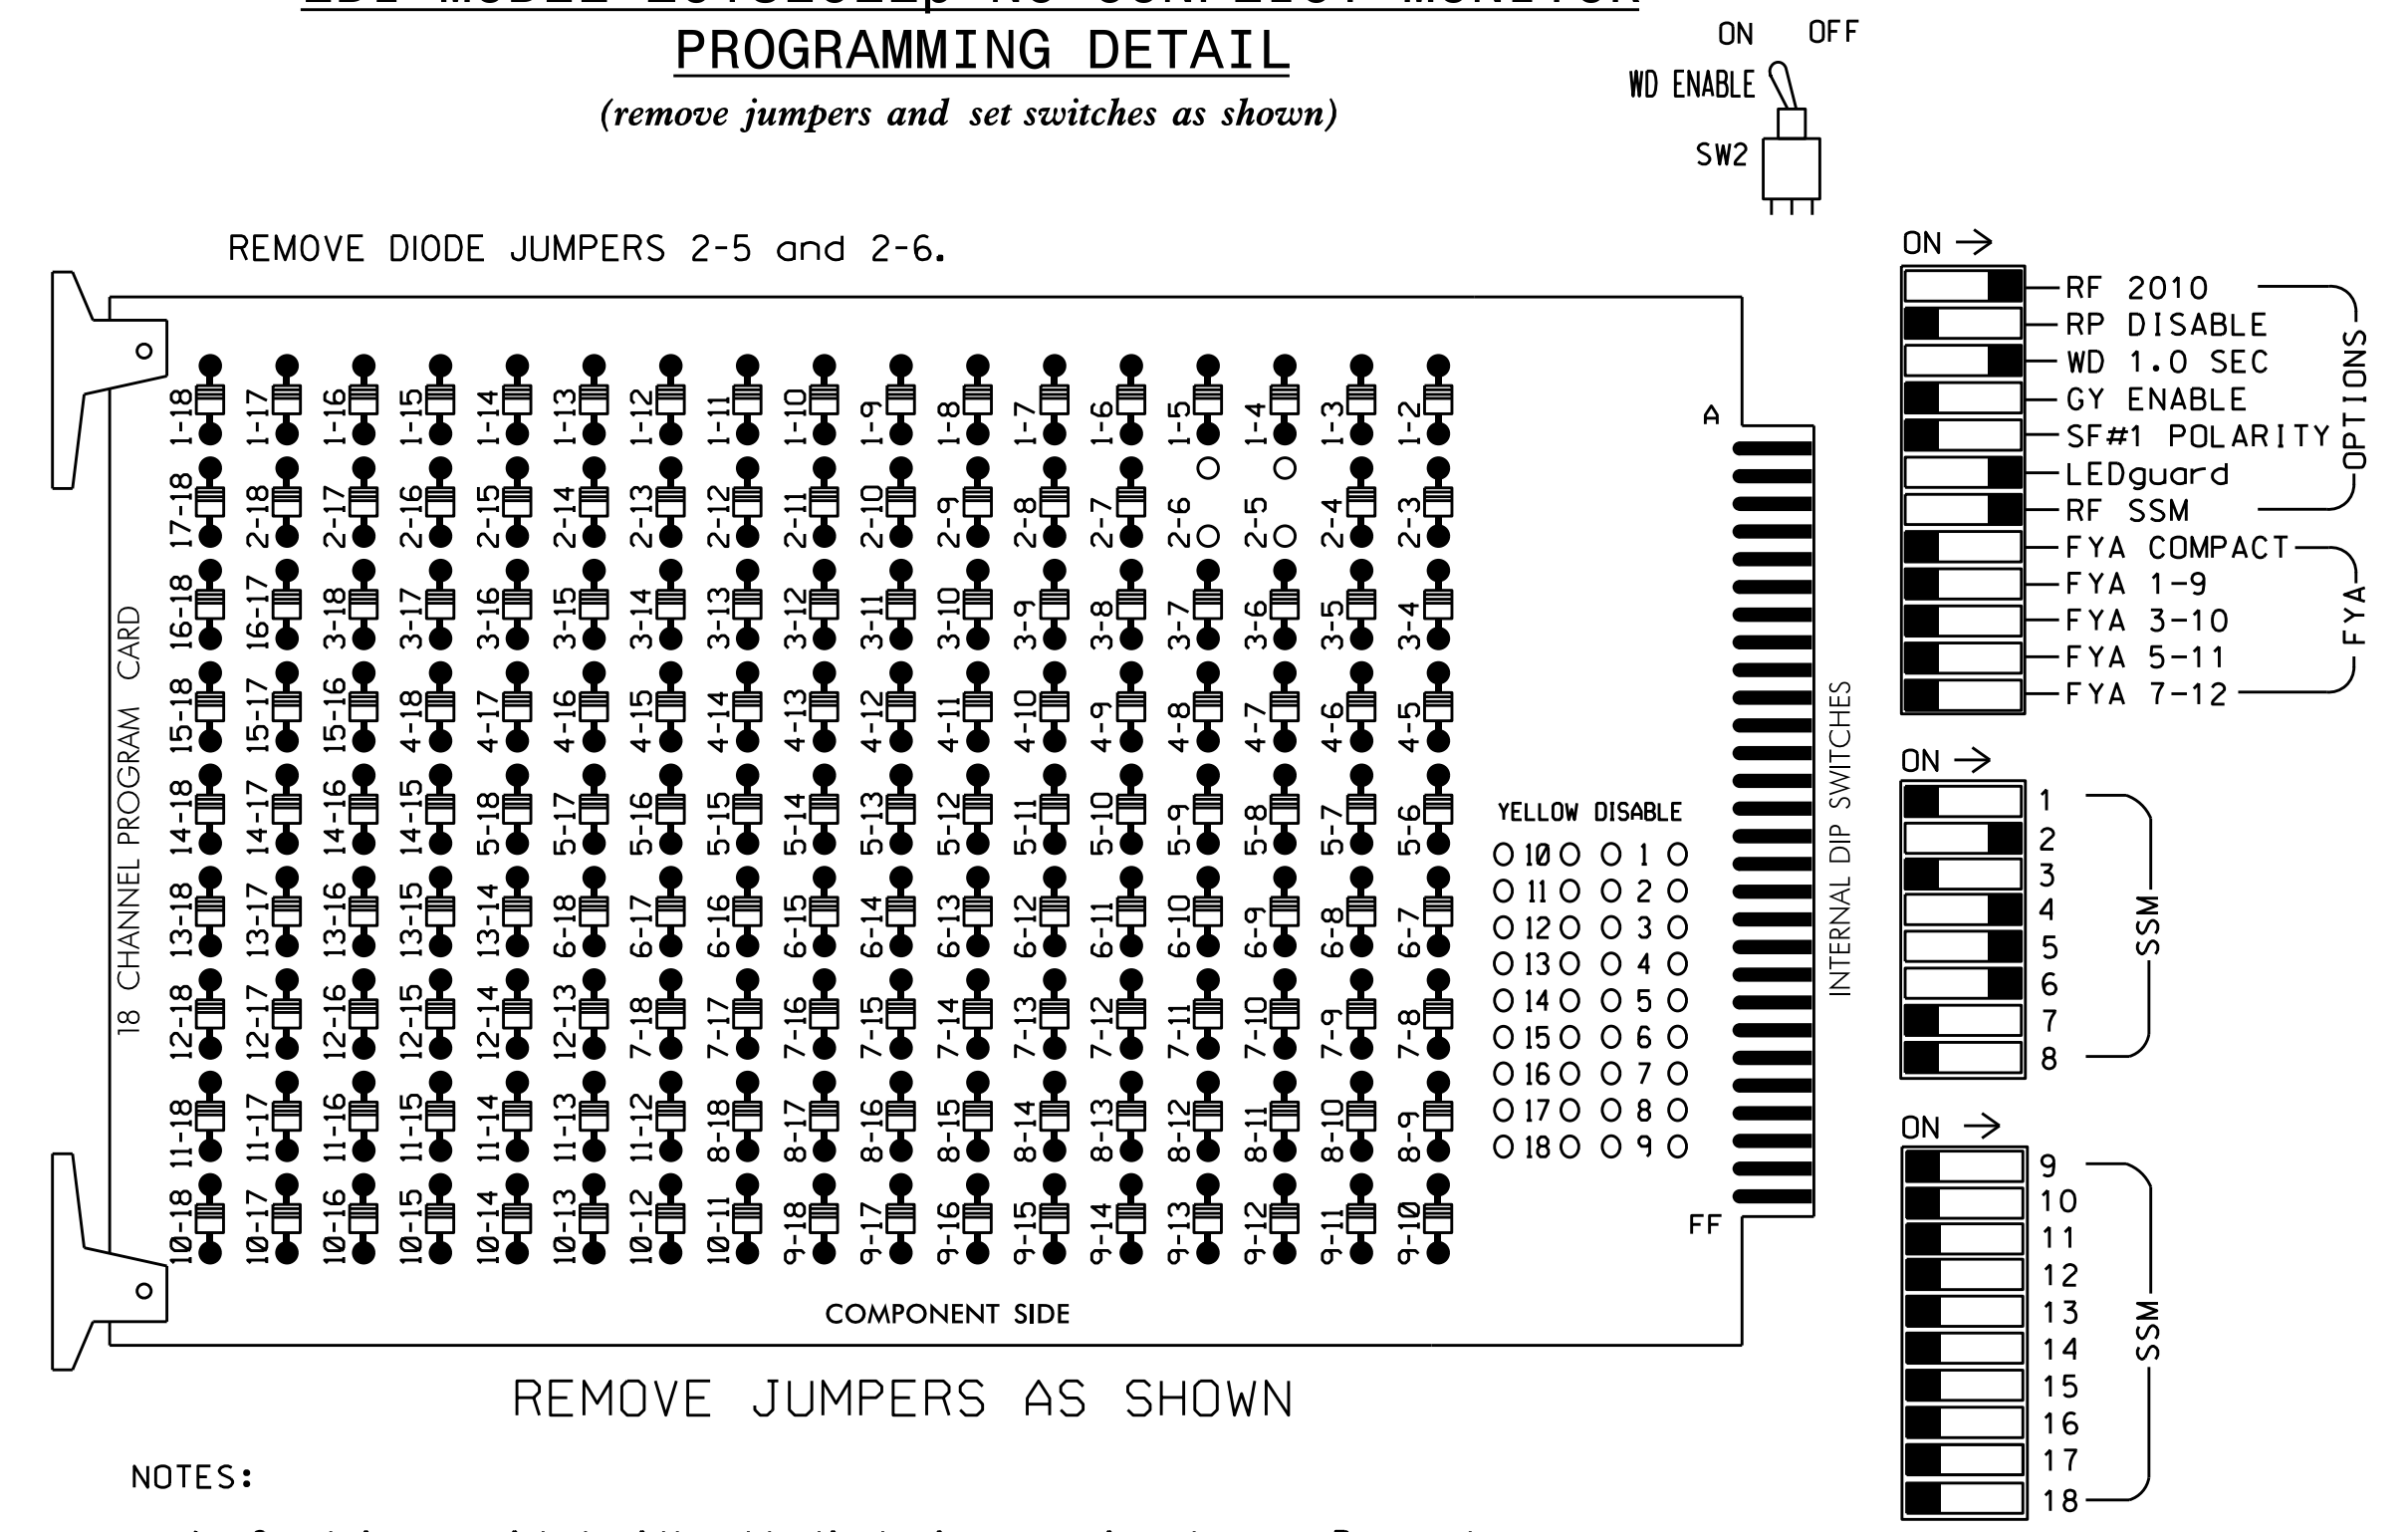

NOTES:

1. Card is provided with all diode jumpers in place. Removal of any jumper allows its channels to run concurrently.
2. Ensure jumpers SEL2-SEL5 and SEL9 are present on the monitor board.
3. Ensure that Red Enable is active at all times during normal operation.
4. Integrate monitor with Ethernet network in cabinet.

NOTES

1. To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the Signal Plans.
2. Enable Simultaneous Gap-Out for all phases.
3. Program phases 2 and 6 for volume density operation.
4. Program controller to start up in phase 2 Green and 6 Green.
5. The cabinet and controller are part of the Fayetteville Signal System.

SIGNAL HEAD HOOK-UP CHART


LOAD SWITCH NO.	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12
CMU CHANNEL NO.	1	2	13	3	4	14	5	6	15	7	8	16
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED
SIGNAL HEAD NO.	NU	21,22	NU	NU	41,42	NU	51,52	61,62	NU	NU	NU	NU
RED		128			101			134				
YELLOW		129			102			135				
GREEN		130			103			136				
RED ARROW								131				
YELLOW ARROW								132				
GREEN ARROW								133				

NU = Not Used

EQUIPMENT INFORMATION

CONTROLLER.....2070E
 CABINET.....332
 SOFTWARE.....ECONOLITE ASC/3-2070
 CABINET MOUNT.....BASE
 OUTPUT FILE POSITIONS...12
 LOAD SWITCHES USED.....S2,S5,S7,S8
 PHASES USED.....2,4,5,6
 OVERLAPS.....NONE

INPUT FILE POSITION LAYOUT (front view)

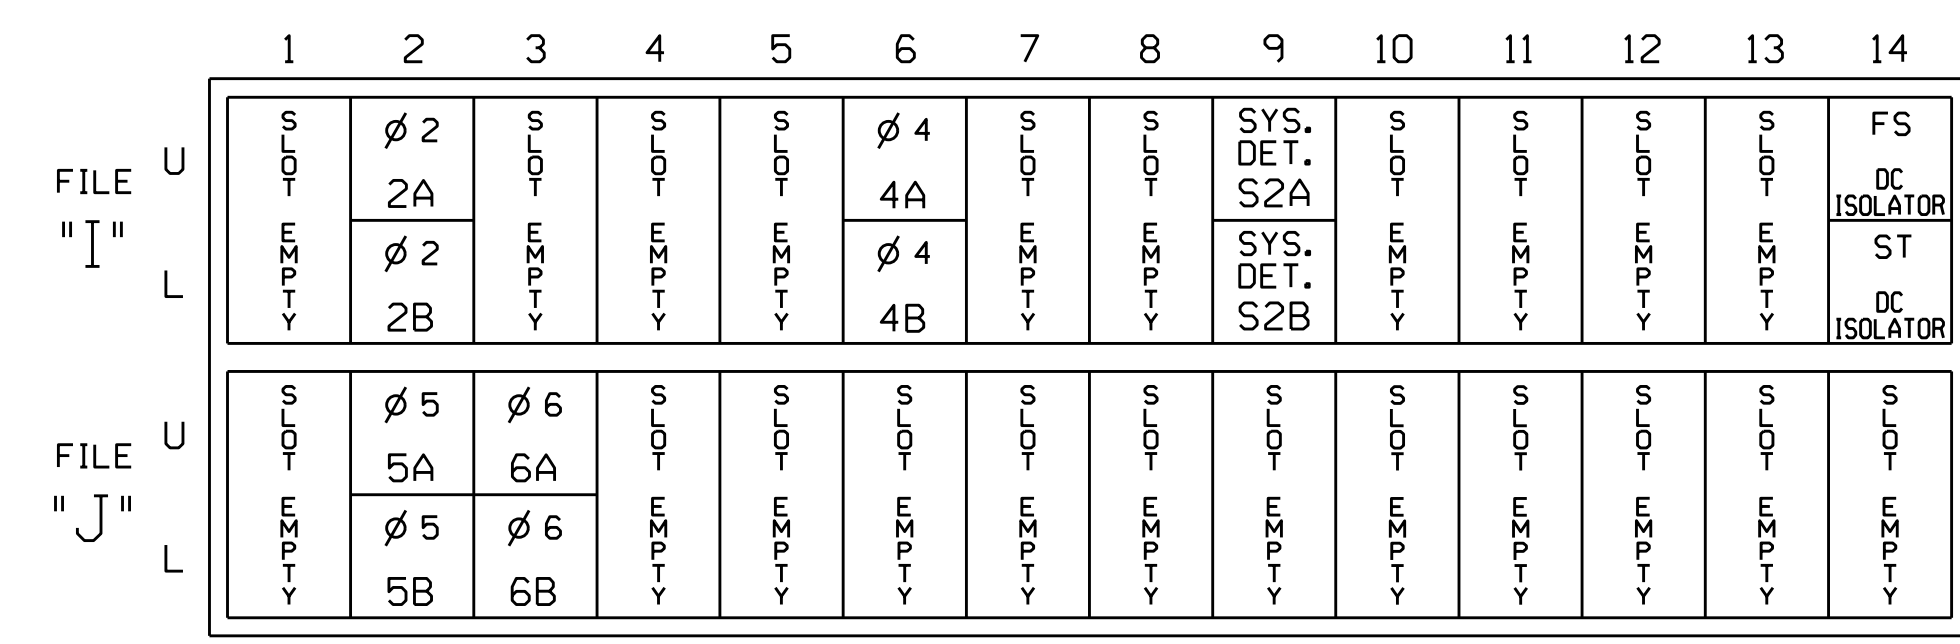

EX.: 1A, 2A, ETC. = LOOP NO.'S


FS = FLASH SENSE
 ST = STOP TIME

INPUT FILE CONNECTION & PROGRAMMING CHART

LOOP NO.	LOOP TERMINAL	INPUT FILE POS.	PIN NO.	DETECTOR NO.	NEMA PHASE	CALL	EXTEND TIME	DELAY TIME	DETECTOR TYPE
2A	TB2-5,6	I2U	39	2	2	YES	1.7		N
2B	TB2-7,8	I2L	43	12	2	YES	1.7		N
4A	TB4-9,10	I6U	41	4	4	YES			S
4B	TB4-11,12	I6L	45	14	4	YES		10	S
5A	TB3-5,6	J2U	40	6	5	YES		3	S
5B	TB3-7,8	J2L	44	16	5	YES			S
6A	TB3-9,10	J3U	64	36	6	YES			N
6B	TB3-11,12	J3L	77	46	6	YES			N
*S2A	TB6-9,10	I9U	60	11	SYS	NO			N
*S2B	TB6-11,12	I9L	62	13	SYS	NO			N

* System detector only. Remove any assigned vehicle phase.

INPUT FILE POSITION LEGEND: J2L

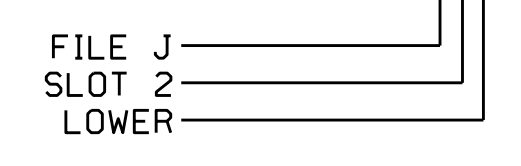

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 06-1182
 DESIGNED: October 2015
 SEALED: 4/15/2016
 REVISED:

Electrical Detail

Electrical and Programming Details for: SR 1400 Cliffdale Road at SR 1007 (All American Freeway) Northbound Ramps

Division 6 Cumberland County Fayetteville

PLAN DATE: April 2016 REVIEWED BY: BAS

PREPARED BY: C. Strickland REVIEWED BY:

750 N. Greenfield Pkwy, Garner, NC 27529

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

Seal: NORTH CAROLINA PROFESSIONAL ENGINEER SEAL 030530 JACOBARY M. LITTLE

DocuSigned by: *Carlynn M. Little* 5/10/2016

SIG. INVENTORY NO. 06-1182

10-0416-2016 14-55 S:\MT\AS\11\15\Sig\01\work\hgr\oups\51g_Maps\11\15\Sig\01\182_sml_e.xxx.dgn