


EDI MODEL 2018EClip-NC CONFLICT MONITOR
PROGRAMMING DETAIL

(remove jumpers and set switches as shown)

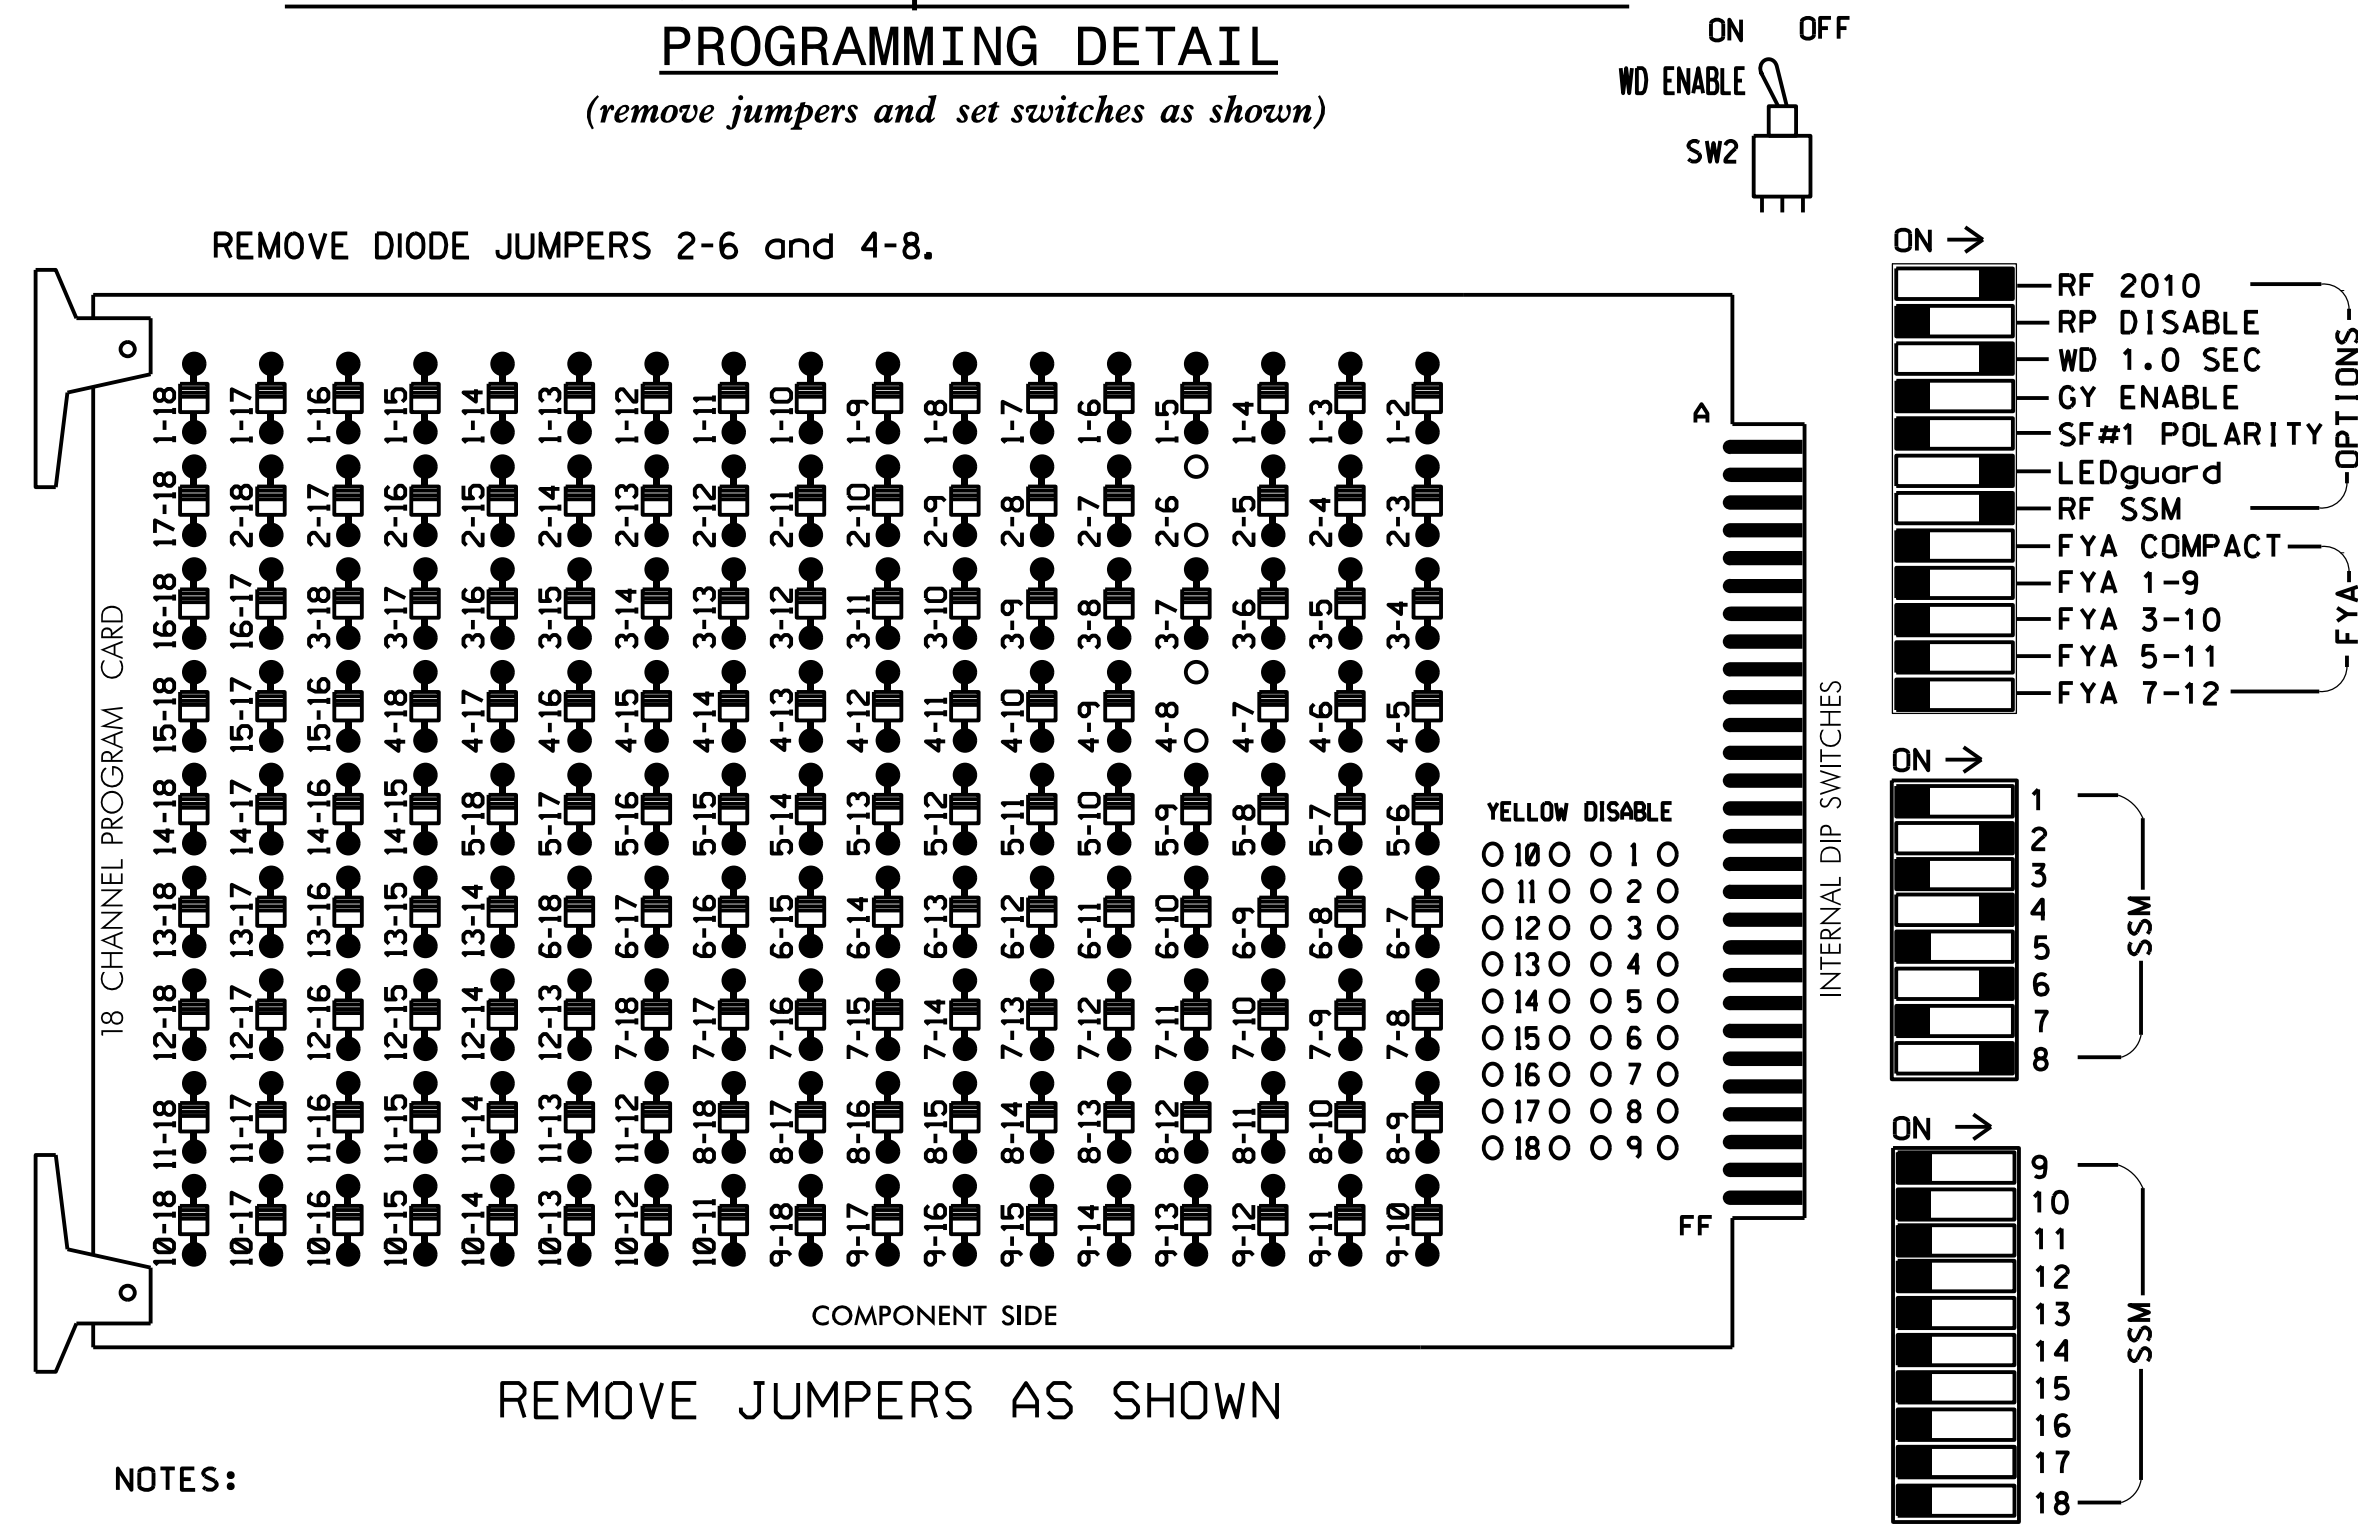

NOTES:

- Card is provided with all diode jumpers in place. Removal of any jumper allows its channels to run concurrently.
- Ensure jumpers SEL2-SEL5 and SEL9 are present on the monitor board.
- Ensure that Red Enable is active at all times during normal operation.
- Integrate monitor with Ethernet network in cabinet.

NOTES

- To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the Signal Plans.
- Program phases 4 and 8 for Dual Entry.
- Enable Simulataneous Gap-Out for all phases.
- Program phases 2 and 6 for Start Up in Green.
- Program phases 2 and 6 for Yellow Flash.
- The cabinet and controller are part of the Fayetteville City System.

SIGNAL HEAD HOOK-UP CHART

LOAD SWITCH NO.	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12
CMU CHANNEL NO.	1	2	13	3	4	14	5	6	15	7	8	16
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED
SIGNAL HEAD NO.	NU	21,22	NU	NU	41,42	NU	NU	61,62	NU	NU	81,82	NU
RED		128			101			134			107	
YELLOW		129			102			135			108	
GREEN		130			103			136			109	
RED ARROW												
YELLOW ARROW												
GREEN ARROW												


NU = Not Used

EQUIPMENT INFORMATION

CONTROLLER.....2070E
 CABINET.....332
 SOFTWARE.....ECONOLITE ASC/3-2070
 CABINET MOUNT.....BASE
 OUTPUT FILE POSITIONS...12
 LOAD SWITCHES USED.....S2,S5,S8,S11
 PHASES USED.....2,4,6,8
 OVERLAPS.....NONE

INPUT FILE POSITION LAYOUT

(front view)

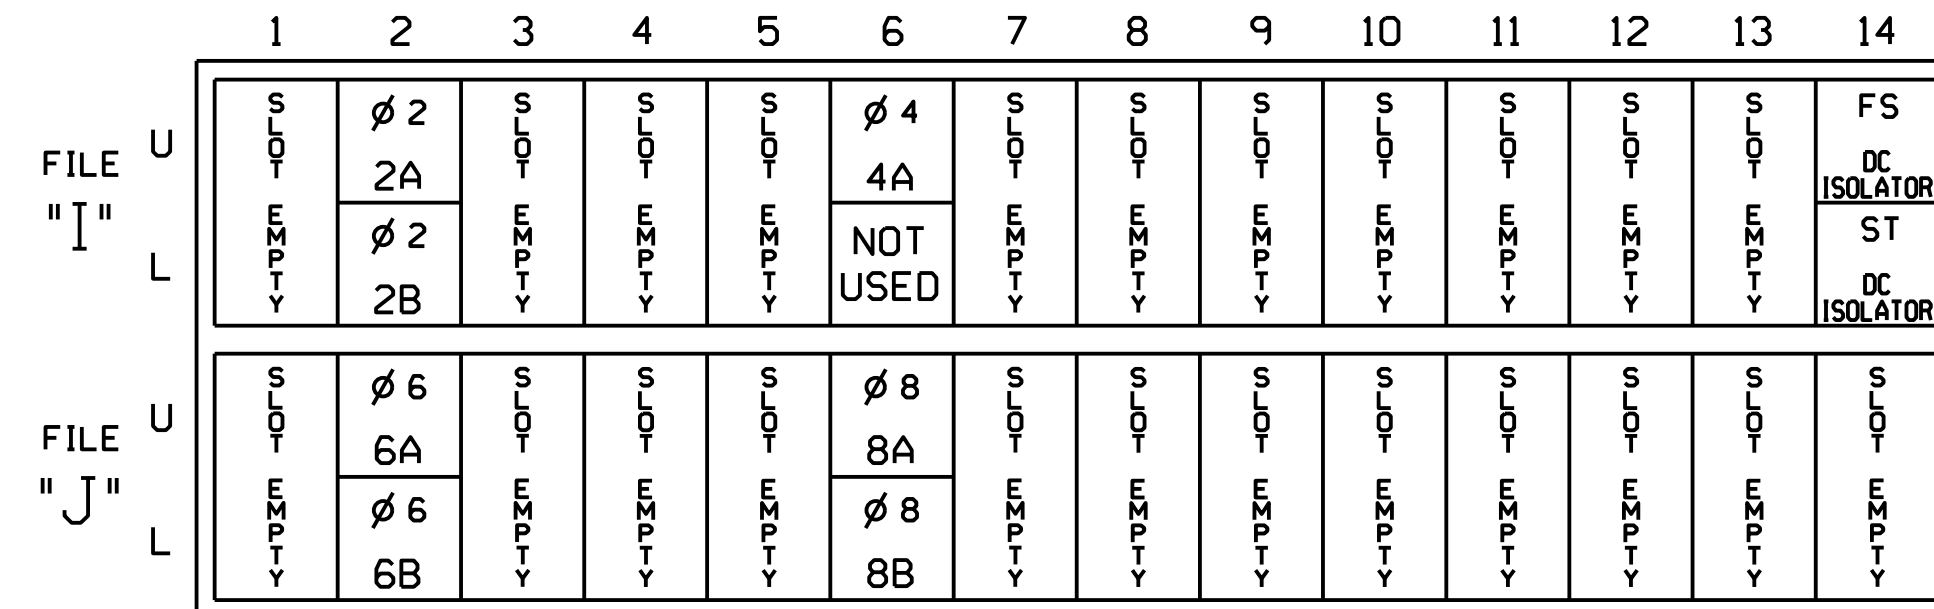


EX.: 1A, 2A, ETC. = LOOP NO.'S

FS = FLASH SENSE
 ST = STOP TIME

INPUT FILE CONNECTION & PROGRAMMING CHART

LOOP NO.	LOOP TERMINAL	INPUT FILE POS.	PIN NO.	DETECTOR NO.	NEMA PHASE	CALL	EXTEND TIME	DELAY TIME	DETECTOR TYPE
2A	TB2-5,6	I2U	39	2	2	YES			S
2B	TB2-7,8	I2L	43	12	2	YES			S
4A	TB4-9,10	I6U	41	4	4	YES			S
6A	TB3-5,6	J2U	40	6	6	YES			S
6B	TB3-7,8	J2L	44	16	6	YES			S
8A	TB5-9,10	J6U	42	8	8	YES			S
8B	TB5-11,12	J6L	46	18	8	YES		10	S

INPUT FILE POSITION LEGEND: J2L



THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: C012
 DESIGNED: NOVEMBER 2016
 SEALED: 11/17/2016
 REVISED:

Electrical Detail

Prepared In the Offices of:

 Hatch Mott MacDonald
 PO Box 700
 Fayetteville, NC 27526
 www.hatchmott.com
 HATCH MOTT MACDONALD & E, LLC
 LICENSE NO. P4669

HILLSBORO STREET
 AT
 BOUNDARY LANE

Seal: NORTH CAROLINA PROFESSIONAL ENGINEER RUSSELL W. THOMPSON SEAL 032711

DocuSigned by: Russell W Thompson 11/21/2016

Signature: _____ Date: _____

Inventory No. C012

default \\NCF-DATA\Proj\360655_U-5742_Fay-Sig\Project\Sigs\Design\100%\FINAL SEALED PLANS\Revised 1172016\Hillsboro.et.Boundary.dgn 11/17/2016 3:38:54 PM