
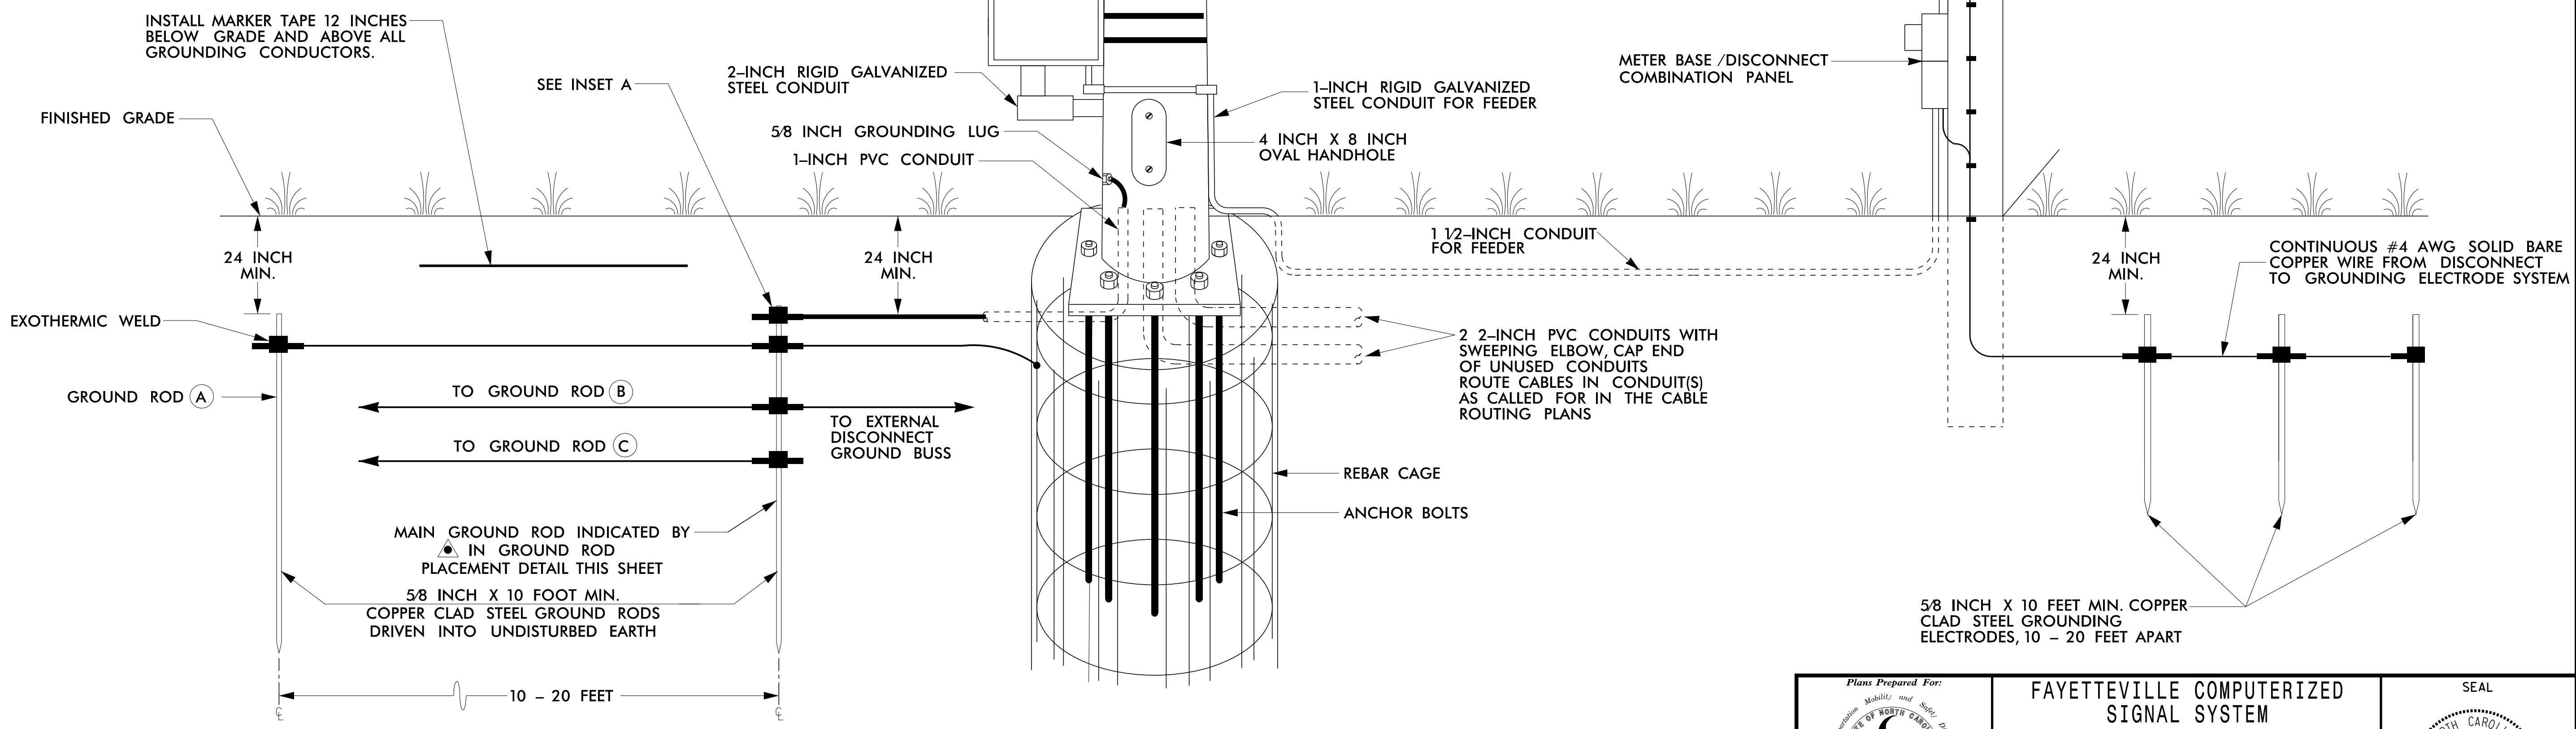


- NOTES**
1. BOND 0.5 INCH DIAMETER, 28 STRAND (MINIMUM) CLASS II COPPER CONDUCTOR TO THE MAIN GROUND ROD BY AN EXOTHERMIC WELD METHOD.
 2. EXOTHERMICALLY WELD ALL CONNECTIONS TO GROUND RODS.
 3. BOND #4 AWG SOLID BARE COPPER WIRE TO REBAR CAGE AND THE MAIN GROUND ROD BY AN EXOTHERMIC WELD METHOD.
 4. ENSURE CAMERA HOUSING, CAMERA, AND PAN -TILT UNIT ARE BONDED TO POLE.
 5. REMOVE BONDING JUMPER BETWEEN EQUIPMENT CABINET GROUND BUSS AND NEUTRAL BUSS.
 6. THE CONTRACTOR MAY, UPON APPROVAL OF THE ENGINEER, INSTALL A 30-FOOT SECTIONAL GROUND ROD WHEN CONDITIONS WILL NOT ALLOW FOR THE INSTALLATION OF THE 3 - RADIAL GROUND RODS.
 7. INSTALL MARKER TAPE DIRECTLY ABOVE ALL GROUNDING ELECTRODES AND CONDUCTORS AT A DEPTH OF 12 INCHES.

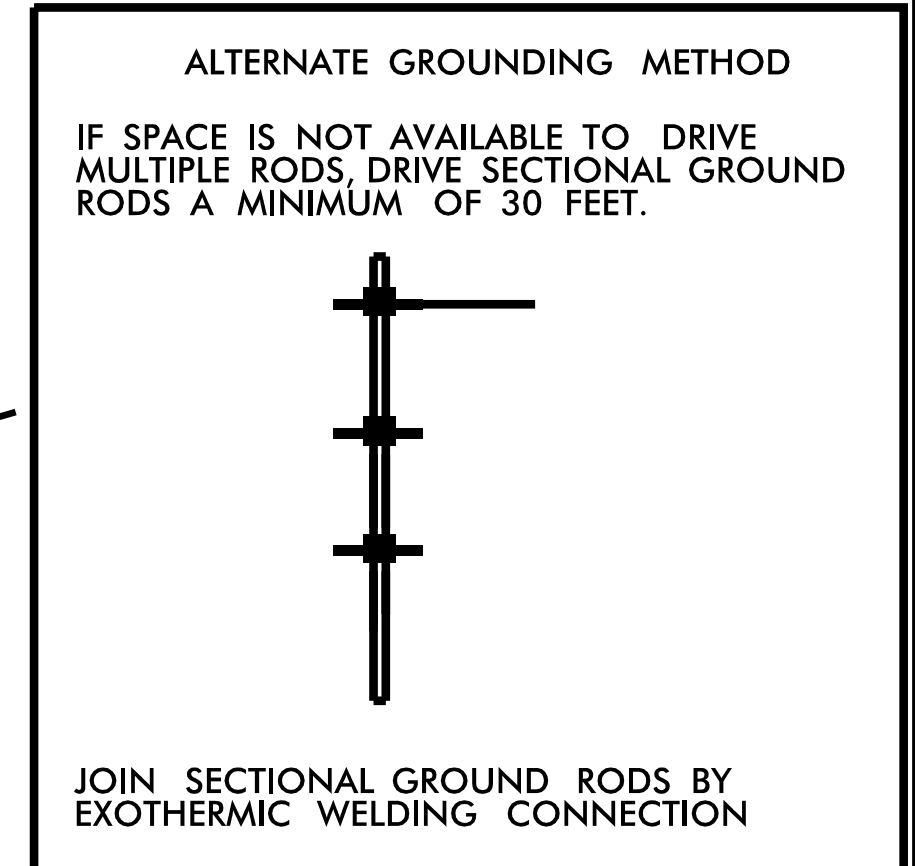

11/15/2016 K:\RAL\TPTD_ITS\01036305 - Fayetteville Sig Sys\Plans\01036305-ITS_psh_9.dfl.dgn

Kimley»Horn
 NC License #F-0102
 421 Fayetteville St., Suite 600
 Raleigh, NC 27636
 Tel: (919) 677-2000
 Fax: (919) 677-2050

	FAYETTEVILLE COMPUTERIZED SIGNAL SYSTEM CCTV CAMERA WITH CABINET ON METAL POLE		SEAL NORTH CAROLINA PROFESSIONAL ENGINEER SEAL 030472 KEVIN W. SMITH 11/15/2016
	DIVISION 06 CUMBERLAND COUNTY PLAN DATE: NOVEMBER 2016 REVIEWED BY: K. NICHOLAS PREPARED BY: J. GROSS REVIEWED BY: K. SMITH		
SCALE 0		REVISIONS INIT. DATE	