


## LEGEND

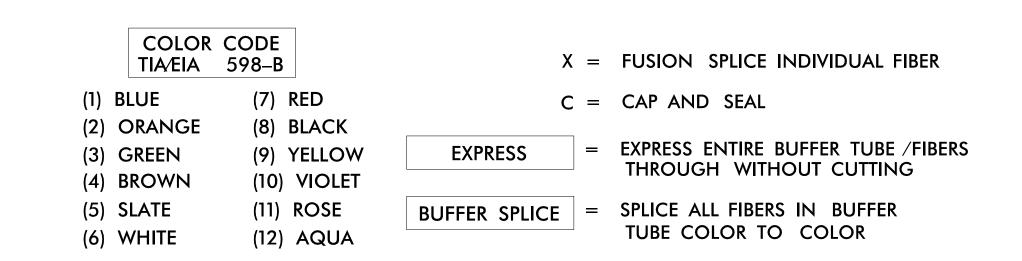

## NOTES

- 1. UNUSED FIBERS LEFT COILED AND STORED IN SPLICE TRAY
- 2. UNUSED BUFFER TUBES LEFT COILED AND STORED IN SPLICE ENCLOSURE
- 1) FIVE (5) DAYS PRIOR TO BEGINNING WORK ON THE SIGNAL SYSTEM, CONTACT THE DIVISION 6 TRAFFIC ENGINEER AT (910) 364–0606 TO NOTIFY OF WORK TO BE PERFORMED ON EXISTING SYSTEM.
- 2) ETHERNET SWITCH TERMINATION CONFIGURATIONS ARE GENERIC. CONTRACTOR IS RESPONSIBLE FOR DETERMINING \ ENSURING PROPER TERMINATIONS.
- 3) INCLUDE ON THE COVER OF EACH SPLICE TRAY THE FOLLOWING: REFERENCE SECTION 1731 "FIBER OPTIC SPLICE ENCLOSURE"
  - 1) SPLICE LOCATION
  - 2) DATE
  - 3) COMPANY NAME
  - 4) NAME OF INDIVIDUAL PERFORMING THE SPLICING

PRIOR TO INSTALLING THE COVER ON THE SPLICE TRAY TAKE A DIGITAL PHOTOGRAPH SHOWING THE SPLICE TRAY AND INFORMATION SHOWN ABOVE (1–4) AND SUBMIT PHOTOGRAPH ALONG WITH OTDR TEST RESULTS.

