


- NOTES:**
1. NCDOT CONTRACTOR ATTACH TO FRONT SIDE OF POLE AT 40" BELOW POWER PRESENCE UNLESS OTHERWISE NOTED.
  2. SEE SUMMARY OF WORK TABLES FOR ADDITIONAL CABINET AND COMMUNICATIONS WORK TO BE PERFORMED.
  3. MAINTAIN A MINIMUM OF SIX (6) FEET FROM THE EDGE OF PAVEMENT WHEN TRENCHING PARALLEL TO THE ROADWAY UNLESS OTHERWISE NOTED.
  4. INTEGRATE NEW FIBER OPTIC INTERCONNECT CENTER WITH EXISTING FIBER OPTIC ETHERNET SWITCH TO ESTABLISH COMMUNICATIONS.

11/15/2016 K:\ARL\TPTD\ITS\01036305 - Fayetteville Sig Sys\Plans\01036305\_ITS\_psh\_88.dgn

**Kimley»Horn**  
 NC License #F-0102  
 421 Fayetteville St., Suite 600  
 Raleigh, NC 27636  
 Tel: (919) 677-2000  
 Fax: (919) 677-2050

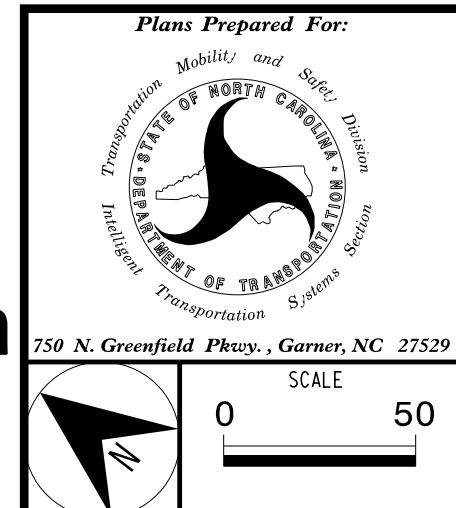

Plans Prepared For:		FAYETTEVILLE COMPUTERIZED SIGNAL SYSTEM		SEAL	
DIVISION 06		CUMBERLAND COUNTY		NORTH CAROLINA PROFESSIONAL ENGINEER	
PLAN DATE:	NOVEMBER 2016	REVIEWED BY:	K. NICHOLAS	KEVIN W. SMITH	
PREPARED BY:	J. CROSS	REVIEWED BY:	K. SMITH	11/15/2016	
REVISIONS	INIT.	DATE	SIGNATURE		
CADD Filename:					