
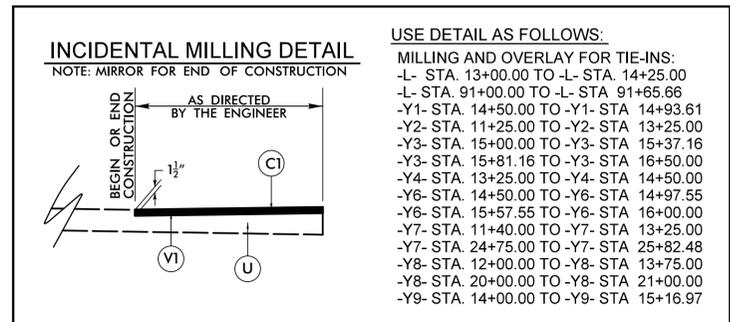



6/2/2026

PAVEMENT SCHEDULE (FINAL PAVEMENT DESIGN)			
C1	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.	R1	2'-6" CONCRETE CURB AND GUTTER.
C2	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.	R2	6" CONCRETE DRIVEWAY
C3	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT TO EXCEED 2" IN DEPTH.	S	4" CONCRETE SIDEWALK
D1	PROP. APPROX. 2.5" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.	T	EARTH MATERIAL.
D2	PROP. APPROX. 4" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.	U	EXISTING PAVEMENT.
D3	PROP. VAR. DEPTH ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 2 1/2" IN DEPTH OR GREATER THAN 4" IN DEPTH.	V1	INCIDENTAL MILLING
E1	PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.	V2	MILLING BITUMINOUS PAVEMENT. 2.5" DEPTH.
E2	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 5 1/2" IN DEPTH.	W	VARIABLE DEPTH ASPHALT PAVEMENT (SEE STANDARD WEDGING DETAIL 1)
J	6" AGGREGATE BASE COURSE	PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.	

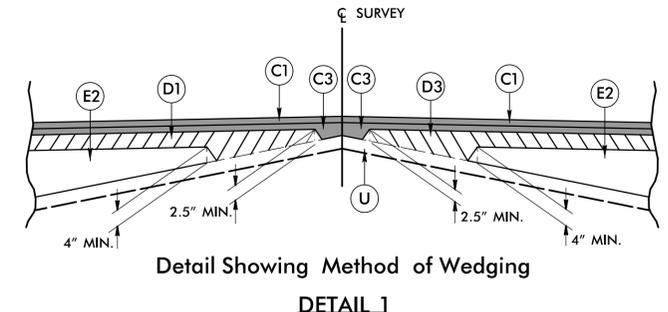


PROJECT REFERENCE NO. W-5704E	SHEET NO. 2A-1
ROADWAY DESIGN ENGINEER PROFESSIONAL SEAL 19724 1/26/2026	PAVEMENT DESIGN ENGINEER PROFESSIONAL SEAL 040774 1/26/2026
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	
TGS ENGINEERS 706 HILLSBOROUGH ST. SUITE 200 RALEIGH, NC 27603 PH (919) 773-8887 CORP. LICENSE NO.: C-0275	

PAVEMENT SCHEDULE (FINAL PAVEMENT DESIGN)	
C1	1.5" S9.5C
C2	3" S9.5C
C3	VAR. S9.5C
D1	2.5" I19.0C
D2	4" I19.0C
D3	VAR. I19.0C
E1	4" B25.0C
E2	VAR. B25.0C
J	6" ABC
R1	2'-6" C & G
R2	6" CONC. DRIVEWAY
S	4" SIDEWALK
T	EARTH MATERIAL
U	EXIST. PAVEMENT
V1	INC. MILLING
V2	MILLING, 2.5"
W	WEDGING
PAVEMENT EDGE SLOPES 1:1 UNLESS NOTED OTHERWISE	

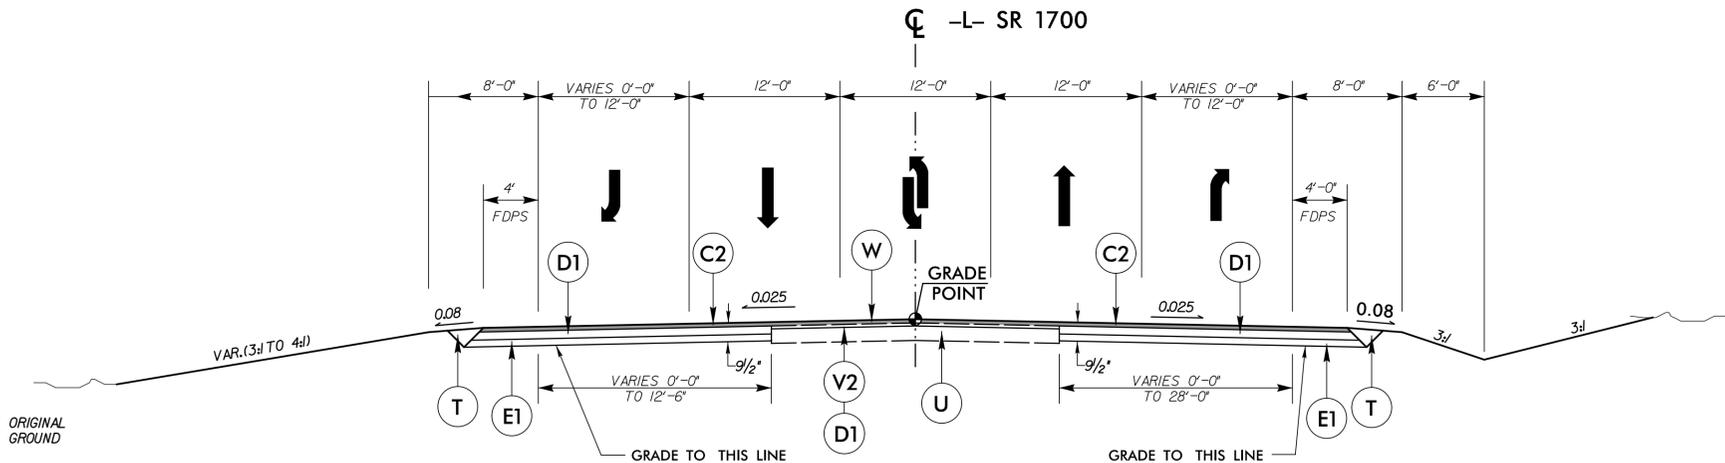

TYPICAL SECTION NO. 1

USE TYPICAL SECTION NO. 1:
 FROM -L- STA. 13+00.00 TO 41+65.00
 FROM -L- STA. 44+00.00 TO 71+00.00
 FROM -L- STA. 82+00.00 TO 91+65.66

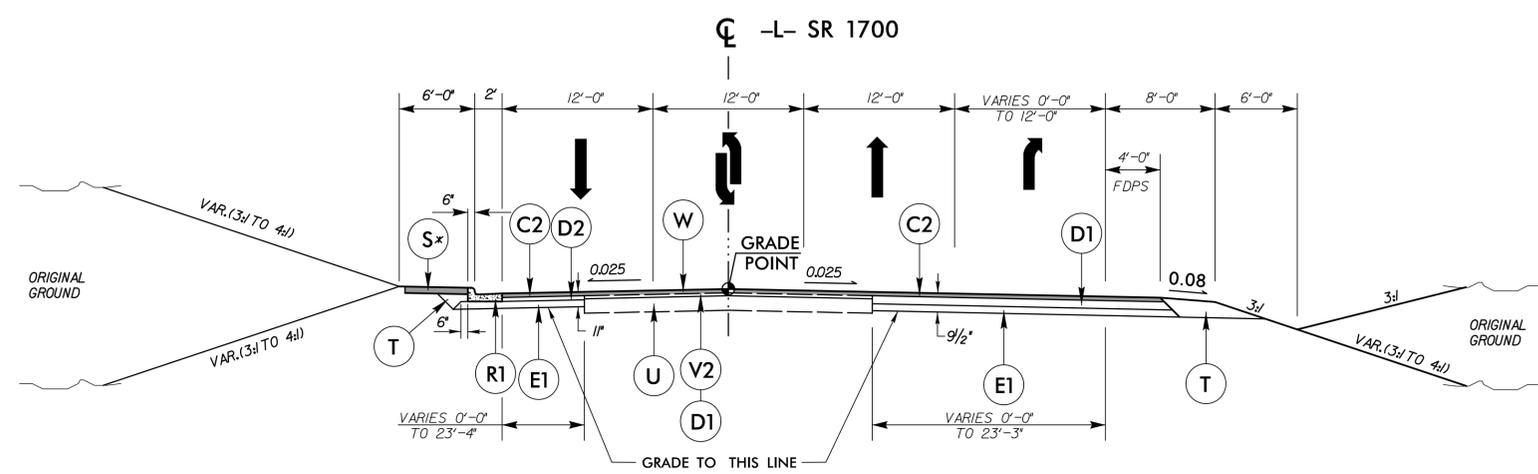

TYPICAL SECTION NO. 2

USE TYPICAL SECTION NO. 2:
 FROM -L- STA. 41+65.00 TO 44+00.00 (MIRROR)
 FROM -L- STA. 71+00.00 TO 82+00.00

* CONSTRUCT SIDEWALK IN THE FOLLOWING LOCATION:
 FROM -L- STA. 71+00.00 TO 82+00.00 LT

I:\26\2026\11\16\2026\W-5704e\roadway\proj\W-5704E_RDY_TYP.dgn